


# Trove2AX2 (Enclosure & Backplane) / TAX2 (Backplane)

Access & Power Integration Solution for Axis Communications



Altronix Trove™ enclosures and backplanes let you easily integrate Altronix power with Axis access controllers and accessories. Trove simplifies board layout and wire management, reduces installation time and labor costs.

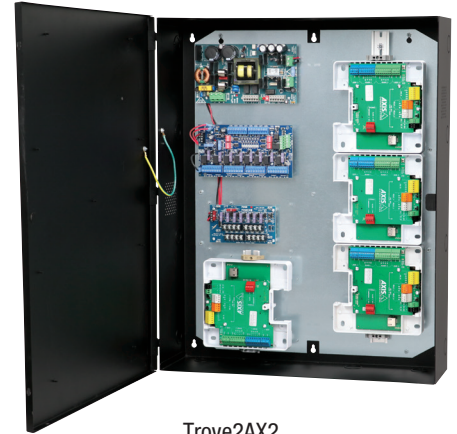

Trove2AX2

*Altronix / Axis Communications boards are not included*

## Trove2AX2 (Trove2 Enclosure + TAX2 Backplane) TAX2 (Backplane) Features

- Accommodates the following Axis controllers with or without Altronix power/accessories: A1601, A1610 or A1210-B modules
- Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove2 enclosure, one (1) removable TAX2 backplane and DIN Rails for mounting Axis Communications controllers

### Features

- Simplifies board layout and wire management
- Convenient knockout configuration:
  - One (1) double knockout  
1.948" (1-1/2" Conduit) / 1.701" (1-1/4" Conduit)
  - Nine (9) double knockouts  
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Accommodates up to four (4) 12VDC/12AH batteries
- 16 AWG powder coated steel
- Includes cam lock, tamper switch and mounting hardware

### Agency Listings

- UL: UL294 - Access Control System
- cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
- CE European Conformity

### Physical and Environmental

#### Trove2AX2 - Dimensions (H x W x D):

- Enclosure: 27.25" x 21.5" x 6.5" (692mm x 546mm x 165mm)
- Shipping: 32.5" x 26.5" x 11.125" (826mm x 673mm x 283mm)

#### Trove2AX2 - Weights (approx.):

- Product: 37.1 lb. (16.83 kg)
- Shipping: 40.85 lb. (18.53 kg)

#### TAX2 - Dimensions (H x W x D):

- Backplane: 25.375" x 19.375" x 0.3125" (645mm x 492mm x 8mm)
- Shipping: 26.5" x 20.5" x 1.25" (673mm x 521mm x 32mm)


#### TAX2 - Weights (approx.):

- Product: 8.0 lb. (3.63 kg)
- Shipping: 10.0 lb. (4.53 kg)

*All registered trademarks are property of their respective owners.*

**Access Controller Position Chart for the Following Models:**

Altronix/Axis	Pem Mounting
AL400ULXB2, AL400ULXB2V, AL600ULXB, AL600XB220, AL1012ULXB, AL1012XB220, AL1024ULXB2, AL1024XB2V, eFlow4NB, eFlow4NBV, eFlow6NB, eFlow6NBV, eFlow102NB, eFlow102NBV, eFlow104NB, eFlow104NBV, PoE60, PoE201, PoE240, Tango1B, ACM8, ACM8CB, ACMS8, ACMS8CB, ACMS12, ACMS12CB, LINQ8ACM, LINQ8ACMCB	(A)
ACM4, ACM4CB, LINQ8PD, LINQ8PDCB, MOM5, NETWAY5A, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, PDS16, PDS16CB, VR6	(B)
NetWay4EBTB, NetWaySP3B, NetWaySP4B, NetWaySP8B	(C)
Axis 1601, Axis 1610 (mounted onto DIN Rail)	(D)
Axis 1210	(E)

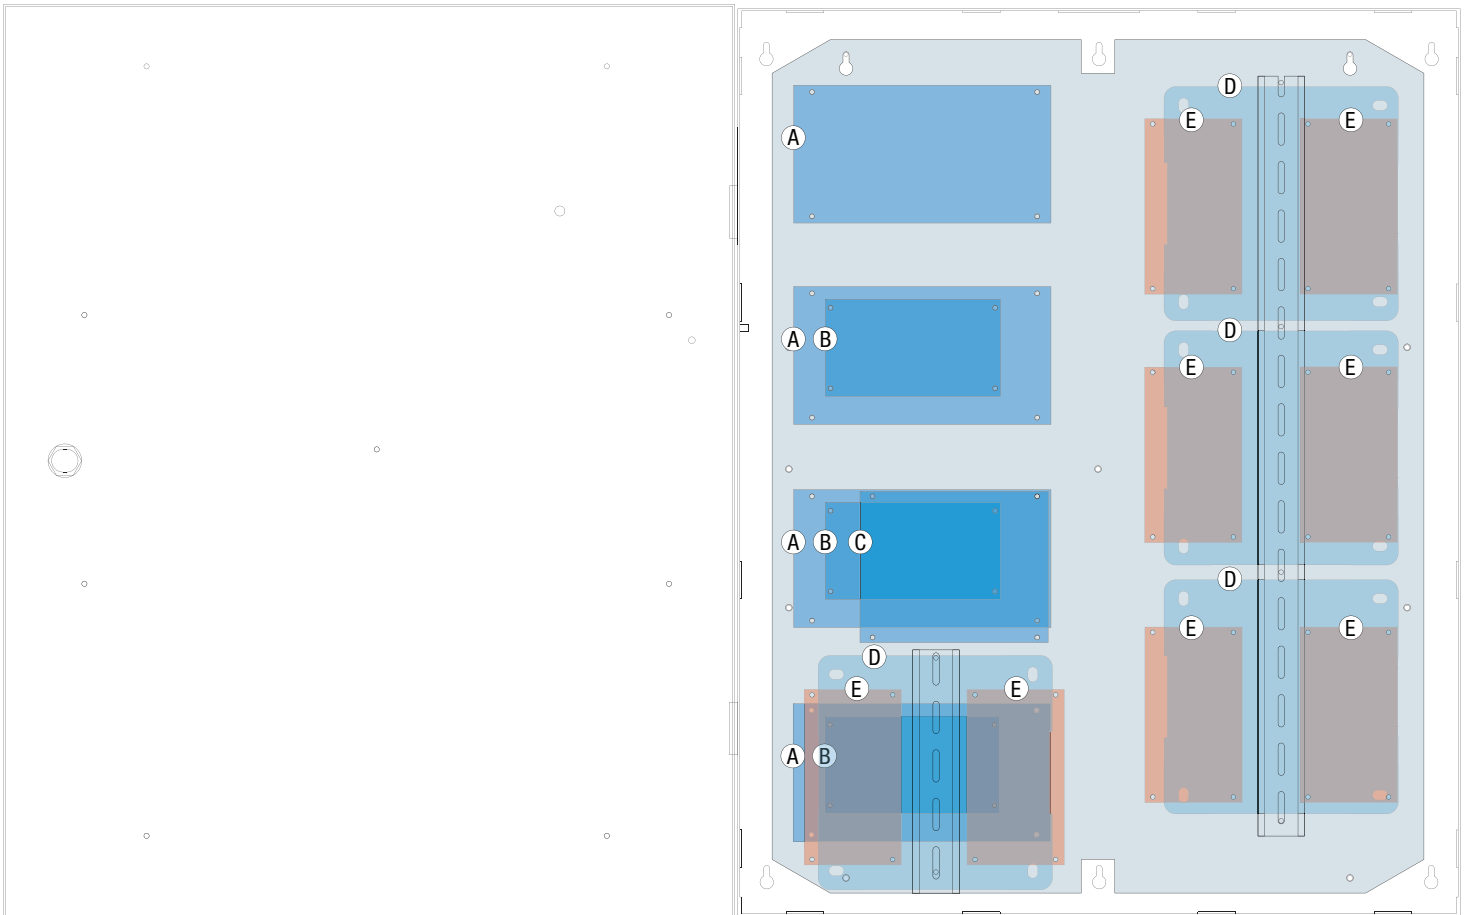

**Accessories** (order separately)



WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**


Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

**MM4, MM8, MM12, MM24 - Magnetic Mounting Solution**

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

**BR1 - Sub-Assembly Mounting Bracket**

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC  
with  
batteries



Trove2BWC  
with  
wires



**TROVE2BWC - Battery/Wire Trough Enclosure**

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

**Dimensions and Drawing**

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

