

WALL PLATE TRANSMITTERS

AC-CXWP-HDMO-T HDMI WALL PLATE TRANSMITTER

QUICK START GUIDE

These single gang, HDBaseT wall plate transmitters are a part of ConferX's line of professional audio video products. Installing these sleek transmitters is a breeze as they are built to fit in any standard single gang mug ring, but their sleek design is only the beginning. The entire ConferX line of products are built to military grade standards to ensure stable connections for long periods of time.

Simplify installations in schools, offices, meeting rooms and huddle rooms. Once integrated into your client's system he now has the perfect solution for sharing information from any computer or source. This unit is designed to work flawlessly with all PC, VESA and traditional resolutions 4K 60Hz 4:2:0 8-bit & HDR 4:2:2 12 BIT. With the AC-CXWP-HDMO-T you get a sleek look your client will like, a stable connection that lasts and a product that works seamlessly with any source you throw at it.



THIS QUICK START GUIDE WILL BE GOING THROUGH:


- AC-CXWP-HDMO-T
- INSTALLATION / RECOMMENDED CONNECTION ORDER
- EDID MANAGEMENT
- TROUBLESHOOTING

AC-CXWP-HDMO-T

There are 3 lights on the HDMO wall plate:

Power Light- turns on once the wall plate is powered on
Link Light- turns on once the wall plate is linked with the receiver.

Active Light- turns on once an active HDMI cable is plugged into the wall plate.

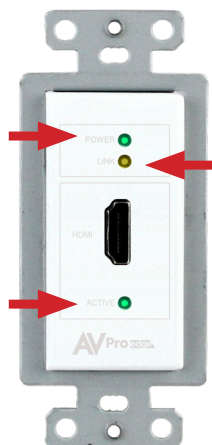

INSTALLATION OF THE WALL PLATE EXTENDERS AND CONNECTION ORDER:

- 1) Mount the wall plate in the mud ring.
- 2) Connect category cable between the Wall Plate and the Receiver*
- 3) Plug in the power into the Receiver. The Wall Plate Transmitter will receive power from the receiver through the Cat Cable (POE)**
- 4) Plug in a HDMI cable from the receiver to the display.
- 5) Last step: plug in a HDMI from the source to wall plate.
- 6) Source will now transmit to display.

*If the Cat Cable is connected correctly a solid amber light with a flashing green light will turn on at the ethernet port. This means there is a good link and that data is being transmitted between the wall plate and receiver.

**If you will be using the unit directly into a NON POE Provider (AVR, Projector, Display, or other HDBaseT receiver), you can power it using a 5V MINI USB Type power supply. We recommend the AC-PSU-5V-MINI-USB.

EDID MANAGEMENT:

EDID management allows you to manage the input device (typically the display) to request specific video resolutions and/or audio codecs from a source. EDID can be toggled using the turn dial (Located on bottom of unit opposite of HDBT port).

Use a flathead screwdriver to toggle between different preset EDIDs by twisting the dial to the preferred EDID.



The following choices are available:

0. 4K60HZ 420 3D 2Ch [Default]
1. 4K60HZ 420 3D 4CH
2. 4K60HZ 420 3D 8CH
3. 4K60HZ 420 HDR BT2020 3D 2Ch
4. 4K60HZ 420 HDR BT2020 3D 6Ch
5. 4K60HZ 420 HDR BT2020 3D 8Ch
6. 4K30HZ RGB 3D 2CH
7. 4K30HZ 444 3D 6CH
8. 4K30HZ 444 3D 8CH
9. 4K30HZ 444HDR BT2020 3D 2CH
- A. 4K30HZ 444HDR BT2020 3D 6CH
- B. 4K30HZ 444HDR BT2020 3D 8CH
- C. 1080P60 RGB 8 BIT 3D 2CH
- D. 1080P60 444 3D 6CH
- E. 1080P60 444 3D 8CH
- F. Copy from output

When using projectors RGB edid setting is recommended.

EDID can be managed using all wall-plate transmitters (VGA, HDMO) and the EX70-444-RNE-P receiver.

TROUBLESHOOTING:

Having problems? Here are some general troubleshooting tips that may help:

(We recomend every integrator have the fox & hound troubleshooting kit. That way you have a definitive answer when having problems with HDMI)

1. Try different HDMI cables. A defective HDMI cable can bring the entire system down.
2. If using short HDMI cables (.5m, 1m) try a longer cable. Some short HDMI cables do not sync well.
3. Ensure you have the correct EDID settings selected.
4. Re-terminate the Category cable (even if a cable tester indicates that the cable is passing signal).
5. Avoid RJ45EZ connectors
6. Check the Category cable length. It may be too long.
7. Remove any excess Category cable and be sure that it is not twisted or damaged.
8. If you are still having issues after troubleshooting, feel free to contact our Tech Support department.

**HAVE A QUESTION OR NEED ASSISTANCE?
DON'T HESITATE TO CONTACT US!**

**SUPPORT: +1 605-274-6055
USA TOLL FREE: 877-886-5112
EMAIL: SUPPORT@AVPROEDGE.COM**