


# LPS3AC

## Linear Power Supply/Charger

Altronix LPS3AC linear power supply/charger converts a low voltage AC input into a 12VDC or 24VDC output. The unit is specifically designed to provide the power needed by the most demanding security and access control applications.

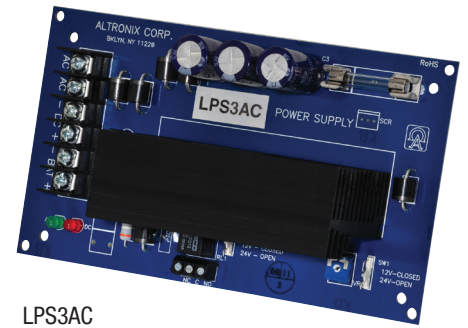

LPS3AC

### Specifications

#### Input

Voltage 16VAC or 28VAC

#### Outputs

Voltage 12VDC or 24VDC selectable  
 Current 2.5A continuous supply current  
 Other Short circuit and thermal overload protection  
 Filtered and regulated

#### Battery Charging

Type Sealed lead acid or gel type  
 Failover Upon AC loss, instantaneous  
 Batteries are sold separately

#### Indicators (LED)

Input Input voltage is present  
 DC Output Powered

#### Supervision

AC Failure Form "C" contacts

#### Physical and Environmental

Dimensions (L x W x H)  
 Board: 7" x 4" x 2" (177.8mm x 177.8mm x 50.8mm)  
 Shipping: 10" x 8" x 4" (254mm x 203.2mm x 101.7mm)

#### Weights (approx.):

Product: 1.75 lb. (0.79 kg)  
 Shipping: 2.0 lb. (0.9 kg)

#### Temperature

Operating: 0°C to 49°C (32°F to 120°F)  
 Storage: -20°C to 70°C (-4°F to 158°F)

#### Relative Humidity

85% +/- 5%

#### BTU/Hr (approx.):

12VDC: 17 BTU/Hr.  
 24VDC: 32 BTU/Hr.


### Lifetime Warranty

### Dimensions and Drawing

Board Dimensions (L x W x H approximate)

7" x 4" x 2" (177.8mm x 177.8mm x 50.8mm)

Mounting Holes' Tolerance: +/- 0.04 in. (1mm)

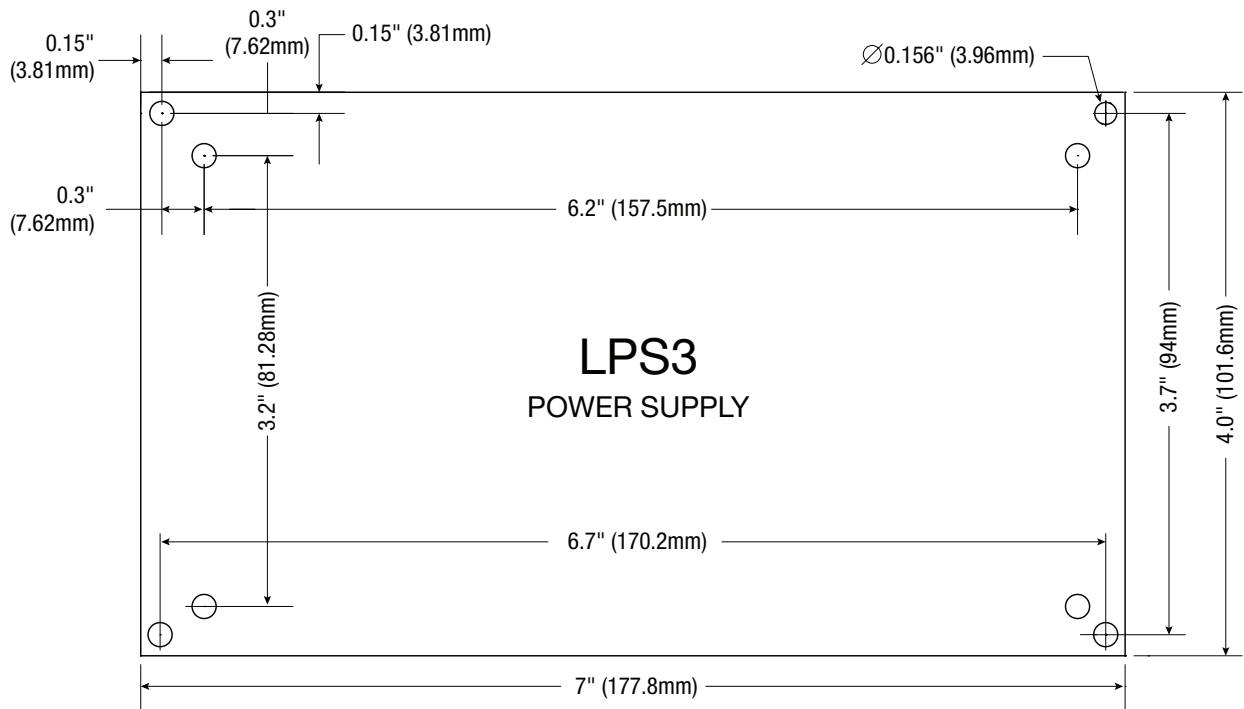

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com