


PX Lighting Control **STANDARD PLUS**



PROJECT

CATALOG #


TYPE

NOTES

The commercial-grade, multi-tap PX is a high-quality transformer that offers optional on/off control options, such as a photocell or mechanical timer. This standard transformer is available in 150 W, 300 W, 600 W, and 900 W capacities for maximum design flexibility.

Quick Facts

- Commercial-grade, 304 stainless steel construction ensures high-quality performance and long life
- Large terminal block simplifies field wire and photocell installation
- Multiple wattage options offer design flexibility
- UL-379 rating provides added safety when installing near pools and spas
- 12 V to 15 V multi-tap outputs minimize voltage loss
- Various conduit knockout sizes and locations expand installation options
- UL-1838 rating ensures safe lighting installations

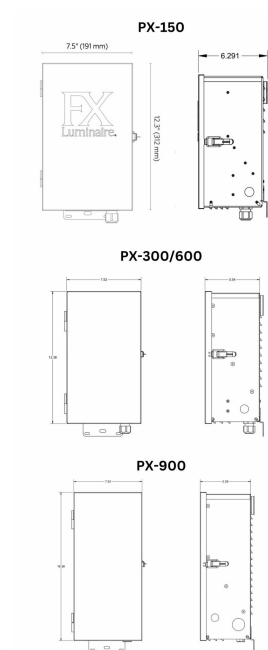

PX Lighting Control SPECIFICATIONS

Output	PX-150	PX-300	PX-600	PX-900
Power	150 VA	300 VA	600 VA	900 VA
Input Primary	120 V, 60 Hz	120 V, 60 Hz	120 V, 60 Hz	120 V, 60 Hz
Input Amperage Primary	1.25 A	3 A	5 A	8 A
Output Voltage Secondary	12 or 15 VAC	11 to 15 VAC	11 to 15 VAC	11 to 15 VAC
Maximum Open Circuit Volts	15 VAC	15 VAC	15 VAC	15 VAC
Class	2	2	2	2

PX Lighting Control SPECIFICATIONS

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

Materials

304 stainless steel

Finish

Stainless steel

Hardware

Two pan-head, machined mounting screws with plastic anchors. Stainless steel mounting brackets are attached to the transformer box.

Wiring

Heavy-gauge, grounded, water-resistant power cord with integrally molded plug; 5' (1.5 m) length. Standard low-voltage lighting wire required (e.g., 12-2, 10-2, etc./2.0 mm, 2.5 mm, etc.) between transformer and lighting fixtures.

Power

120 VAC, 60 Hz

Weight

PX-150: 18 lb (8.2 kg); PX-300: 20 lb (9.1 kg); PX-600: 25 lb (11.3 kg); PX-900: 42 lb (19.1 kg)

International Compliance

None

Installation Requirements

Designed for installation on a vertical surface in the upright position only. Transformer must be in a free airspace. Do not install in a small, sealed enclosure or direct bury.

Warranty


10-year limited warranty

Listings



PX Lighting Control ORDERING INFORMATION

[field_spec_builder_mount] [field_spec_builder_mount]




Fixture	Wattage	Compliance	Switching	Finish
PX	150	[default] 120 V	[blank] No switching option	SS Stainless Steel 
	300		PC Photocell	
	600		T Timer	
	900			





EXAMPLE FIXTURE CONFIGURATION: **PX**-XX-XXXX-XX

PX Lighting Control ORDERING INFORMATION

POWER OPTIONS: Specify Separately

Power	Catalog No.	
Low-Voltage Dimmer	DIM-LV	
Luxor Cube - Relay, 0-10V dimming	LCM-RLY-010V	
Plug-in 24VAC relay	PX-SYNC	

Power	Catalog No.	
FX Luminaire Wi-Fi Plug	FX-WIFI-PLUG	
PX Transformer photocell	PX-PC	
Lighting transformer plug-in timer	PX-TIMER	