


StarLink SLE-GSM-3/4G Model Alarm Communicator for Universal Intrusion Account Reporting

- **Universal** – Works on ALL panels and applications
- **Reports to any Central Station in North America** via dial-up or IP
- **AT&T® Network** for reliable alarm reporting on one of the most secure, cyber-protected multibillion-dollar cellular networks for maximum security & liability protection
- **Full event reporting from any panel**, anywhere*, field-proven to work virtually anywhere, on Panels using Contact ID or 4/2.
- **Easiest, fastest installation** & activation with auto-dialer capture
- **Powered by Panel, No separate power supply** required (Low current, 71mA).
- **My StarLink Remote On/Off Consumer App** for One-Button Remote Arm/Disarm any panel brand w/ keyswitch input. Also email/text message (option)
- **Generous Trade-up Incentive** available when you upgrade from old radios, networks, POTs, landlines or new installs, see npscosecurity.com/starlink

Consumer App for Remote Arm/Disarm
Available on iTunes & GooglePlay



SLE-GSM-3/4G

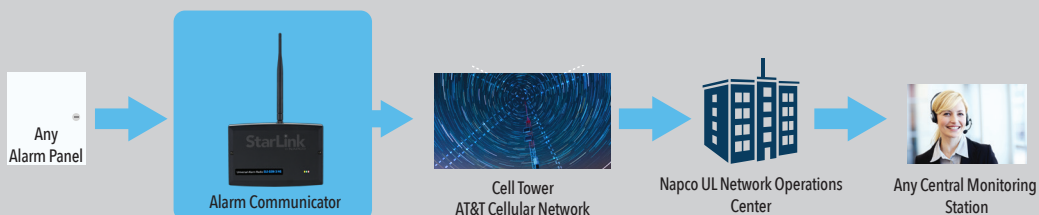

StarLink SLE-GSM-3/4G Model Alarm Communicator for Universal Intrusion Account Reporting

FEATURES

- ◆ **Full event reporting from any panel, anywhere*, field-proven to work virtually anywhere in North America, on Alarm Panels using Contact ID or 4/2.**
- ◆ **Ultra-Affordable** enough to standardize on for primary or backup reporting on every account
- ◆ **Generous Trade-up Incentive** - Upgrade to StarLink from old radios, networks, POTs, landlines or new installs. See full details online www.napcosecurity.com/starlink
- ◆ **Simplest 4-Step, 4-Wire Installation & Easiest Activation** - Just Enter a Radio ID. Napco Auto-Dialer Capture completes all (no entering phones nos., formats, account nos.)
- ◆ **Reports to any Central Station.** NO special equipment. NO radio activation fee
- ◆ **Patented Signal-Boost™ Technology** for unprecedented reliability even in remote/fringe areas
- ◆ **My StarLink™ Smart Phone App** for Consumer Remote Arm/Disarm on any panel brand with keyswitch input.
- ◆ **Cellular or Optional Dual Path Cell &/or IP Communications** on leading cyber-protected multibillion dollar network - Coverage thruout North America
- ◆ **Takeover Feature** - Easily captures any panel's existing CS phone number and allows rerouting to another central without going to the panel
- ◆ **Bonus: Full High-Speed Napco Panel Up/Downloading** - Remote super-speed uploading/ downloading, requires cable, SLE-DLCBL (see below).
- ◆ **Choice of economical subscriber service plans**, separately available at www.napcocomnet.com

SECURE & EASY INSTALLATION

- ◆ **Simplest 4-Step Installation: Register, Mount, Wire & Power-up**
 - STEP 1. Register** account online www.napcocomnet.com and select options
 - STEP 2. Mount** StarLink & attach antenna
 - STEP 3. Wire For Primary Reporting connect 4 Wires** (2 ea. Power (12V & Ground) & 2 ea. Panel (Tip & Ring); For Backup Applications use 6 Wires, those 4 + 1 ea. Tip and Ring
 - STEP 4. Apply Power** (See signals coming through online, in real time)
- ◆ **Long Range** - Precision antenna design for maximum range, place unit up to 100 feet from the control panel for best antenna location (Also, new optional high-performance remote antenna below)
- ◆ **Powered by Panel, low current draw, eliminates extra equipment.** Built in power supply uses Alarm Panel Aux power as power source. (Optional Smart Charge Module also available, see ordering info)
- ◆ **Primary or Backup Reporting** - Jumper selectable option
- ◆ **Patented Signal-Boost™ Technology**, throughout the communication transmission & reception, i.e., at both the radio and the Network Operations Center (NOC), super-amplifies alarm signals and wave shapes for unprecedented reliability even in remote/fringe areas
- ◆ **Secure Encrypted Communications & UL Network Operations Center (NOC)** - StarLink radios will securely report full data to any central station you choose with no special equipment. They communicate to carrier infrastructure using spread spectrum at the communications transport level, with authentication done via CAVE (Cellular Authentication and Voice Encryption) protocol for GPRS/GSM (GEA3) and TCP/IP data using a proprietary encryption scheme. Carrier infrastructure connects to NAPCO's UL Network Operations Center using VPN IPsec with 128 bits of encryption. (Encrypted alarm and up/download packets where applicable)
- ◆ **Easy 24/7 Account Management & Real-Time Status Monitoring** of all radio accounts online at www.napcocomnet.com (e.g., online, offline, check-in, signal strength level, trouble conditions, low battery/voltage input)
- ◆ **Over-the-Air Upgradeable Communicator Firmware.** Remote ability for critical/mandatory updates, without a truck-roll
- ◆ **Full high-speed control panel upload/download supported on Gemini™ & Gemini Commercial P816/1632/1664 and P9600/3200/X255 and GEMC/ Firewolf Commercial series panels.** (Note: Requires cable; #SLE-DLCBL)

SPECIFICATIONS, STANDARD MODELS:

- ◆ **Housing:** Durable ABS plastic (black) includes three keyhole slots for mounting (easy alignment with triple gang boxes)
- ◆ **Dimensions:** 13.5cm x 20cm x 4cm (5-3/8"x 7-7/8"x 1-7/8") (HxWxD)
- ◆ **Weight:** 382.71g (13.5 oz)
- ◆ **Diagnostic LED Indicators:** Three (3): Green, Signal Strength; Amber- Busy/ Activation; Red-Trouble
- ◆ **Dual band antenna**, precision design, for North America, 2dBi+ gain
- ◆ **Patented Signal Boost™:** Signal amplification circuit and high gain performance antenna

Electrical Ratings:

- ◆ **Input Voltage:** 11-15VDC
- ◆ **Input Current:** 71mA with peak RF transmission current of 200mA

Ratings for IN 1 Burg/Fire Input:

- ◆ **Input Voltage:** 9-15VDC
- ◆ **Maximum Input Current:** Up to 2mA

Ratings for IN 2 and IN 3:

- ◆ **Maximum Loop Voltage:** 15VDC
- ◆ **Maximum Loop Current:** 1.2mA
- ◆ **End of Line Resistor (EOLR) Value:** 10K

PGM Output (3) Ratings:

- ◆ **Open Collector Outputs:** 3V Max., active; 15V Max., inactive
- ◆ **PGM Sink Current:** 50mA, Max

Environmental Ratings:

- ◆ **Operating Environment:** 0 to 49° C (32-120°F).
- ◆ **Humidity:** Maximum 93% (non-condensing)

MY HOME STARLINK APP

- ◆ **Easy single-button** security system arm/disarm control for accounts
- ◆ **Provides status update** so accounts see alarm status before and after arming or disarming command
- ◆ **App is downloadable Free** from iTunes or Google Market for iPhone/iPad/ Droids. (Select SLE-REMOTE for account in setup)
- ◆ **Makes a great demo** on salespersons' smartphones to sell prospective customers StarLink remote control capability of your security systems

ORDERING INFORMATION

- ◆ **SLE-GSM-3/4G** Standard Burglary Radio (Black), GSM 3/4G on AT&T Network



AVAILABLE OPTIONS

- ◆ **MY STARLINK APP** Optional Consumer System On/Off Remote Service with Apple & Android smart devices. (Select **SLE-REMOTE** in account setup) Download App from iTunes or Google
- ◆ **SLE-DLCBL** Gemini Up/Downloading Cable for Napco Panels (Gemini, Gemini Commercial/Firewolf), only
- ◆ **SLE-DLEXT** Optional, as above, for up/downloading, extends distance to Napco panel up to 100'
- ◆ **SLE-SMTCHG** Optional Smart Charge Module overcomes limitations of AC access or standby power. (Uses 4AH/12V Rechargeable Battery)
- ◆ **A703** Free Trifold Enduser Brochure for new and existing accounts. Use as statement Stuffer or Self-Mailer - Designed to help tradeup accounts from landlines or old cell networks.