

Grounding & Bonding

Compression Device

Compression Lug

HUBBELL

Features

- Long barrel compression lugs are the best solution for building a low-resistance bond
- HPW lugs are die index traceable when using a properly sized die for compression
- Lugs are tin plated and have an inspection window to ensure that the conductor is fully inserted



Ordering Information


| Gauge | Mounting               | Catalog Number | UPC Number   |
|-------|------------------------|----------------|--------------|
| #6    | 1/4" ID, 1 5/8" Spaced | HGBL06DK       | 662620248974 |

Listings

UL  
TIA-607 Compliant


Specifications

|                   |            |
|-------------------|------------|
| Material          | Copper     |
| Surface Finish    | Tin Plated |
| Barrel            | Long       |
| Inspection Window | Yes        |

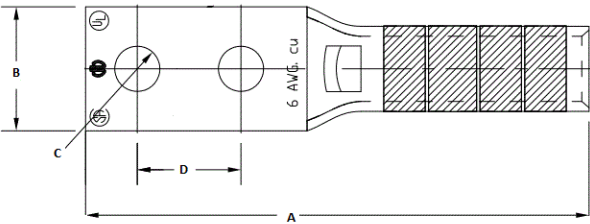

Characteristics

| Voltage Rating |           |
|----------------|-----------|
| 600V to 35 kV  | Die Index |
| 7              | UL Listed |



Accessories

|                   |            |
|-------------------|------------|
| Die               | HU5CRT     |
| Die               | HW5CRT     |
| 6 Ton Power Tool  | HPAT600LI  |
| 12 Ton Power Tool | HPAT750LI  |
| 12' Conductor     | HGRKTD144D |

Dimensions- inches (mm)

|   |            |
|---|------------|
| A | 3.1" (79)  |
| B | 0.5" (13)  |
| C | 0.3" (8)   |
| D | 1.63" (41) |

Online Resources

eCatalog