


AMX CE-REL8

Universal Control Extender with 8 Relays

CE-REL8 (AMX- CEB002)

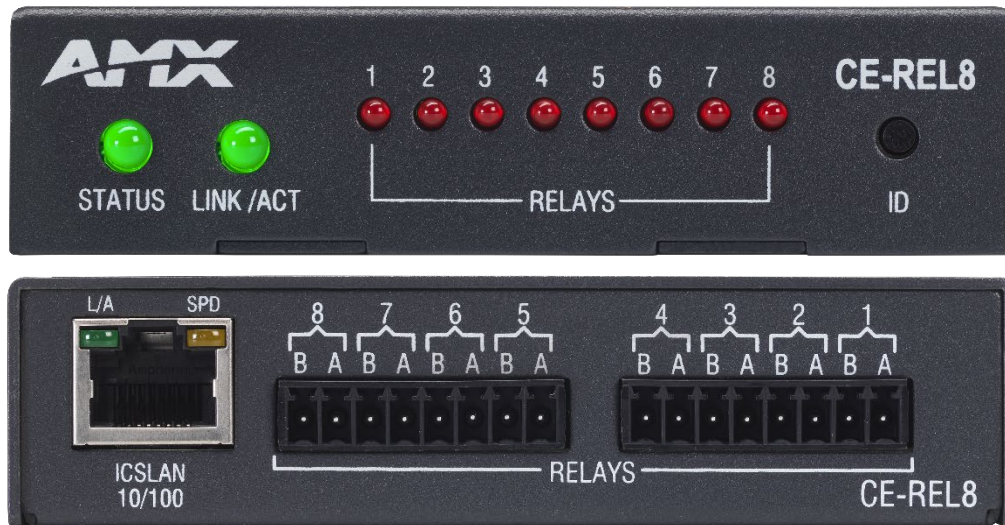

Overview

The AMX CE-REL8, Universal Control Extender with 8 relays, delivers AMX-quality hardware control to any system that supports IP connectivity. An open control API makes it simple to integrate these boxes with third-party control systems or apps, and the integrated web interface enables configuration without specialized applications. HControl enables them to be auto-discovered and integrated seamlessly with next generation AMX control processors and other HARMAN Professional products.

These universal control extender boxes provide a secure, professional-grade solution for interfacing with relay controlled devices over the network. They are PoE powered, with a small footprint for easy installation and concealment. As a network device, they extend the reach of control processors well beyond the limits inherent in point-to-point connections.

Features

- Professional-Grade Quality
- Open Control API
- Web Configuration Interface
- Compact Form-Factor
- PoE Powered
- HControl Native

Specifications

GENERAL	
Dimensions (HWD)	1" x 4 1/16" x 4 3/32" (2.5 cm x 10.3 cm x 10.4 cm)
Weight	1.02 lb (463 g)
Power	PoE Powered – No local Power Supply needed Typical Power draw: 1.9 Watts Max power draw: 3.4 Watts
Operation	8 relays, 1A @ 24VAC / 28VDC
Status LEDs	(1) Multicolor LED shows connection and power status (1) Green LED shows Ethernet Link status and activity (8) Red LEDs (1 per relay) show relay activity
Connections / Wiring	(1) RJ-45 ICS-LAN Ethernet Connector (2) 8-Pin 3.5mm captive-screw terminals
Certifications	FCC Part 15 Class B CE certification - Including EN 55022 CISPR 22 Class B (+ VCCI/Japan, C-Tick/Aus) RoHS certification REACH certification CP65 certification CB Scheme IEC 62368-1 UL Listing 62368-1