

Recessed ANSI Switch

WWW.GRISK.COM



ANSI Switch

- ◆ UL Listed
- ◆ Optimum concealment application
 - ◆ One inch gap on S.P.D.T.
 - ◆ 36" jacketed cable lead, custom lengths available
- ◆ Easy install replaces standard ANSI stainless steel door plate
- ◆ Covert installation enhances resistance to tampering or compromise



Part Number

229
229PD

SPDT
DPDT

WARRANTY: Lifetime warranty against workmanship, material and factory defects.

GEORGE RISK INDUSTRIES, INC.
G.R.I. PLAZA
KIMBALL, NE 69145


WWW.GRISK.COM



1-800-445-5218
1-800-523-1227
(308) 235-4645
FAX (308) 235-3561
E-MAIL: sales@grisk.com

Recessed ANSI Switch

WWW.GRISK.COM

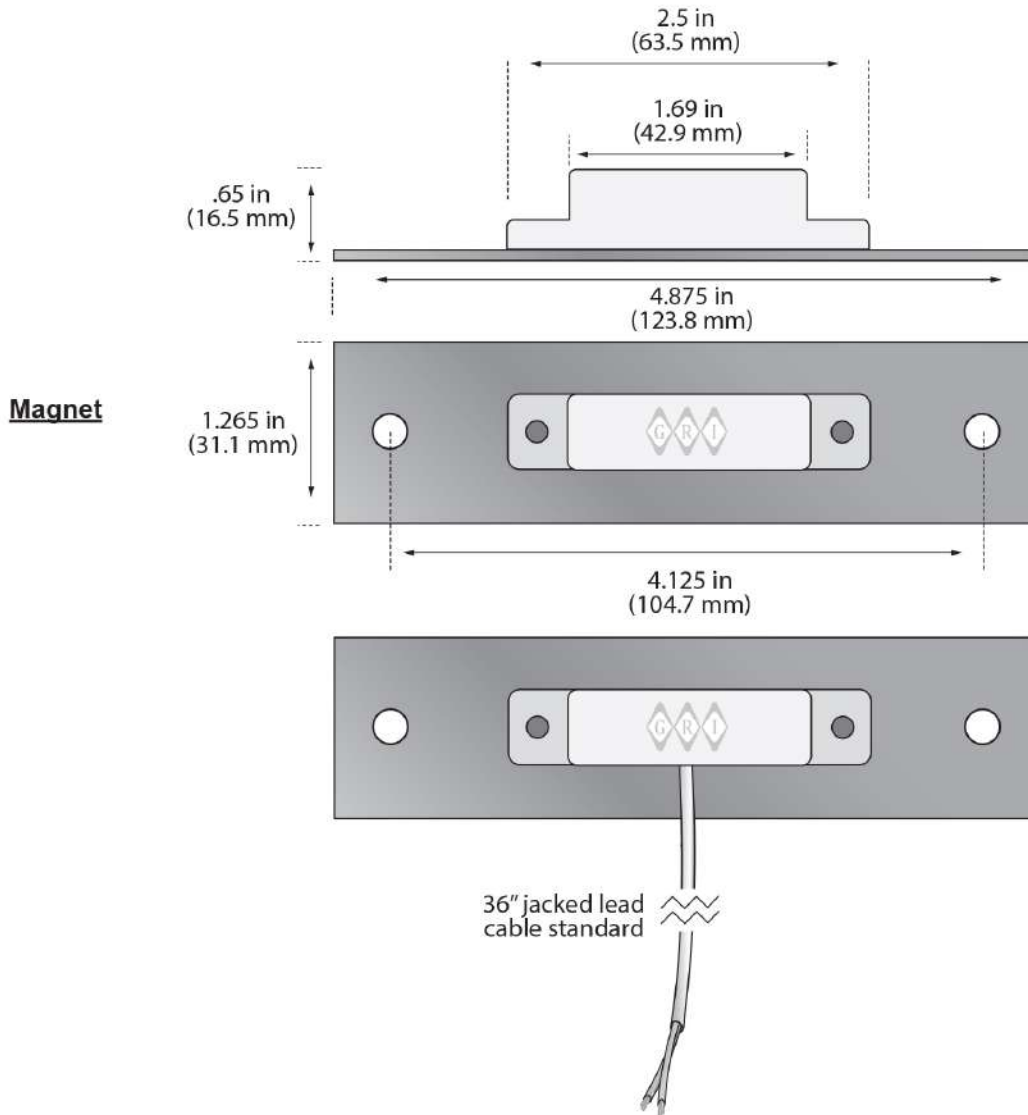

GRI PRODUCTS MEET OR EXCEED THESE MINIMUM GENERAL SPECIFICATIONS:

Part Number	Loop Type	Electrical Configuration	Reed Form	Max. Initial Contact Resistance (Ω)	Max. Contact Rating (W)	Max. Switching Voltage (VDC)	Max. Switching Current (A)
229	Open/Closed	SPDT	C	.140	5	175	.250
229PD	Open/Closed	DPDT	C	.140	5	175	.250

WARRANTY: Lifetime warranty against workmanship, material and factory defects.

GEORGE RISK INDUSTRIES, INC.
G.R.I. PLAZA
KIMBALL, NE 69145

WWW.GRISK.COM



1-800-445-5218
1-800-523-1227
(308) 235-4645
FAX (308) 235-3561
E-MAIL: sales@grisk.com