



Flush Mounting

Securing Back Box to Wall for Flush Mounting

Attach second set of wires to top of back box.

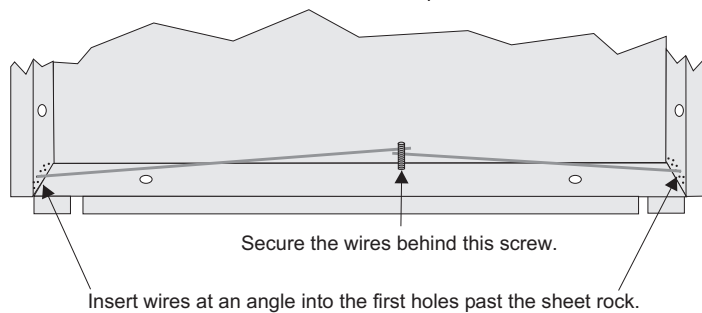

Flush Mounting with Electrical Box (Example)

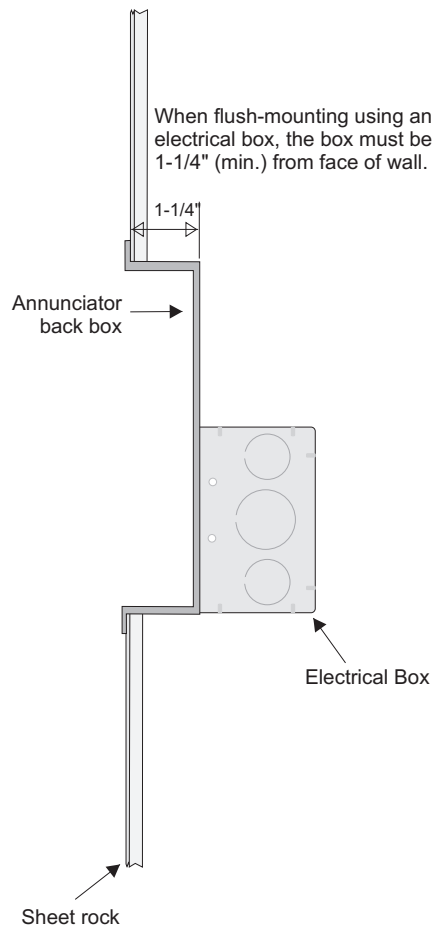

**SILENT
KNIGHT**


Model 5860 Remote Fire Annunciator Installation Quick Reference

Refer to 5820 installation manual (P/N 150972) for complete information.



Installation Steps

1. Make sure power is off at the panel.
2. Annunciator is assembled at the factory. Disassemble as needed.
3. Mount annunciator. See pages 3-4.
4. Wire annunciator to the panel. See page 2.
5. Use dipswitches to set annunciator ID. See page 2.

Annunciator Parts

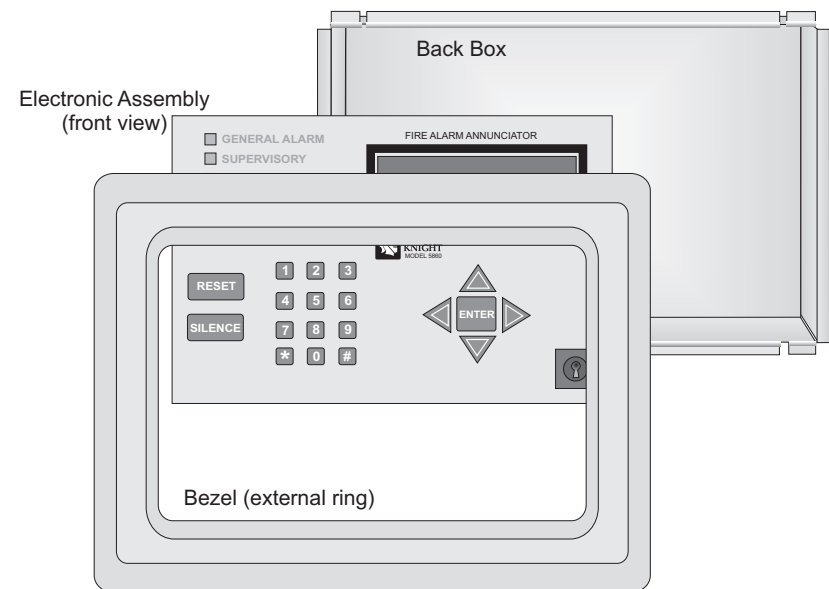

Assembled annunciator also includes mounting wires, 2 set screws.

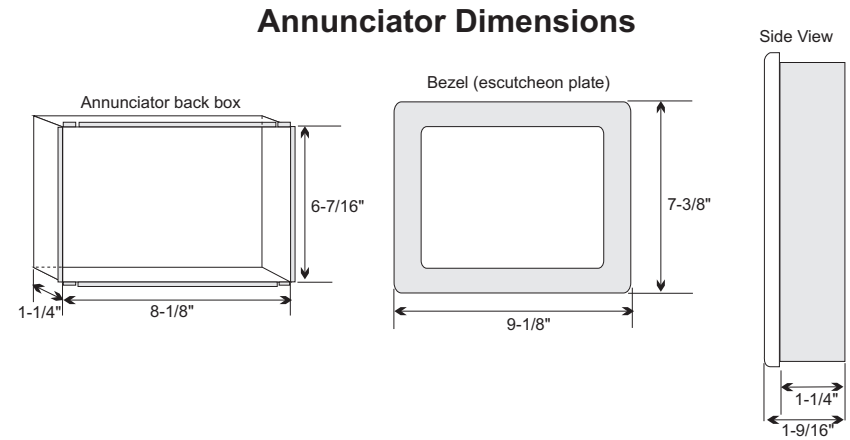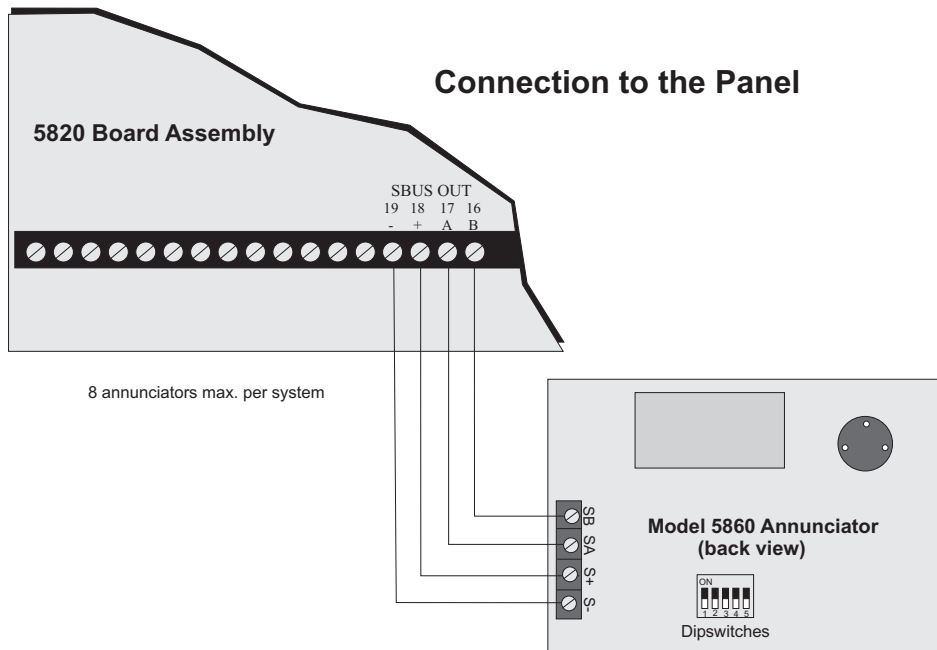

Possible ID Numbers

1 2 3 4 5	Address	1 2 3 4 5	Address
☐ ☐ ☐ ☐ ☐	*0	☐ ☐ ☐ ☐ ☐	16
☐ ☐ ☐ ☐ ☒	1	☐ ☐ ☐ ☐ ☒	17
☐ ☐ ☐ ☒ ☐	2	☐ ☐ ☐ ☒ ☐	18
☐ ☐ ☒ ☐ ☐	3	☐ ☐ ☒ ☐ ☐	19
☐ ☒ ☐ ☐ ☐	4	☐ ☒ ☐ ☐ ☐	20
☐ ☐ ☐ ☒ ☐	5	☐ ☐ ☐ ☒ ☐	21
☐ ☐ ☐ ☐ ☒	6	☐ ☐ ☐ ☐ ☒	22
☐ ☐ ☒ ☐ ☐	7	☐ ☐ ☒ ☐ ☐	23
☐ ☒ ☐ ☐ ☐	8	☐ ☒ ☐ ☐ ☐	24
☐ ☐ ☐ ☒ ☐	9	☐ ☐ ☐ ☒ ☐	25
☐ ☐ ☐ ☐ ☒	10	☐ ☐ ☐ ☐ ☒	26
☐ ☐ ☒ ☐ ☐	11	☐ ☐ ☒ ☐ ☐	27
☐ ☒ ☐ ☐ ☐	12	☐ ☒ ☐ ☐ ☐	28
☐ ☐ ☐ ☒ ☐	13	☐ ☐ ☐ ☒ ☐	29
☐ ☐ ☐ ☐ ☒	14	☐ ☐ ☐ ☐ ☒	30
☐ ☐ ☒ ☐ ☐	15	☐ ☐ ☒ ☐ ☐	31

ON ☒
OFF ☐

*Note: Address 0 cannot be used.

Surface Mounting

The Model *5860T-G/R Trim Ring is available to provide a finished look to surface-mounted annunciators.

*5860T-G is gray
5860T-R is red

