



**NAPCO SECURITY TECHNOLOGIES, INC.**  
333 Bayview Avenue, Amityville, New York, U.S.A. 11701  
800-645-9445 (631) 842-9400 FAX (631) 842-9137  
*Note: Technical Service is for alarm professionals only*

## NAPCO Tech Support

### TECH TIP




**Date:** Friday, February 21, 2025  
**Subject:** Testing the GEMC-WL-HEAT and the GEMC-WL-HEAT-2  
**Models:** GEMC-WL-HEAT, GEMC-WL-HEAT-2

To trip ("test") the GEMC heat detectors:

The rate-of-rise feature may be tested by a quick application of heat from any convenient source such as a hair dryer. However, do not apply heat exceeding the fixed temperature rating of the detector.

#### Testing the GEMC-WL-HEAT2:

- Short the red wire terminals inside the transmitter with a jumper wire:

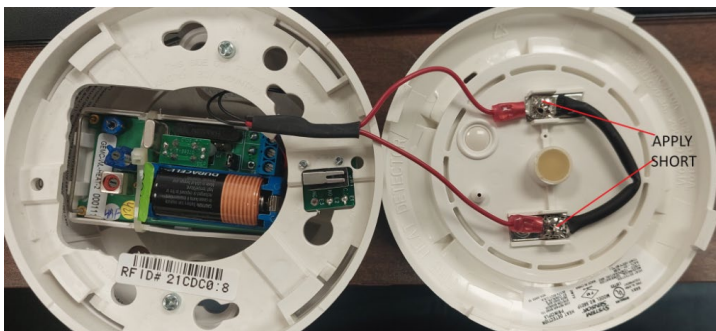

#### Testing the GEMC-WL-HEAT:

- Apply a short across the two opposite screw heads, either **HD1 to HD4** --or-- **HD3 to HD2**:

