


NEMA 12K

WALL MOUNT: MADE FOR HARSH INDOOR ENVIRONMENTS

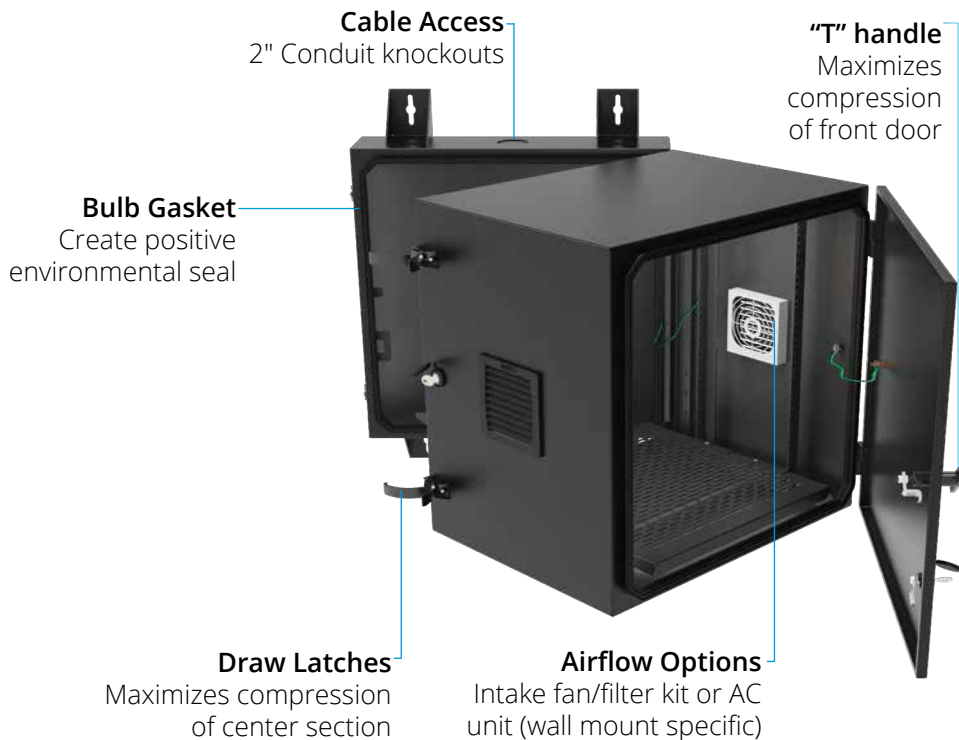


Height	Depth	Colour	Airflow	Example
GLxxN12-	xx-	x-	xxxx-	Configured NEMA12
24	24	B (Black)	AF00 (Accepts optional fan/filter [not included])	GL24N12-30-B-AFFF
36	30		AFFF (Fan/filter) ¹	(24"H x 24"W x 30"D, Black, Includes fan/filter kit
48			AC00 (Accepts optional AC [not included])	
			AC10 (1000 BTU AC) ²	
			AC13 (1300 BTU AC) ²	
			AC22 (2200 BTU AC) ³	

¹ one fan/filter included with wall mount; 36" and 48" wall mounts can accept two or three fan filters (respectively). ² 1000 and 1300 BTU AC for use with 24" and 36"H only, ³ 2200 BTU AC for use with 48"H only

FEATURES

- Two pair of #12-24 tapped mounting rails (depth adjustable)
- 2" conduit knockouts on rear section
- Reversible mounting for left-hand or right-hand opening (units with AC units cannot be reversed)
- Front and rear draw latches and "T" handle maximize compression with the center section
- Bulb gasket creates a positive environmental seal for indoor use to protect against ingress of solid foreign objects
- Standards: UL508A, NEMA 250 Type 12K, RoHS II

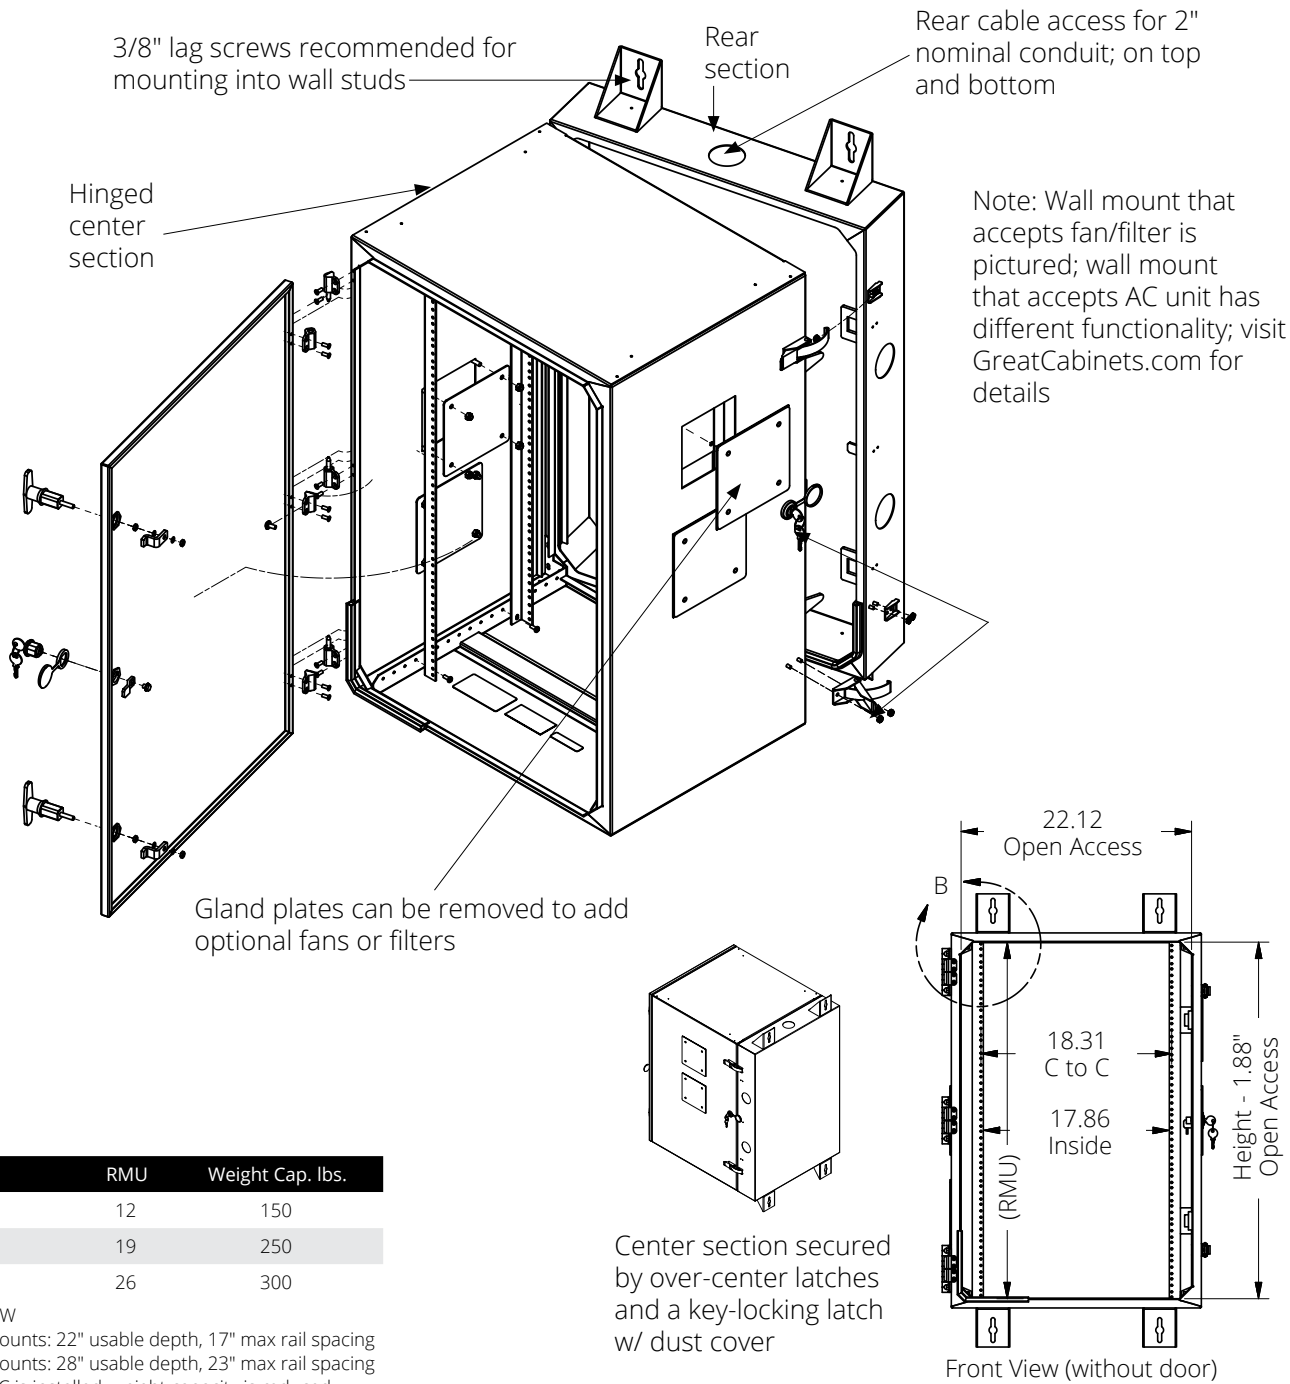

Specs	RMU	Weight Cap. lbs.
GL24N12	12	150
GL36N12	19	250
GL48N12	26	300

All sizes: 24"W
 24"D Wall Mounts: 22" usable depth, 17" max rail spacing
 30"D Wall Mounts: 28" usable depth, 23" max rail spacing
 *When an AC is installed, weight capacity is reduced

POPULAR ACCESSORIES

Part No.	Description
CM-04	Horizontal cable organizer with five 3.5" x 5", ¼ turn "D" rings; 2 RMU
CM-05	Horizontal cable organizer with five 1.5" x 3.5", ¼ turn "D" rings; 1 RMU
7219	6 receptacles, 5-15R receptacle, 5-15P plug, 15 amp, 125V powerstrip for 19" mounting
CBB-19	Copper bus bar for 19" mounting
7206-FR-A18	Stationary shelf (front/rear mount adjustable), 17.5" x 18"D, 150 lb. weight capacity