


Part Number: TF2-OS2-PVC
 2 Strand 600 µm Tight Buffer Singlemode
 OS2 9/125 TiniFiber® Micro Armor™
 YELLOW RISER (PVC) Indoor Premise,
 Duct, Conduits, and Patch

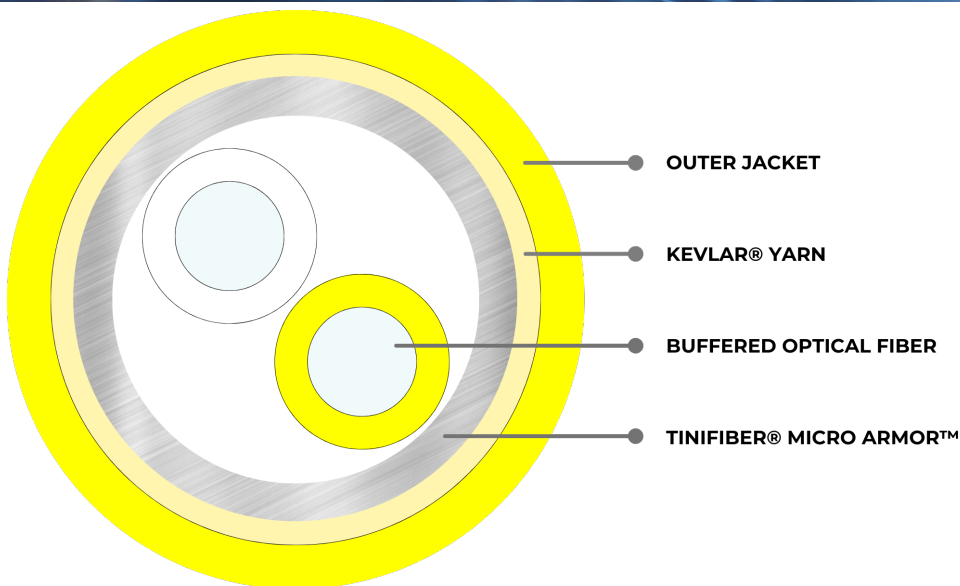

General Specifications

P/N	TF2-OS2-PVC
Application and Uses	Indoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	RISER (PVC) YELLOW
Fiber Category	Singlemode OS2 9/125
Fiber Count / Grouping	2 Strand
Construction	600 µm Tight Buffer
Water Block	FALSE
Maximum Tensile Strength (Dynamic Static)	150 N 80 N
Maximum Crush Resistance (Dynamic Static)	30 kN/m 5 kN/m
Minimum Bend Radius (Dynamic Static)	20D 10D
Nominal Outer Diameter	3.0±0.1 mm
Cable Weight	14.5 kg/km (~10 lbs/kft)
Installation Temperature	0 to 60 °C (32 to 140 °F)
Operation Temperature	-15 to 60 °C (5 to 140 °F)