


Recessed Cover Kits for 5.5" Concrete Floor Box

Two low voltage openings. Ultra-thin stamped steel flange cover, flush-to-floor in-use and blank cover. Installed UL Listed 20A tamper-resistant decorator-style receptacle.

FEATURES AND BENEFITS

- Ultra-thin flange and recessed devices reduce trip hazard caused by protruding plugs
- Six Finishes/Colors
 - Die-cast zinc cover, steel flange PLATED in brass, nickel, and antique bronze
 - OR POWDER-COATED die-cast zinc cover in black, brown, and light almond
- UL Listed

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
PLATED ZINC COVER, BLACK RECEPTACLE							
FLBC5540AB	21165	Antique Brass	1	1	6.501	5.393	3.489
FLBC5540MB	21163	Brass	1	1	6.501	5.393	3.489
FLBC5540NL	21164	Nickel	1	1	6.501	5.393	3.489
POWDER-COATED ZINC COVER, BLACK RECEPTACLE							
FLBC5540BL	21160	Black	1	1	6.501	5.393	3.489
FLBC5540BR	21161	Brown	1	1	6.501	5.393	3.489
FLBC5540LA	21162	Light Almond	1	1	6.501	5.393	3.489

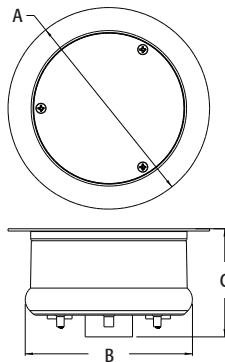


KITS INCLUDE...

Non-metallic leveling ring assembly with installed UL Listed, tamper-resistant 20A decorator-style receptacle, (2) low voltage keystone holder inserts, (2) low voltage blank inserts, blank cover w/ gasket, in-use slotted plug cover, (3) #8-32 x 5/8" flat head screws, (2) low voltage dividers



INSTALLATION INSTRUCTIONS



If using low voltage dividers cut off same amount as you cut off the box. (See instructions with product to install blank inserts into keystone holders.)



Wire receptacle and/or low voltage devices. Seal underside of flange with silicone sealant if desired (not included).



After installing flooring, secure leveling ring assembly to floor with PVC cement applied around flange.



Cover options: Install gasket and blank with #8-32 x 5/8" screws or install in-use cover (no screws required).