

VW-31 Vantage Petite Wall Wash

STANDARD BASE



PROJECT

CATALOG #


TYPE

NOTES

Packed with power, the Vantage VW-31 Petite Wall Wash features a minimal footprint that allows it to blend easily into any landscape. Compared to other fixtures in its class, this mini wall wash is 25% smaller yet generates a greater lumen output. This allows it to integrate seamlessly into low-lying foundations and intimate garden spaces without being seen. With a frosted lens and wide-beam design that produces even light patterns, it's ideal for creating transitional, fill, or highlighting effects for small to medium points of interest.

Quick Facts

- Small footprint allows fixture to easily blend into any landscape
- Frosted glass lens provides soft, even light distribution
- Wide-beam design produces smooth illumination with no hot spots
- Compatible with MR-11 lamps

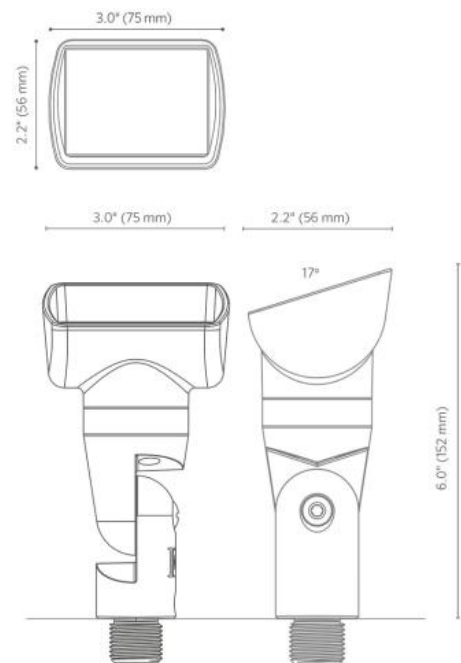

VW-31 Vantage Petite Wall Wash SPECIFICATIONS

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Die-cast A380 aluminum housing and shield with stainless steel hardware. Die-cast zinc/aluminum alloy knuckle.

LED

MR-11 LED

Optics

Ultra-wide batwing diffusion

Threads

½"-14 NPSM

Adjustability

Compress-and-lock features prevent slip after installation. Offers 9° increments of adjustability over 220° of vertical alignment.

Finish

Two-layer protection of marine-grade anodization and polyester TGIC powder-coat finish, providing superior outdoor weathering in all conditions. Tested to ASTM standards.

Hardware

Stainless steel angle lock screw. Includes 10" (254 mm) ABS slotted installation spike.

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length

Sockets

MR-11 GU4 socket with retaining clips. Ceramic socket base with heat-resistant contact pad. Stainless steel retaining clips ensure high spring force retention.

Glare Control

15° angled shield

Weight

1.3 lb (0.6 kg)

Lens

Frosted borosilicate glass

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Input Voltage

10 to 15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Sustainability Installation Requirements

Designed for installation in the upward direction only

Control

Though not included, the Luxor™ Low-Voltage CUBE (LCM-LV) can be used as a ZD option that uses Luxor Technology to zone light fixtures in up to 250 groups and dim each group in 1% increments between 0 and 100%. An installed Luxor Controller is required to perform these actions.

Manufacturing

9001:2015 ISO certified facility

Warranty

10-year limited warranty on fixture; 3-year limited warranty on LED lamp

Listings



VW-31 Vantage Petite Wall Wash ORDERING INFORMATION

Fixture	Lamp	Finish
VW-31	NL No Lamp	BZ Bronze Metallic
	ECO20WFL LED 4W (6.2 VA)	FB Black
	ECO20SFL LED 2 W, Soft 3,000K, Flood	DG Desert Granite
		WI Weathered Iron
		SB Sedona Brown
		FW Flat White
		SV Silver



EXAMPLE FIXTURE CONFIGURATION: VW-31-XX-XXXX-XX

MOUNTING OPTIONS: Specify Separately

Mounts	Catalog No.		Mounts	Catalog No.	
Long Slot Spike	250015840000		Three-Prong Spike	250020020000	
Lock Ring	250030410000SP		Super Slot Spike	753900	
Gutter Mount	GM-SS		Ground Mount with 1/2" Thread	GM-XX*	
Mini J-Box for 1/2" Thread	MJB-050-XX*		ProAim® Ratcheting Spike	PARS	
Post Mount	PM-XX*		Super J-Box Spike	SJ-XX*	
TreeBox® Mount with 1/2" Thread	TB-XX*		VersaBox® Mount with 1/2" Thread	VB-050-XX*	
Variable Height Riser for Up Lights	VHR-UL				

POWER OPTIONS: Specify Separately

Power	Catalog No.		Power	Catalog No.	
Luxor Cube - Low voltage	LCM-LV		Plug-In Transformer, 6 W	MT-6W	
Step-Down Transformer, UV (120/277 V to 12 V)	ST-UV		Lighting Fixture Surge Module	SURGE-MOD	