


## 8-Outlet Vertical Power Strip, 120V, 15A, 15 ft. (4.57 m) Cord, 5-15P, 24 in.

MODEL NUMBER: **PS2408**

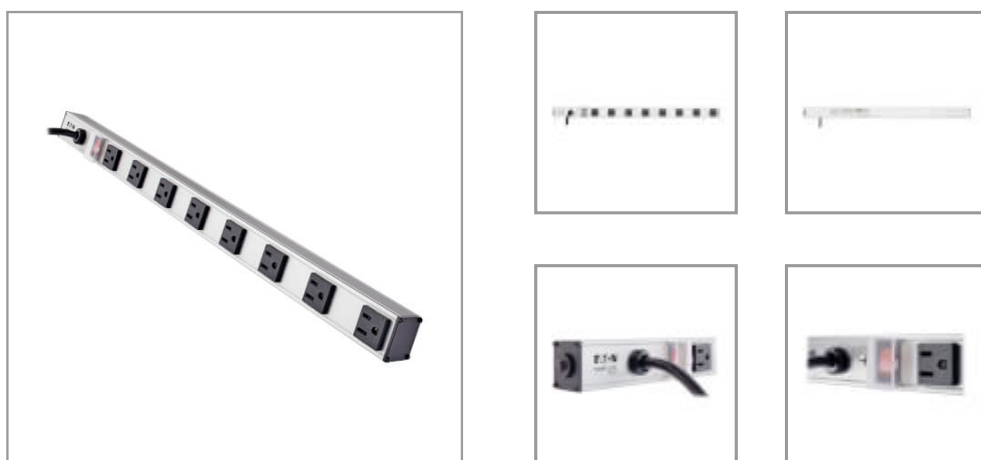

The PS2408 power strip provides horizontal or vertical power distribution for rackmount, raceway and workbench applications in a convenient 24-inch mountable housing.

### Description

The PS2408 provides a 15-amp, 120v power strip with 8 standard NEMA 5-15 outlets in a rugged, all-metal, mountable housing. It allows for both vertical and horizontal mounting, making it ideal for a variety of uses including office, rackmount, workbench, industrial and telecom applications. With a NEMA 5-15P, 15-ft. (4.57 m) power cord, you don't have to install the PS2408 next to outlets you already have; it can be mounted across the room and deliver reliable service where you need it most. A lighted and covered On/Off switch helps prevent accidental shut-offs, while a 15-amp circuit breaker guards against dangerous circuit overloads. Its sturdy all-metal extruded aluminum housing stands up to demanding network, laboratory or factory environments.

### Features

**Multi-Outlet Power Distribution**

**Vertical or Horizontal Moun**

**Extra Long Power Cord**

**Premium Safety Features**

**Heavy-Duty Housing**

### Highlights

- Ideal for applications needing multiple convenience outlets for powering a variety of electronic equipment
- 24-in mountable housing with 8 standard NEMA 5-15R outlets and a 15-ft. (4.57 m) power cord
- Lighted, covered On/Off switch and 15-amp circuit breaker
- Sturdy construction and heavy-duty, all-metal housing

### Package Includes

- PS2408
- Mounting hardware
- Instruction manual

## Specifications

| OVERVIEW |              |
|----------|--------------|
| UPC Code | 037332011442 |
| INPUT    |              |



Powering Business Worldwide

TRIPP LITE  
SERIES

|                                              |                                                                                                           |
|----------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Nominal Input Voltage(s) Supported           | 120V AC                                                                                                   |
| Recommended Electrical Service               | 15A 120V                                                                                                  |
| Input Cord Gauge Type                        | 14 gauge; SJT                                                                                             |
| Voltage Compatibility (VAC)                  | 120                                                                                                       |
| Input Plug Type                              | NEMA 5-15P                                                                                                |
| Input Cord Length (ft.)                      | 15                                                                                                        |
| Right-Angle Plug                             | No                                                                                                        |
| Input Cord Length (m)                        | 4.57                                                                                                      |
| Integrated Cord Clip                         | No                                                                                                        |
| <b>OUTPUT</b>                                |                                                                                                           |
| Frequency Compatibility                      | 50 / 60 Hz                                                                                                |
| Output (Watts)                               | 1800                                                                                                      |
| Output Receptacles                           | (8) 5-15R                                                                                                 |
| Circuit Breaker (amps)                       | 15                                                                                                        |
| Transformer Accommodation                    | (4) Yes                                                                                                   |
| Right-Angle Outlets                          | No                                                                                                        |
| Outlet Spacing                               | 2.48 in.                                                                                                  |
| <b>USER INTERFACE, ALERTS &amp; CONTROLS</b> |                                                                                                           |
| Switches                                     | Lighted 2 position switch controls power to all outlets                                                   |
| Locking Switch Cover                         | Transparent on/off switch cover prevents accidental turn-off                                              |
| <b>PHYSICAL</b>                              |                                                                                                           |
| Color                                        | Silver                                                                                                    |
| Material of Construction                     | Aluminum                                                                                                  |
| Power Cord Color                             | Black                                                                                                     |
| Form Factors Supported                       | Supports vertical or horizontal mounting in rack enclosures, raceways and a variety of other applications |
| Housing Color                                | Silver                                                                                                    |
| Mounting Holes or Slots                      | No                                                                                                        |
| Outlets Measurement (Center to Center)       | 2.48 in.                                                                                                  |
| Receptacle Color                             | Black                                                                                                     |
| Shipping Dimensions (hwd / in.)              | 27.76 x 2.40 x 4.61                                                                                       |
| Shipping Dimensions (hwd / cm)               | 70.51 x 6.10 x 11.71                                                                                      |
| Shipping Weight (lbs.)                       | 3.25                                                                                                      |
| Shipping Weight (kg)                         | 1.47                                                                                                      |
| Unit Dimensions (hwd / in.)                  | 0.000 x 0.000 x 0.000                                                                                     |



Powering Business Worldwide

TRIPP LITE  
SERIES

|                                      |                                |
|--------------------------------------|--------------------------------|
| Unit Dimensions (hwd / cm)           | 61 x 3.8 x 3.8                 |
| Unit Weight (lbs.)                   | 3.2                            |
| Unit Weight (kg)                     | 1.45                           |
| Outlet Spacing                       | 2.48 in.                       |
| Mounting Details                     | Includes mounting clips        |
| <b>FEATURES &amp; SPECIFICATIONS</b> |                                |
| Antimicrobial                        | No                             |
| Built-In Circuit Breaker             | Yes                            |
| <b>STANDARDS &amp; COMPLIANCE</b>    |                                |
| Product Certifications               | cUL Listed; UL 1363; UL Listed |
| Product Compliance                   | RoHS                           |
| <b>WARRANTY &amp; SUPPORT</b>        |                                |
| Product Warranty Period (Worldwide)  | Lifetime limited warranty      |

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.