Product data sheet

Specifications



APC Smart-UPS X, Line Interactive, 3kVA, Rack/tower convertible 4U, 208V-230V, 8x C13+2x C19 IEC, SmartSlot, Extended runtime, Short depth

SMX3000HV

Overview

Presentation	Intelligent and efficient network power protection from entry level to scalable runtime. Ideal UPS for servers, point-of-sale, routers, switches, hubs and other network devices.
Lead time	Usually in Stock

Main

Product or Component Type	Uninterruptible power supply (UPS)

Complementary

Communication port type	SmartSlot

Batteries & Runtime

Run Time	View Runtime Graph
Efficiency	View Efficiency Graph
Battery Type	Lead-Acid battery
Extendable Run Time	1
Included Battery Modules	0
Battery Slots Empty	0
Typical recharge time	3 h
RBC Quantity	1
Battery life	3…5 year(s)
Replacement battery	APCRBC143
Battery Charge Power (Watts)	245 W rated

General

Provided equipment	CD with software Documentation CD Smart UPS signalling RS-232 cable User Manual USB cable Rack Mounting brackets
Number of power module	0
Number of power module filled slots	0
Number of power module free slots	0

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

product web sub-family	Extended run
Redundant	No

Physical

Number of rack unit	4U
Cable length	6 ft (1.8 m)
Number of cables	1
color	Black
Height	17.01 in (43.2 cm)
Width	7.01 in (17.8 cm)
Depth	19.02 in (48.3 cm)
Product Weight	85.19 lb(US) (38.64 kg)
Mounting Location	Front
Mounting preference	Lower
Mounting Mode	Rack-mounted
Two post mountable	1
USB compatible	Yes

Input

Main Input Voltage	208 V 230 V
Other Input Voltage	220 V 240 V
Input Connection Type	IEC 320 C20 Schuko CEE 7 / EU1-16P BS1363A British
Efficiency at full load	140...280 V
Input Frequency	50/60 Hz +/- 3 Hz auto-sensing

Output

Main Output Voltage	230 V
Other Output Voltage	208 V 220 V 240 V
Kw Rating	2700 W
Rated power in VA	3000 VA
output connection type	8 IEC 320 C13 2 IEC Jumpers 2 IEC 320 C19
Crest factor	3 : 1
Harmonic distortion	Less than 5%
Maximum configurable power in VA	3000 VA
Max Configurable Power (Watts)	2700 W
Transfer Time	6ms typical : 10ms maximum
Topology	Line Interactive

Waveform Type	Sine wave
Output frequency	50/60 Hz +/- 3 Hz sync to mains

Conformance

Product Certifications	CE EAC IRAM RCM TISI VDE UK PSTI
Standards	EN/IEC 62040-1:2019/A11:2021 EN/IEC 62040-2:2006/AC:2006 EN/IEC 62040-2:2018

Environmental

Acoustic level	55 dBA
Online Thermal Dissipation	184 Btu/h
Operating altitude	0...10000 ft
Ambient air temperature for operation	32…104 °F (0…40 °C)
Ambient Air Temperature for Storage	5…113 °F (-15…45 °C)
Storage altitude	0…50000 ft (0.0000000000…15240.0000000000 m)
Relative Humidity	0…95 %
Storage Relative Humidity	0…95 %

Communications & Management

control panel	Multi-function LCD status and control console
Emergency Power Off (EPO)	Yes
Free slots	1
Control panel	LED status display with on line : on battery : replace battery and overload indicators
Alarm	Alarm when on battery : distinctive low battery alarm : configurable delays

Surge Protection and Filtering

Surge energy rating	645 J
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : m

Ordering and shipping details

GTIN	731304292616
Country of origin	PH

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	12.99 in (33.000 cm)
Package 1 Width	23.43 in (59.500 cm)
Package 1 Length	25.39 in (64.500 cm)

Package 1 Weight	105.006 lb(US) (47.630 kg)
Unit Type of Package 2	P12
Number of Units in Package 2	6
Package 2 Height	44.88 in (114.000 cm)
Package 2 Width	31.50 in (80.000 cm)
Package 2 Length	47.24 in (120.000 cm)
Package 2 Weight	656.493 lb(US) (297.780 kg)
Pallet unit layers	2
Pallet layers	4

Contractual warranty

Warranty	3 years repair or replace (excluding battery) and 2 years for battery, optional on-site warranties available, optional extended warranties available

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	2448
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
SCIP Number	5ee38369-4dfb-4636-ab65-b08aa3242891
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Energy efficiency

Optimized Energy Efficiency	Energy efficient product


Use Again

Repack and remanufacture

Circularity Profile	End of Life Information
Removable battery	User replaceable
Take-back	Yes

Image of product / Alternate images

Alternative

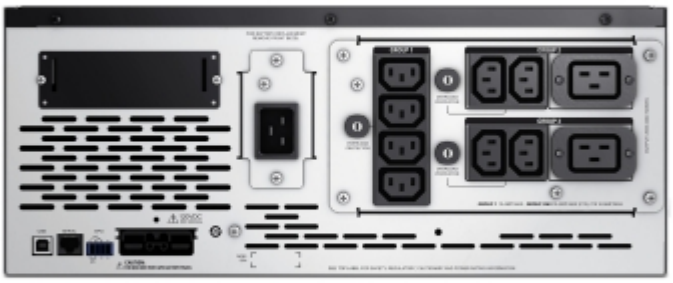




APC
APC


APC
APC


APC
APC




APC


APC