

Fire-Rated Poke-Throughs  
Pedestal Service Fittings  
4-Gang



Features

- 1–4 hour fire rating  
(1–3 hour for steel floor units and concrete topping, D900 Series Design)
- For 2 1/4 in. to 7 in. floor thickness
- Approved for use in the City of Chicago

Ordering Information

| Description                                                                      | Color | UPC          | Catalog Number |
|----------------------------------------------------------------------------------|-------|--------------|----------------|
| 4-Gang Service Fitting,<br>Order one plate per gang,<br>Use with PT27A or PT7XC. | Black | 783585396194 | FR480BKA       |

Listings



UL Listed  
CSA Certified

Specifications

|                   |                                                                          |
|-------------------|--------------------------------------------------------------------------|
| Material          | Heavy gauge galvanized steel frame with aluminum housing and face plates |
| Mounting Hardware | Included                                                                 |

Related Product

|                                          |             |
|------------------------------------------|-------------|
| Pedestal Face Plate, 1" KO, Black        | SS2309F1BKA |
| Pedestal Face Plate, Bushed 1" KO, Black | SS2309TBKA  |
| Pedestal Face Plate, Blank, Black        | SS2309BBKA  |
| Pedestal Face Plate, Duplex, Black       | SS2309DBKA  |
| Pedestal Face Plate, 3/4" KO, Black      | SS2309FBKA  |
| Pedestal Face Plate, 1" KO, Black        | SS2309F1BKA |

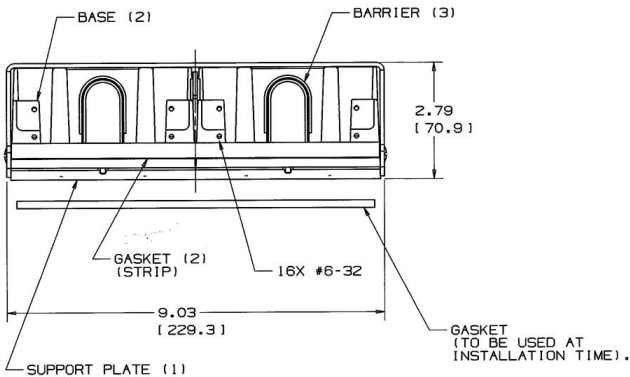

TO BE USED AT  
INSTALLATION TIME.

Links

[Sales Drawings](#)  
[ecatalog](#)  
[Media](#)

