
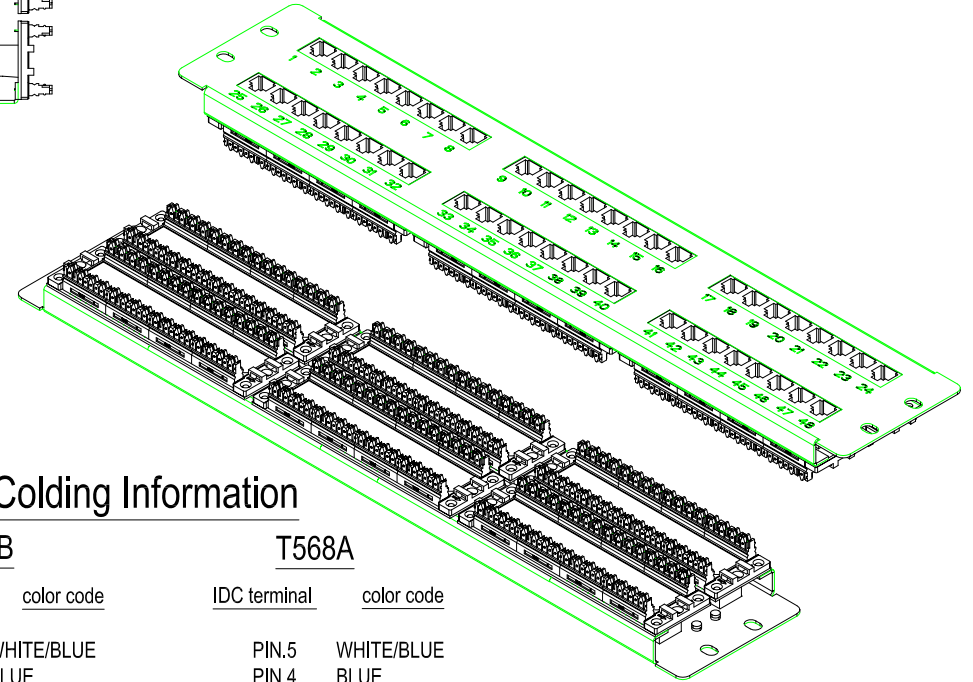


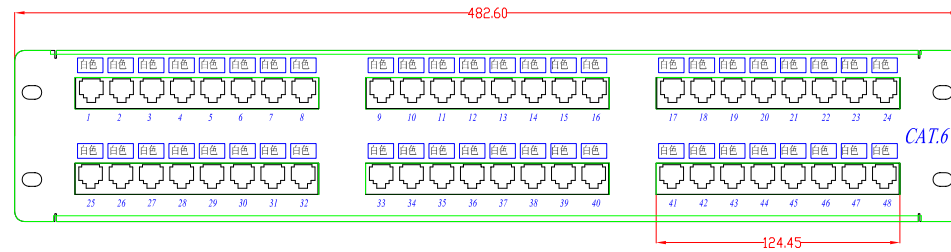


DATE	REV.	REVISION	DRAFTING	CHECKED
06/09/19	A/0	NEW	湯欣之	

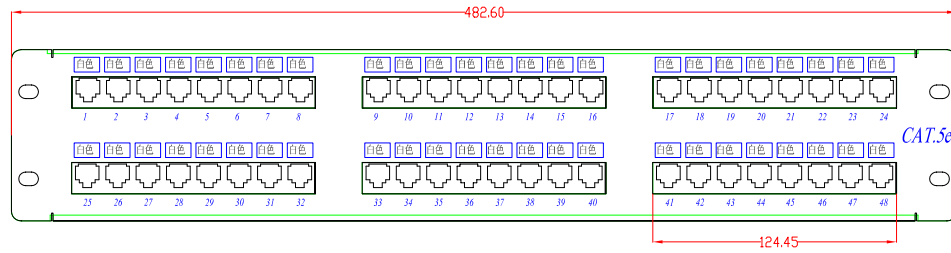

Specification

- Patch Panel: Case, metal 2U.
- RJ45 Jack---Body: PC UL94V-0 rated. Black color.
Contact: Phosphor Bronze, 50u" gold plated over Nickel plated in contact area
Tin-lead over nickle in solder area.
- Connector: 110 Connector---Body: PC UL94V-0, White color.
Contact: Phosphor Bronze with Tin plated.
- P.C.Board: FR4,1.6m/m Double side,UL 94V-O.
- Operation Temperature : 0°Cto80°C.
- Insertion Force: 900gms for 8 contacts.
- Retention Strength : 7.7 kgs between jack and plug.
- Durability : 750 Cycles contact resistance test check every 100 Cycles.
Insertion cycles at 20 cycles/minute max.
- Certifications: ETL verify ;UL listed ; ANSI/TIA/EIA-568-B.2; ISO/IEC 11801 ClassE;FCC.

Color Colding Information

T568B		T568A	
IDC terminal	color code	IDC terminal	color code
PIN.5	WHITE/BLUE	PIN.5	WHITE/BLUE
PIN.4	BLUE	PIN.4	BLUE
PIN.1	WHITE/ORANGE	PIN.1	WHITE/GREEN
PIN.2	ORANGE	PIN.2	GREEN
PIN.3	WHITE/GREEN	PIN.3	WHITE/ORANGE
PIN.6	GREEN	PIN.6	ORANGE
PIN.7	WHITE/BROWN	PIN.7	WHITE/BROWN
PIN.8	BROWN	PIN.8	BROWN

Unless specified on the drawing, tolerances are per the follows:

- . ±1
- .X ±0.2
- .XX ±0.05



DRAW.NO	DESC.	C5e/cat.6 UTP patch panel 8~48port(110)		
DEPARTMENT	DRAW	DATE	2006.09.19	
SCALE	1:1	APPROVED	DATE	
UNIT	mm	SHEET	1 OF 1	

Material	Part Number	C5E-48 or C6-48	Note	3RD	
----------	-------------	-----------------	------	-----	--