


RIB® DC POWER SUPPLIES

- Outputs from 300 mA - 2.5 Amp
- 120 Vac or 24 Vac power input
- 1.5 - 28 Vdc adjustable output
- Isolated or non-isolated
- Available enclosed or track mount
- Mounting track provided
- UL Listed models

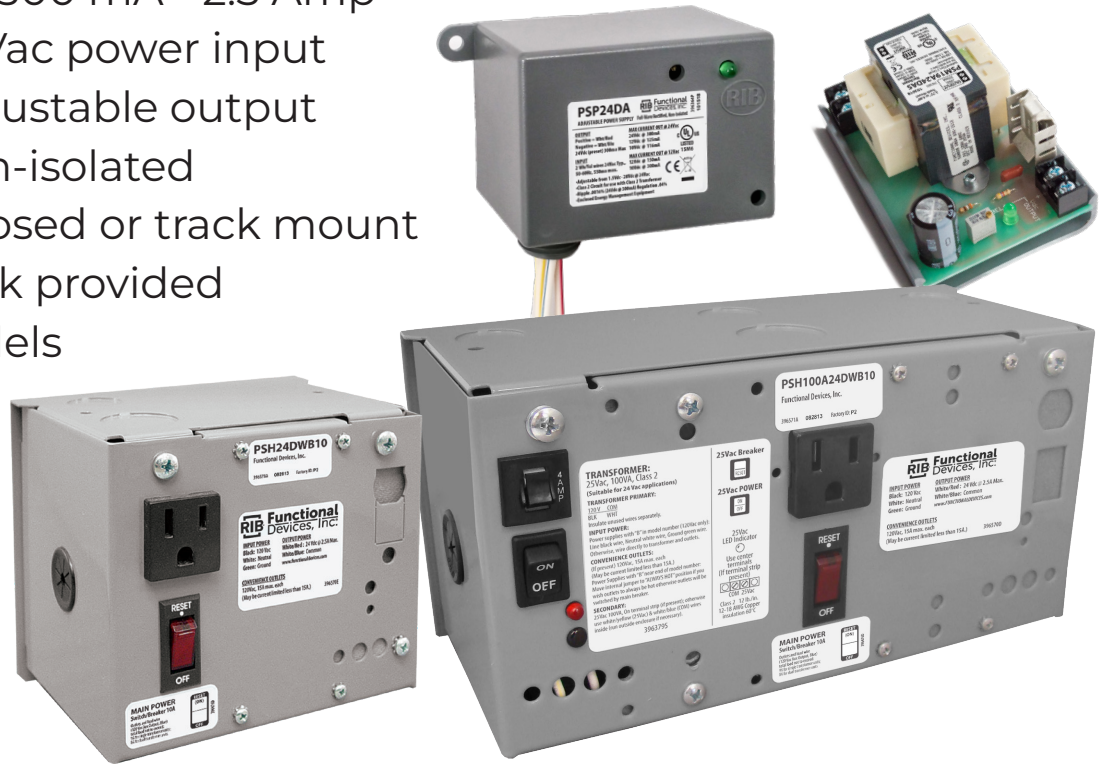

PRODUCT SELECTION GUIDE

See FunctionalDevices.com For Full Details

MODEL #	UL	VOLTAGE INPUT	VOLTAGE OUTPUT	OUTPUT CURRENT	ON/OFF SWITCH	HEIGHT	WIDTH	DEPTH	HOUSING STYLE / TRACK MOUNT
PSP24DA	•	24 Vac	Adjustable 1.5-28 Vdc ; Non-Isolated	300 mA		2.390"	3.310"	1.810"	Enclosed
PSH24DWB10		120 Vac	Fixed 24 Vdc ; Isolated	2.5 Amp	•	4.500"	5.438"	4.500"	Enclosed
PSH100A24DWB10		120 Vac	Fixed 24 Vdc ; Isolated 100 VA, 24 Vac	2.5 Amp	•	4.500"	8.625"	4.500"	Enclosed
PSMN24DA	•	24 Vac	Adjustable 1.5-28 Vdc ; Non-Isolated	300 mA		1.750"	2.750"	1.750"	MT212-2 included
PSMN24DAS	•	24 Vac	Adjustable 1.5-28 Vdc ; Non-Isolated	300 mA	•	1.750"	2.750"	1.750"	MT212-2 included
PSM20A12DAS	•	24 Vac	Adjustable 1.5-14 Vdc ; Isolated	300 mA	•	2.750"	4.000"	2.250"	MT212-4 included
PSM24A24DAS	•	24 Vac	Adjustable 1.5-28 Vdc ; Isolated	300 mA	•	2.750"	4.000"	2.250"	MT212-4 included
PSM19A24DAS	•	120 Vac	Adjustable 1.5-28 Vdc ; Isolated	300 mA	•	2.750"	4.000"	2.250"	MT212-4 included
PSMN40A24DS	•	120 Vac	Fixed 24 Vdc ; Isolated	1 Amp	•	5.000"	2.750"	2.500"	MT212-6 included
PSH100AB10-DC	•	120 Vac	Fixed 24 Vdc ; Isolated	2.5 Amp	•	4.500"	5.438"	4.500"	Enclosed
PSH100A100AB10-DC	•	120 Vac	Fixed 24 Vdc ; Isolated ; 100 VA, 24 Vac	2.5 Amp	•	4.500"	8.625"	4.500"	Enclosed

UL = Class 2 (UL Approved UL5085-3) : UL916 Energy Management USA & Canada