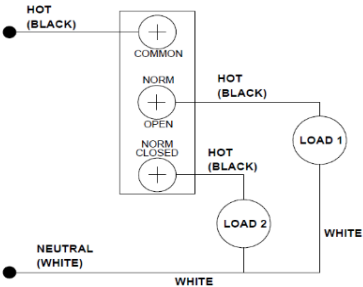


Microswitch Specifications		
Cat.	Rating (A)	Terminal Screw Torque
16RSW	15A	4 in-lbs.
 The diagram illustrates the wiring for a Microswitch 16RSW. It features three terminals: COMMON, NORM OPEN, and NORM CLOSED. A HOT (BLACK) line is connected to the COMMON terminal. The NORM OPEN terminal is connected to a HOT (BLACK) line that passes through LOAD 1 before reaching a WHITE line. The NORM CLOSED terminal is connected to a HOT (BLACK) line that passes through LOAD 2 before reaching a WHITE line. A NEUTRAL (WHITE) line is also shown at the bottom left.		
NOTE: User can have two independent loads on the Microswitch connected at the same time but different functions (either NO or NC). However, only one load will be active at a given time		