


## Sharp MultiSync® P556 LCD 55" Professional Large Format Display

### Preliminary Datasheet

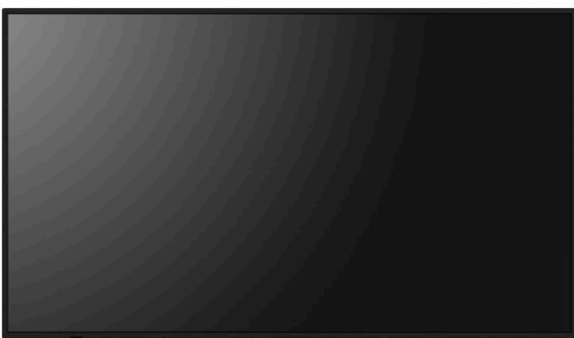

#### **When imaging precision cannot be compromised**

When imaging precision and 24/7 operational reliability cannot be compromised, the 6th generation of MultiSync® P series presents best-in-class performance with an advanced feature set for mission-critical applications

Unparalleled clarity of detail and colour accuracy is achieved with 8K signal processing, wide colour gamut and the integrated SpectraView® engine controlling all visual parameters. Even in bright ambient light conditions, high brightness levels of 700 cd/m<sup>2</sup> combined with a high haze filter guarantees exceptional readability with no annoying reflections. Despite its slim, elegant profile, the quality build is robust for use in public spaces, with an all-metal chassis for fire-retardancy. Featuring slot-in technology, choose scalable computing power with Raspberry Pi Compute Module or the more powerful Intel® Smart Display Modules (Intel®SDM) for tailor-made signage solutions.

For best visualisation in control rooms and production lines, for passenger information and wayfinding signage; the Sharp P Series is trusted for safety and long-life, fit-for-purpose performance.

#### **Benefits**

**Secure remote management** – control your devices remotely and securely using NEC NaviSet Administrator 2; proactively manage maintenance requirements saving time and resources

**Unhindered readability** – no reflections from windows or other light sources means no disruption to

the visibility of signage content or meeting room presentation

**Safe for public environments** – a metal back cover and intelligent heat management ensure safe use in public spaces where fire-retardancy is mandatory

**Enhanced imaging performance** – advanced settings of all relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the SpectraView Engine for precise, natural images.

**Mission-critical 24/7 ready operation** – the meticulous selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.

## Product Information

Product Name	Sharp MultiSync® P556
Model	PN-P556
Product Group	LCD 55" Professional Large Format Display
Order Code	60005916

## Display

Panel Technology	IPS with Edge LED backlights
Active Screen Area (W x H) [mm]	1,209.6 x 680.4
Screen Size [inch/cm]	54.6 / 138.8
Aspect Ratio	16:9
Pixel Pitch [mm]	0.315
Brightness [cd/m <sup>2</sup> ]	700
Contrast Ratio	≥ 8000:1 <sup>1</sup>
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1.073 (10bit)
Colour Gamut	86% of DCI
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	Pro (25)
Supported Orientation	Face Down; Face Up <sup>2</sup> ; Landscape; Portrait

## Resolution

Native Resolution	3840 x 2160			
Supported Resolutions	1024 x 768;	1366 x 768;	1920 x 1200;	720 x 400;
	1270 x 720;	1400 x 1050;	1920 x 1200;	720 x 480;
	1280 x 1024;	1440 x 900;	1920 x 2160;	720 x 576;
	1280 x 720;	1600 x 1200;	3840 x 2160;	800 x 600
	1280 x 800;	1680 x 1050;	4096 x 2160;	
	1360 x 768;	1920 x 1080;	640 x 480;	

## Synchronisation Rate

Horizontal Frequency [kHz]	15 - 135
Vertical Frequency [Hz]	23 - 76

## Connectivity

Input Video Digital	1 x DisplayPort (with HDCP); 1 x USB-C (with HDCP, 65 W); 2 x HDMI (with HDCP)
Input Audio Digital	1 x DisplayPort; 1x USB-C; 2 x HDMI
Input Control	1 x RS232; 2 x LAN 100Mbit; remote control wire (3,5mm jack)
Input Data	1 x USB Type-A (Downstream); 1 x USB Type-A (Service); 1 x USB Type-C (Downstream)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, USB-C); 1 x HDMI (loop through: HDMI, SDM slot-in PC)
Output Audio Analogue	1 x 3,5 mm jack
Output Audio Digital	1x HDMI
Output Control	1 x LAN 100Mbit
Input Detect	Custom; First; Last
PiP/PbP	Dual-Split; scalable picture size

## Calibration

Factory Calibration	Gamma; Intensity; RGB; Uniformity; White Point
Sensor Calibration (through USB)	PC-less Calibration with USB Sensor MDSVSensor3; White Copy (post self-calibration)
Calibration with Software	Corner Uniformity; Gamma; Intensity; RGB; Update Factory Calibration; White Point
Calibration Software	Display Wall Calibrator

## Open Modular Intelligence

Intel® SDM	accepts Intel® Smart Display Modules Large and Small up to 66 W
Compute Module Slot	RPi Compute Module 4

## Sensors

Ambient Light Sensor	optional via Eco Sensor (KTES1)
Human Sensor	optional via Eco Sensor (KTES1)
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable

## Electrical

Power Consumption [W]	115 shipping
Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)
Power Management	VESA DPMS
Power Supply	100-240 V AC; 50/60 Hz; internal

## Environmental Conditions

Operating Temperature [°C]	+0 to +40
----------------------------	-----------

Operating Humidity [%]	20 to 80
------------------------	----------

Storage Humidity [%]	10 to 80
----------------------	----------

Storage Temperature [°C]	-20 to 60
--------------------------	-----------

## Mechanical

Dimensions (W x H x D) [mm]	1,235.6 x 709.3 x 59.5
-----------------------------	------------------------

Weight [kg]	20.5
-------------	------

Bezel Width [mm]	11 (left, right and top); 13.9 (bottom)
------------------	-----------------------------------------

VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
--------------------	-------------------------------

Ingress Protection	IP5x (front); IP2x (back)
--------------------	---------------------------

Packaging Dimensions (W x H x D) [mm]	1,390 x 850 x 160
---------------------------------------	-------------------

Packaging Weight [kg]	27
-----------------------	----

Material	Metal
----------	-------

## Available Options

Accessories	Eco Sensor (KTES1); Feet (ST-43M); Remote control kit (KTRC3); Soundbar (PN-ZCMS1); Speaker (SP-RM3a); Trolley (PD04 Tipster, L20PNSR780MEU); USB-C cable (USB-C 5M, USB-C 7M); Wall mount (PDW S 32-65 L, PDW S 32-65 P, L20PNWALL90EU, PDW T XL-2)
-------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## Regulatory

Safety and Ergonomics	CE; EMC Class B; Energy Star 8; FCC Class B; REACH; RoHS; UKCA; UL/C-UL or CSA
-----------------------	--------------------------------------------------------------------------------

Pixel Failure Class	ISO 9241-307, Class 1
---------------------	-----------------------

Resistance to Fire	Metal backcover, plastic material certified acc. to UL94-5VB
--------------------	--------------------------------------------------------------

## Green Features

Energy Efficiency	ECOMode; Energy consumption: (TBD) kWh/(TBD) h; Energy efficiency class: (TBD); LED backlight
-------------------	-----------------------------------------------------------------------------------------------

Ecological Standards	EnergyStar 8.0
----------------------	----------------

## 3rd Party Certifications

Crestron	Certified for Crestron CCV2 and XiO Cloud
----------	-------------------------------------------

## Additional Features

Special Characteristics	CEC Support; Clone Settings; DICOM Simulation; HDMI ARC; Scheduler
Colour Versions	Black Front Bezel, Black Back Cabinet
Audio	Integrated Speakers (10 W + 10 W)
Shipping Content	2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension <sup>3</sup>
Operating Hours	24/7
External Control	AMX NetLinx Support; Crestron V2; HDMI CEC; HTTP Browser; PJLink; Scheduled Timer; SNMP
Remote Management	NaViSet Administrator 2
Security	Disable HW Buttons; Disable IR Functionality; Emergency Notification; IEEE802.1X (LAN)

<sup>1</sup> out of the box conditions, local dimming ON

<sup>2</sup> adjusted usage conditions for face up/down installations, please refer to operational guidelines or contact our support

<sup>3</sup> please refer to terms and conditions of warranty extensions



RoHS



FCC Class B



CE

This document is © 2025 Sharp NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 05.06.2025