

Product data sheet

Specifications



APC NetShelter Rack PDU Advanced, Switched Metered Outlet, 3Phase, 22.1kW 400V 32A or 17.3kW 415V 30A, 48 Outlets, IEC309

APDU10350SM

⚠ To be discontinued

⚠ To be discontinued on: Sep 3, 2025

Overview

Lead time	Usually in Stock
-----------	------------------

Main

Color	Black
Product or Component Type	PDU
PDU Type	Switched metered outlet
Cord length	5.9 ft (1.8 m)

Complementary

Input Voltage	415 V 3 phase 400 V 3 phase
Height	70.08 in (178.0 cm)
Width	2.20 in (5.6 cm)
Output Voltage	240 V
Depth	2.95 in (7.5 cm)
Product Weight	21.2 lb(US) (9.6 kg)
Mounting Location	Side
Mounting preference	No preference
Input Plug Type	IEC 60309 30 A 3P+N+PE
Mounting Mode	Rack-mounted
Rack units	0U
Mounting position	Vertical
Communication Port Protocol	1000BASE-T 10/100BASE-T
Line Rated Current	24 A
Acceptable Input Voltage	200...240 V 346...415 V
Input current limits	30 A
Load Capacity	17300 VA
Input Frequency	50/60 Hz

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Outlet type and quantity	24 C13/C15/C19/C21 24C13/C15
--------------------------	---------------------------------

Environment

Product Certifications	UKCA TAA compliance BAA compliance
Standards	UL 62368-1 CSA C22.2 No 62368-1 FCC part 15 Subpart B CE EN 62368-1
IP Degree of Protection	IP44
Ambient air temperature for operation	23...140 °F (-5...60 °C)
Relative Humidity	5...95 %
Operating altitude	0...10000 ft
Ambient Air Temperature for Storage	-13...149 °F (-25...65 °C)
Storage Relative Humidity	5...95 %
Storage altitude	0...50000 ft (0.0000000000...15240.0000000000 m)

Ordering and shipping details

GTIN	731304439745
------	--------------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	77.95 in (198 cm)
Package 1 Width	5.20 in (13.2 cm)
Package 1 Length	10.31 in (26.2 cm)
Package 1 Weight	27.8 lb(US) (12.6 kg)

Contractual warranty

Warranty	3 years repair or replace
----------	---------------------------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	16738
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration


Use Again

Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Image of product / Alternate images

Alternative

Multiple color options available

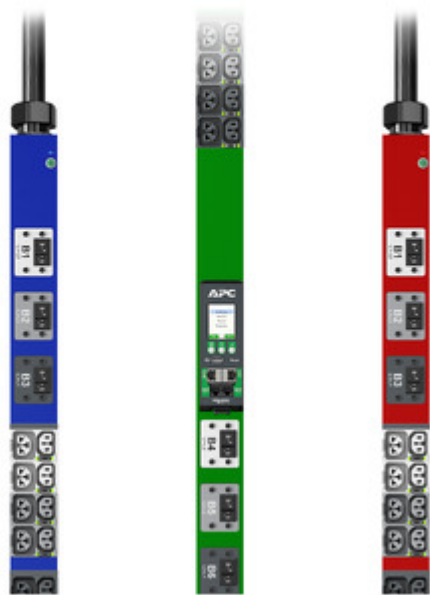

4-in-1 outlet for increased flexibility



Acts as any of these outlet types:



C13



C15



C19



C21













