


# SITESHIELD Axis Base

All-In-One Outdoor Surveillance Solution  
Deployment for **Anywhere with Power**

SS-KG1-B2A-3Y  
SS-KG1-B3A-3Y  
SS-KG1-B4A-3Y

## SiteShield Axis Base w/ 3Y Licenses Includes:

- 1x NEMA Enclosure System and Accessory with Built-in Thermostat Heater and Fan
- 1x 6 Ports POE Switch(4 POE Ports, 2 Data Ports)
- 1x 4G LTE Router with 4 Ports
- 2 x Strobe Lights
- 3Y SiteShield License include Axis Core License for All Cameras in SiteShield, SiteShield Management License(Remote Power Control, Virtual Guard Dashboard) and Warranty

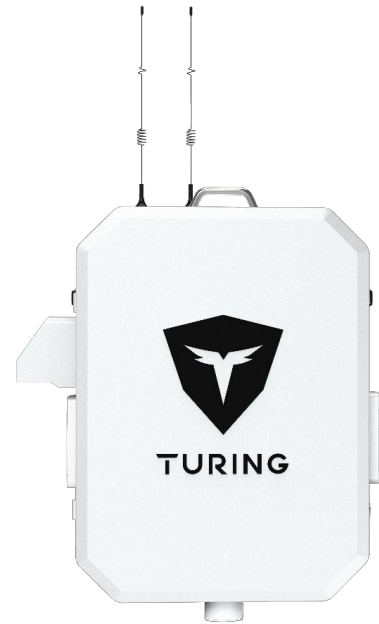

**SIM Carriers Certified by**



# SPECIFICATIONS

SS-KG1-B2A-3Y  
 SS-KG1-B3A-3Y  
 SS-KG1-B4A-3Y

GENERAL	
Dimensions (HxWxD)	23.8" x 19.1" x 10.4"(605 x 485 x 265mm)
Weight	40lbs(without camera)
Working Environment	-30~60°C (-22~140°F), Humidity ≤ 90% RH (non-condensing)
Rating	NEMA3R

POWER	
Power	AC110V Power consumption: ~64W(without camera)
Power Interface	Cable Conduit Connector

HEAT AND FAN	
Heat	Heater Capacity: 150W Heater turn on at 59°F(15°C)
Fan	MTBF: 10 years Fan turn on at 86°F(30°C)

NETWORK (CELLULAR)	
Standard and Band	LTE FDD: B1/B3/B5/B7/B8/B20/B28 B1/B2/B3/B4/B5/B7/B8/B28 (Optional), B2/B4/B5/B12/B13/B17/B66/B71 (Optional) LTE TDD: B38/B39/B40/B41 HSPA+/HSUPA/HSDPA/WCDMA/UMTS 2100 /1900/900/850MHz EV-DO: BCO CDMA 1x: BCO EDGE/GPRS/GSM 850/900/1800/1900MHz
Antenna Interface	Cellular: 2 * Standard SMA female antenna interface, characteristic impedance: 50 Ω
SIM/UM Slot	Standard drawer-type user card interface

NETWORK(POE SWITCH)	
Ports	2*10/100Base-TX RJ45 ports (Data) 4*10/100Base-TX PoE ports (Data/Power)
Max Power Per Port	30W, IEEE802.3af/at
Power Consumption	Standby:<3W, Full load:af<60W, at<120W


## MOUNT OPTIONS Pole Mount

3.9 into 11.8 in dia Stainless Steel Adjustable Clamp x4 (Included)



## MOUNT OPTIONS Wall Mount

M8 x 80  
 (Not included in Product)



## Camera MOUNT OPTIONS

### Side Mount Bracket: TA-AXSIDEBR

Bracket designed to mount Axis Camera on either the left or right side of the enclosure.  
Cameras are not included.

### TA-AXSIDEBR

Side Mount adapter for Axis Camera  
179x179x25 mm



AXIS TQ5001-E Wall-and-Pole Mount



M55

AXIS TQ1003-E Wall Mount



Q16/P13



P14



Q17/Q18



P32

The bracket comes in its own packaging and includes all necessary accessories:

- Installation manual
- Screws:
  - M4 × 14 mm (x4)
  - M5 × 14 mm (x4)
  - M8 x 25mm (x4)

Note: Brackets are included in SKUs B2A, B3A, and B4A; however, the quantity may differ depending on the specific SKU.

## Camera MOUNT OPTIONS

### Bottom Mount Bracket: TA-AXBOTMBR

Bracket designed to mount Axis Camera on bottom of the enclosure.  
Cameras are not included.

#### TA-AXBOTMBR

Bottom Mount adapter for Axis Camera  
102\*102\*35mm



The bracket comes in its own packaging and includes all necessary accessories:

- Installation manual
- Screws:
  - M4 × 14 mm (×4)
  - M5 × 14 mm (×4)

### Bottom Pipe Mount Bracket: TA-AXPTZBR

Bracket design for Axis PTZ camera or Multi-Sensor Camera  
(This Bracket is only included in B3A/4A)

#### TA-AXPTZBR

Mount adapter for Axis PTZ or multi-sensor  
65\*60\*60MM

G1 1/2



AXIS T94A01D



Q63



AXIS T94N01D



P37




The bracket comes in its own packaging and includes all necessary accessories:

- Installation manual

# 24/7 SECURITY POWERED BY AI

SS-KG1-B2A-3Y  
SS-KG1-B3A-3Y  
SS-KG1-B4A-3Y

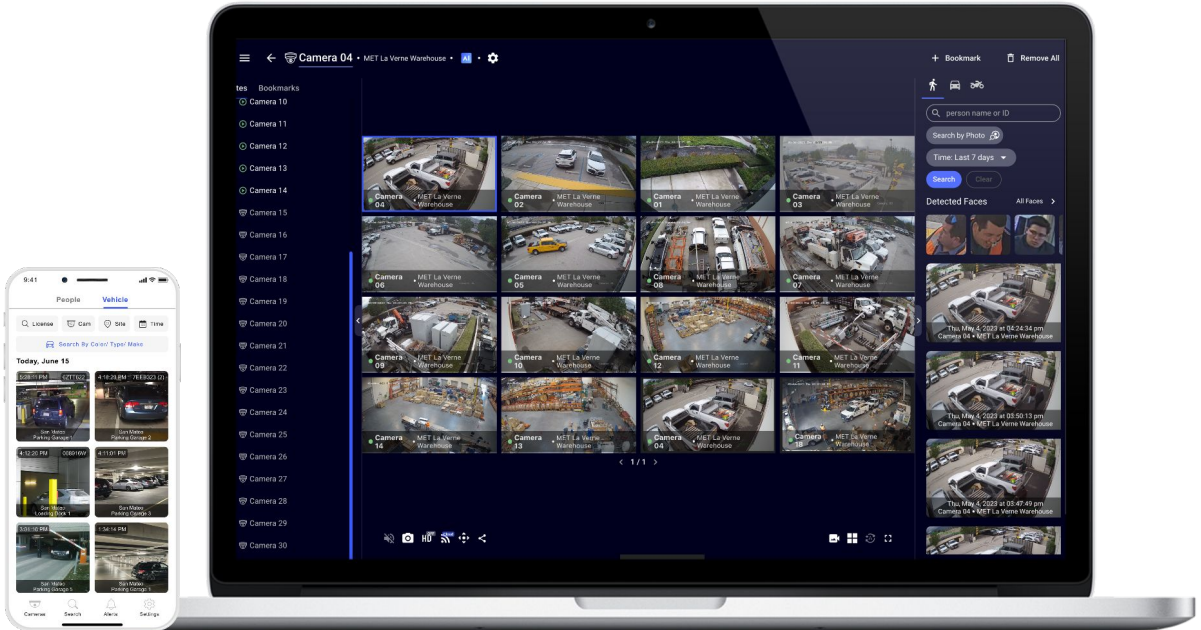

## KEY FEATURES



Receive Instant Smart Alerts for Intruders/Trespassers/Person of Interest/Vehicle of Interest via SMS/Email/Push Notifications

Remote Live Stream Monitoring



- Remote Live Streaming up to 16 Cameras in HD
- Bookmark and Auto-Cycle Play for Live Monitoring



Share Live Camera Streams With First Responders



Find Events Fast with Smart Video Search and Archive/Share for Future Reference



View Live Footage From any Desktop / Mobile Device



Flexible Hybrid Storage Locally or on the Cloud