

# EPOW-24-60

Hardened NEMA TS2 Power Supply 24V 60W



## Overview

With a wide operating temperature range of -40 to 75°C (-40 to 167°F) and built with an aluminum fanless design, EtherWAN's EPOW-24-60 is a 24V 60W hardened power supply designed to operate in the most extreme environments. The EPOW-24-60 has a 60W power budget and built in over-voltage and short-current protection, making it a perfect and reliable solution for PoE applications.

EtherWAN — "When Connectivity is Crucial."

## Highlights

### + Reliable Power Delivery

- Active built-in PFC for max power distribution efficiency
- Constant voltage across output terminal

### + Hardened-Grade for Non-Ventilated & Harsh Environments

- Wide operating temperature range -40 to 75°C (-40 to 167°F)
- Fanless operation
- IP67 total dust protection and water resistance

### + NEMA TS2

- Complies with NEMA TS1 & TS2 electrical and temperature requirements for traffic control equipment
- High impact, thermal shock, and electrical noise resistance

### + Easy Install

- AC and DC cables pre-attached
- Mounting holes to install outdoors and or in cabinets

## Hardware Specifications

### + Power

**Input**  
100-277 VAC

**Output**  
24 VDC

**Protection**  
OVP (Over Voltage Protection)  
<305 VAC  
SCP (Short Circuit Protection)

### + Physical

**Casing Material**  
Aluminum

**IP Rating**  
IP67 (Dust Tight and Waterproof)

**Dimensions**  
180 x 44 x 32mm (W x D x H)  
7.09" x 1.74" x 1.26"

**Weight**  
1.32lbs (0.6kg)

**Installation Type**  
Wall mounting

### + Environmental

**Operating Temp.**  
-40 to 75°C (-40 to 167°F)

**Storage Temp.**  
-45 to 85°C (-49 to 185°F)

**Relative Humidity**  
10% to 95% (non-condensing)

**Operation Humidity**  
20-90%

**Vibration Resistance**  
10~500HZ, 2G 10min/period  
X, Y, Z line per hour

### + Regulatory

**Standard**  
EN 61347-1  
EN 61347-2-13  
EN 62493

**EMC Emission**  
EN 55015  
EN 61000-3-2


**EMC Immunity**  
EN 55015  
EX 61000-4-2,3,4,5,6,8,11

### + Warranty

**Length**  
3 Years

**Details**  
[www.etherwan.com/support/warranty-policy](http://www.etherwan.com/support/warranty-policy)

## Dimensions

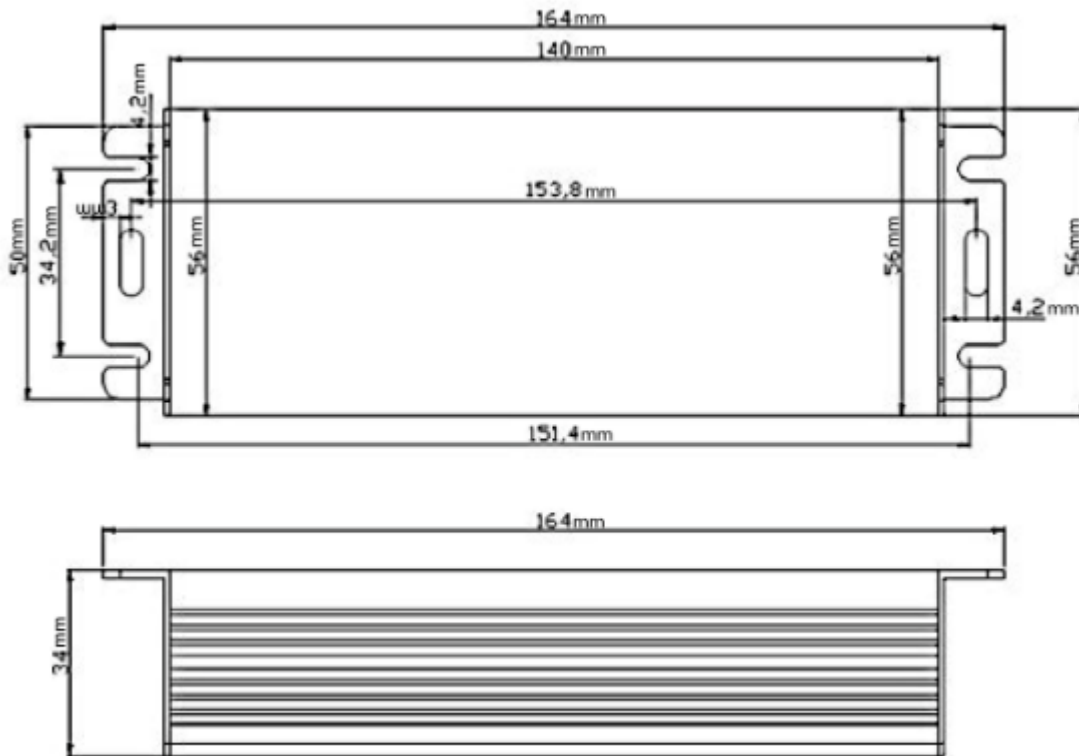

## Ordering Info

### + Model

EPOW-24-60	Power Supply, Hardened (-40°C - +75°C) External 100-277 VAC Input; NEMA-TS2 rated; 60W, 24VDC, 0-11.1A with Open Wire (US Plug)
EPOW-24-60-A	Power Supply, Hardened (-40°C - +75°C) External 100-277 VAC Input; NEMA-TS2 rated; 60W, 24VDC, 0-11.1A with 2.5mm DC Jack (US Plug)

