





WIRE TERMINATION

WWW.IDEALIND.COM • 1-800-435-0705 CUSTOMER ASSISTANCE

Vinyl Insulated Bullet Disconnect Dimensions

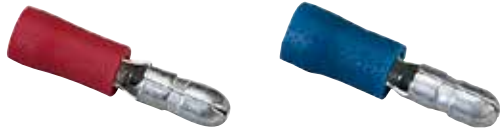

Wire Range (AWG)	Wire Range (mm ²)	Max. Wire Ins. Dia. (in.)	Max. Wire Ins. Dia. (mm)	Dimensions (in.)				Dimensions (mm)				Cat. No
				L	B	W	F	L	B	W	L	
22-18	0.5-1.0	.150	3.8	.846	.413	.157	.335	21.5	10.5	4.0	8.5	83-8001
16-14	1.5-2.5	.185	.47	.846	.413	.157	.335	21.5	10.5	4.0	8.5	83-8011

75°C/300 Volts max.

