

Adjusting SSF-02E-Cleaver

Before attempting to adjust cleaver please be sure soft peel has been removed using fingernails and fiber is long enough to lay across both black pads.



STEP 1 Remove top crosshead screw that holds trash bin.

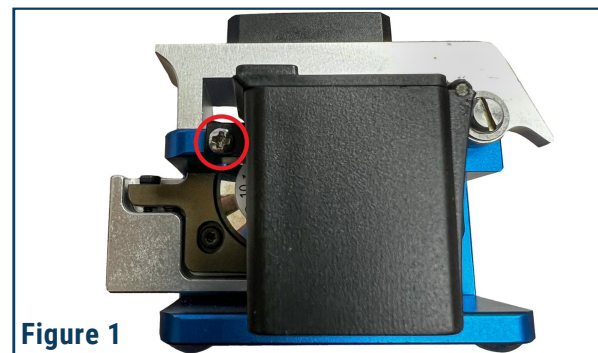


Figure 1

STEP 2 Remove bottom crosshead screw that holds trash bin.



Figure 2

STEP 3 Use allen wrench located underneath the cleaver to loosen both screws located on the side of the cleaver. Turn both 1 full turn to the left.



Figure 3

STEP 4 Locate 2 screws on top of the blade carriage sliding block and use allen wrench to remove both screws completely.

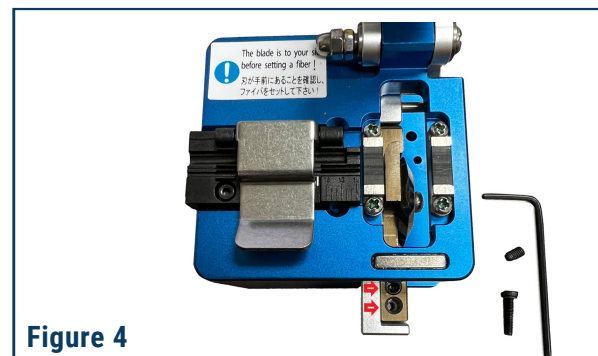


Figure 4

STEP 5 Re-install small screw on top of the blade carriage sliding block closest to the wheel & turn 7 full turns to the right.

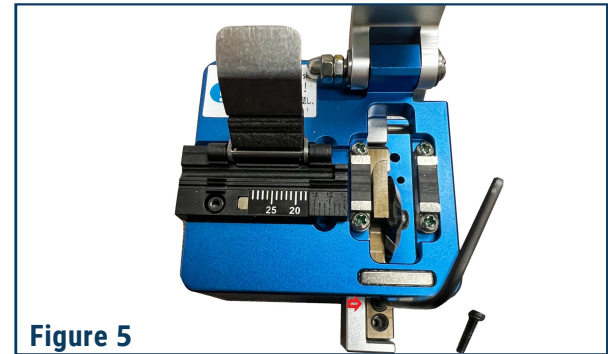


Figure 5

STEP 6 Re-install longer screw in the opening farthest from the wheel & turn to the right till tight.

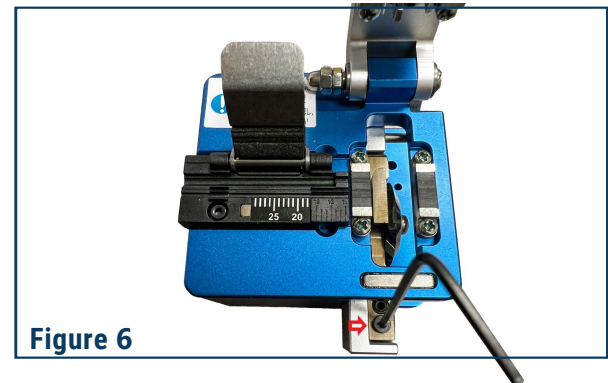


Figure 6

STEP 7 Turn both screws to the right till tight.



Figure 7

STEP 8 Try to cleave fiber 3 times.

If worked,

Add trash bin and don't over tighten the screws.

If didn't work,

Re-try steps 3-8 or send it to the address below and we will calibrate it for free.

Cleerline Technology Group
8404 El Way Drive #2B,
Missoula, MT 59808

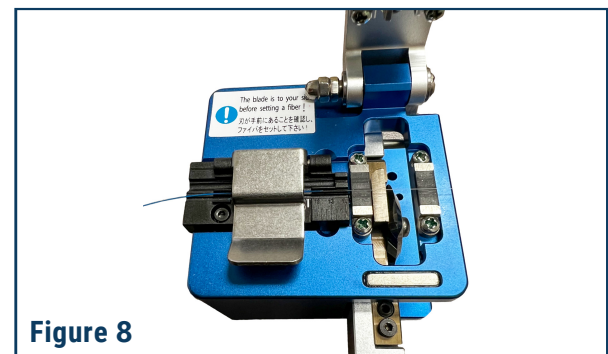


Figure 8