

Product data sheet

Specifications



APC NetShelter Rack PDU Advanced, Metered, 5.0kW, 1Phase, 208V, 30A, L6-30P, 40 Outlet

APDU10151ME

⚠ To be discontinued

⚠ To be discontinued on: Sep 3, 2025

Overview

Lead time Usually in Stock

Main

Color Black

Product or Component Type PDU

PDU Type Metered

Cord length 9.8 ft (3.0 m)

Complementary

Input Voltage 208 V 1 phase

Height 58.66 in (149.0 cm)

Width 2.20 in (5.6 cm)

Output Voltage 208 V

Depth 2.95 in (7.5 cm)

Product Weight 14.6 lb(US) (6.6 kg)

Mounting Location Side

Mounting preference No preference

Input Plug Type NEMA L6-30P

Mounting Mode Rack-mounted

Rack units 0U

Mounting position Vertical

Communication Port Protocol 1000BASE-T
10/100BASE-T

Line Rated Current 24 A

Acceptable Input Voltage 200...240 V

Input current limits 30 A

Load Capacity 4992 VA

Input Frequency 50/60 Hz

Outlet type and quantity 20 C13/C15/C19/C21
20C13/C15

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environment

Product Certifications	TAA compliance BAA compliance
Standards	UL 62368-1 CSA C22.2 No 62368-1 FCC part 15 Subpart B
IP Degree of Protection	IP44
Ambient air temperature for operation	23...140 °F (-5...60 °C)
Relative Humidity	5...95 %
Operating altitude	0...10000 ft
Ambient Air Temperature for Storage	-13...149 °F (-25...65 °C)
Storage Relative Humidity	5...95 %
Storage altitude	0...50000 ft (0.0000000000...15240.0000000000 m)

Ordering and shipping details

GTIN	731304439769
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	67.72 in (172 cm)
Package 1 Width	4.57 in (11.6 cm)
Package 1 Length	8.19 in (20.8 cm)
Package 1 Weight	19.0 lb(US) (8.6 kg)

Contractual warranty

Warranty	3 years repair or replace
-----------------	---------------------------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **9379**

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard **No**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Compliant**

REACH Regulation [REACH Declaration](#)

Use Again

Repack and remanufacture


Circularity Profile [End of Life Information](#)

Take-back **No**

WEEE  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Image of product / Alternate images

Alternative



Deploy IT gear faster

- 4-in-1 outlet to simplify planning
- Alternating phase and color-coded outlets
- Fast, flexible mounting


Handle high density loads

- More outlets and kW
- Slim design to fit more PDUs in one rack

Avoid downtime

- 60° operating temperature
- Environmental sensors
- Live swap display

Multiple color options available

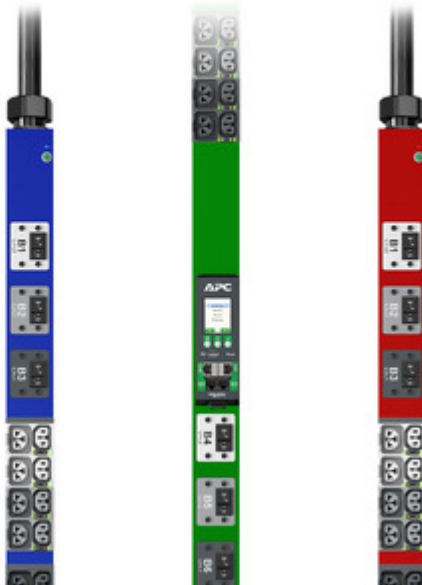

4-in-1 outlet for increased flexibility



Acts as any of these outlet types:



C13



C15



C19



C21











