

CX-92 Series 600 lbs. & 1200 lbs. Double Door Magnetic Locks



UL 1034 / UL 294
Standard for
Burglary-Resistant
Electric Locking
Mechanisms



ULC S533-15
Standard for
Access and Egress



600 lbs.



1200 lbs.

CX-92 Series 600 lbs. & 1200 lbs. Double Door Magnetic Locks offer the best performance and value.

A 'TDS' option provides an adjustable timer, lock sensor, door status switch, relay and LED.

Camden's Magnetic Locks are easily installed. A metal mounting template is packaged with the unit.

Vandal resistant construction is built to last - lifetime warranty!



BEST VALUE



BEST QUALITY

Features

- Weather and vandal resistant construction proven over thousands of installations
- Compatible with all access / egress systems
- Field selectable 12/24 VDC operation
- On board MOV power surge protection prevents damage to the magnetic lock
- A range of mounting brackets and spacers available



SPECIFICATIONS

VOLTAGE: 480mA @ 12 VDC, 240mA @ 24 VDC

CURRENT DRAW: **CX-92S-06:** 480mA/12VDC | 240mA/24 VDC x 2
TDS: 510mA/12VDC | 285mA/24 VDC x 2

CX-92S-12: 420mA/12VDC | 210mA/24 VDC x 2
TDS: 500mA/12VDC | 265mA/24 VDC x 2

CONTACT RATING: TDS Models Only:
 Bond Sensor: 2A @ 24 VDC
 Door Status Switch: 0.5A @ 28V AC/DC

HOLDING FORCE: **CX-91S-06:** 600 lbs. (272 kg.)
CX-91S-12: 1200 lbs. (544 kg.)

TEMPERATURE RANGE: 32°F - 131°F (0°C to 55°C)

DIMENSIONS: **Body:**
CX-92S-06: 19-3/4"W x 1-5/8"H x 1-1/8"D
 (500mm x 42mm x 27mm)
CX-92S-12: 21"W x 2-5/8"H x 1-9/16"D
 (532mm x 67mm x 40mm)

Armature Plate:
CX-92S-06: 2 x 7-1/4"W x 1-1/2"H x 15/32"D
 2 x (185mm x 38mm x 12mm)
CX-92S-12: 2 x 7-9/32"W x 3"H x 5/8"D
 2 x (185mm x 61mm x 16.5mm)

ORDERING INFORMATION

MODELS


CX-92S-06	600 lbs. Surface Mount Double Door - Basic
CX-92S-06TDS	600 lbs. Surface Mount Double Door - With adjustable timer, door status switch, lock sensor, relay and LED
CX-92S-12	1200 lbs. Surface Mount Double Door - Basic
CX-92S-12TDS	1200 lbs. Surface Mount Double Door - With adjustable timer, door status switch, lock sensor, relay and LED

ALL-BLACK FINISH


CX-92S-06-BK	600 lbs. Surface Mount Double Door - Basic - All-black finish
CX-92S-06TDS-BK	600 lbs. Surface Mount Double Door - With adjustable timer, door status switch, lock sensor, relay and LED - All-black finish
CX-92S-12-BK	1200 lbs. Surface Mount Double Door - Basic - All-black finish
CX-92S-12TDS-BK	1200 lbs. Surface Mount Double Door - With adjustable timer, door status switch, lock sensor, relay and LED - All-black finish

DIMENSIONS

CX-92S - 600 lbs.

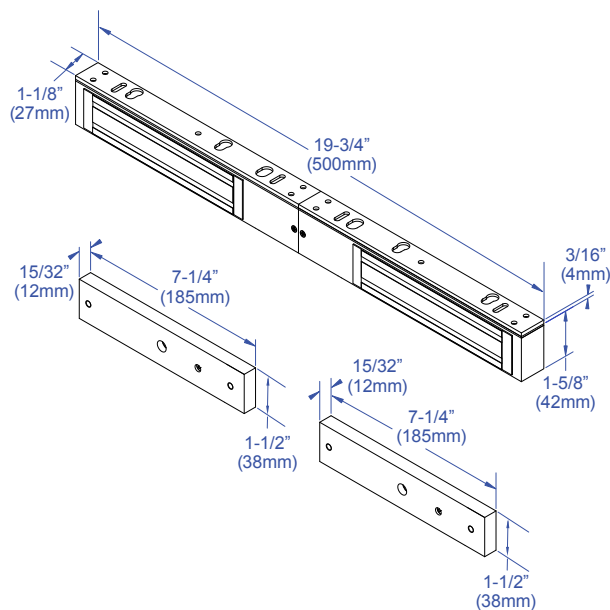

CX-92S - 1200 lbs.

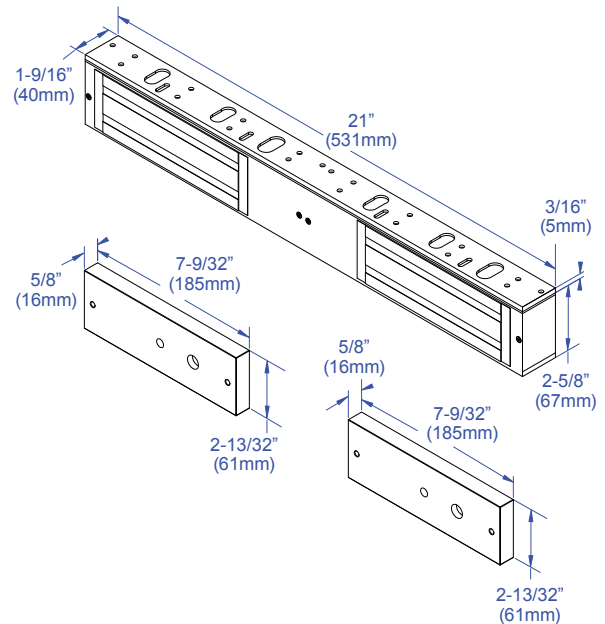

Opening New Doors to Innovation, Quality, and Support!

2395 Skymark Ave, Mississauga, ON Canada L4W 4Y6 • Toll Free: 1(877) 226-3369 (CAMDEN9)
 Tel: (905) 366-3377 | Fax: (905) 366-3378 | E-mail: info@camdencontrols.com | www.camdencontrols.com



Part #: MKTG-LIT-SP-CX-92Series_R2