


TempoA2B

Occupancy Alert System



Altronix TempoA2B is designed to alert management when unauthorized loitering occurs in up to (two) secure rooms. TempoA2B has built-in LINQ Technology to remotely monitor, control and report power/diagnostics.

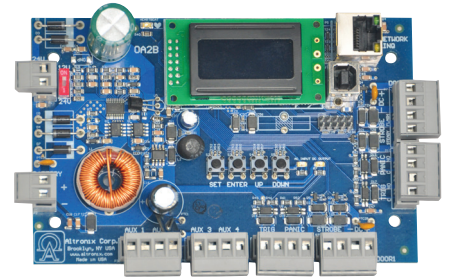

TempoA2B

Specifications

Input Power Options

Input	24VAC/50VA transformer or 24VDC
Trigger	Two (2) Door Sensor/Trigger inputs Two (2) Strobe "Steady" Trigger Inputs Two (2) Strobe "Flash" Trigger Inputs Two (2) "Panic/Emergency" Trigger Inputs

Output Options:

12VDC/2.5A, 24VDC/1.25A, (30W)
Two (2) Strobe Switched Power Outputs
Four (4) Aux. Power Outputs

Timer

- Alphanumeric LCD display simplifies programming.
- EE Prom memory protects against loss of programming due to power failure
- Momentary and/or Latching Events

Battery Charging

Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Indicators (LED)

AC Power (Green)	Input voltage is present
DC Output (Red)	12/24VDC is on
Trigger	Active

LINQ Technology:

- Remote network management allows for device reset and monitoring
- Provides local and/or remote access to critical information via LAN/WAN
- Email and Windows Dashboard Alert notifications report real-time diagnostics
- Event log tracks history

Physical and Environmental

Dimensions (L x W x H)

Board:	6.125" x 3.875" x 1.5" (155.6mm x 98.4mm x 38.1mm)
Shipping:	10" x 8" x 4" (254mm x 203.2mm x 101.6mm)

Weight (approx.)

Product Weight:	0.7 lb. (0.32 kg)
Shipping Weight:	1.1 lb. (0.5 kg)

Temperature

Operating:	0°C to 49°C (32°F to 120°F)
Storage:	-20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.) 61 BTU/Hr.

Mounting hardware is included

Lifetime Warranty