



## DATA SHEET

---

### 4-Port USB-A Hub

Add four USB 2.0 ports to your computer and transfer data up to 480Mbps

#### OVERVIEW

The 4-Port USB-A Hub expands the USB capabilities of a computer by providing four USB-A ports, so you can connect more peripherals and transfer data up to 480Mbps—ideal for supporting keyboards, mice, flash storage drives, and other low-powered USB devices. Small, lightweight, and portable, the hub can easily fit on your desktop or be stored in a laptop case. This hub is a perfect accessory for the Microsoft® Surface® Book 2, Chromebooks, and other leading laptops and tablets.

With a transfer rate of up to 480Mbps, it is fully backward compatible with older USB 1.1 devices. No need to worry about software or drivers to install, the plug-and-play feature makes it simple to just connect and start using right away.

#### FEATURES

- Four USB 2.0 ports to add peripherals and transfer data up to 480Mbps
- Compact design reduces desktop clutter and makes it easy to travel
- Flexible built-in cable to reduce strain on the connected computer's port
- Backward compatible with previous USB specifications and devices
- Plug-and-Play, just connect and use right away
- Perfect for laptops, Chromebooks, and the Microsoft® Surface® Book 2

ITEM	DESCRIPTION
------	-------------

C2G54462	4-Port USB-A Hub
----------	------------------

## SIGNAL SPECIFICATIONS

- Supports USB 2.0 Input; Four USB 2.0 Outputs
- Max 500mA per port (only one port is connected), Max 500mA for four ports when four ports are connected
- Supports USB 2.0 (480Mbps) transmission, downward compatible with USB 1.1

## ELECTRICAL SPECIFICATIONS


- Rating: Temp 80°C; Voltage 30V
- Conductor Resistance: At 20°C Max 34AWG: 860 OHMS/KM
- Insulation Resistance: 10M-KM Min at 20°C DC 500V (EIA-364-21)
- Dielectric Strength: AC 500V/1 Minute No Breakdown (EIA-364-20)

## PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to +45°C
- Operating Humidity: 10% to 85% RH (No Condensation)
- Storage Temperature: -10°C to +70°C
- Storage Humidity: 5% to 90% RH (No Condensation)

## PHYSICAL CHARACTERISTICS

- USB-A Male: Insulation: White, Shell Nickel Plated
- USB-A Female: Insulation: White, Shell Nickel Plated
- USB-A Male Molding Material: Black ABS Conforms ROHS
- USB-A Female Molding Material: Black ABS Conforms ROHS
- Cable OD: 3.0mm
- Cable Bend Radius: 45mm
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2

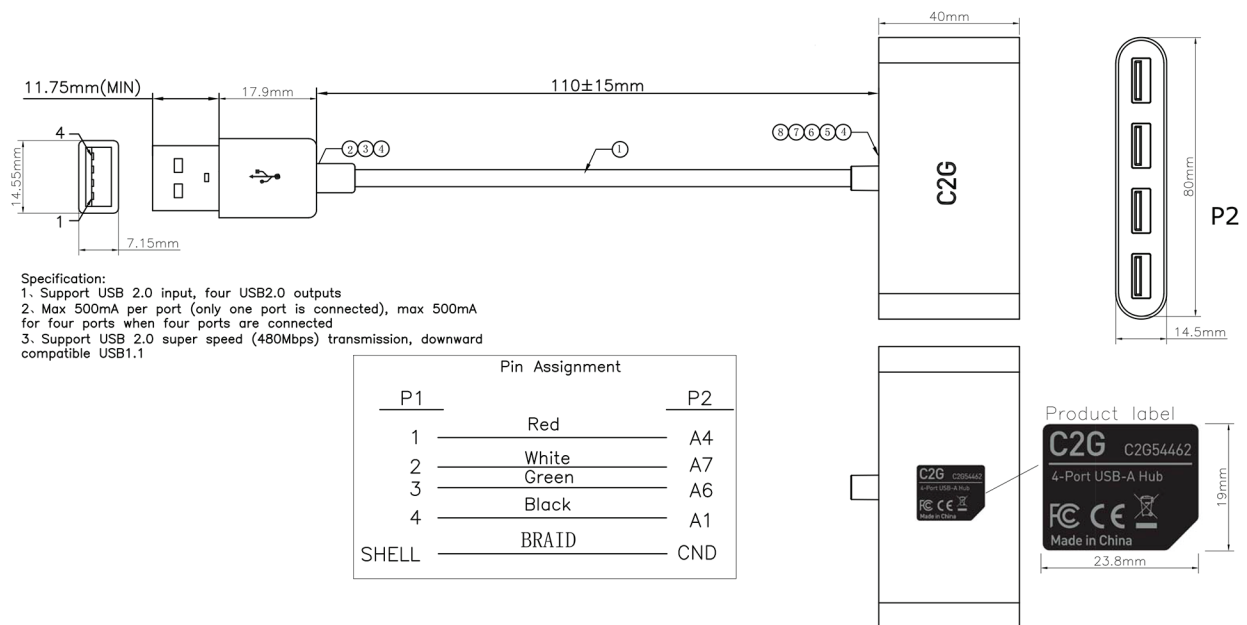

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY | [c2g.com](http://c2g.com) | [legrandav.com](http://legrandav.com)

USA P 800.CABL.911 E [trg@c2g.com](mailto:trg@c2g.com)