


Product Specifications

Optical Fiber Splice Box

KEY FEATURES

- Telcordia GR-769 compliant
- Four slots for fusion splice protection sleeves
- Capacity for two DX LC or two SX SC adapters
- Available to mount on either standard American or European wall box/bracket or flat surfaces (wall, board, etc.)
- Constructed in ABS thermoplastic
- Typical applications are interconnection points, transition points, FTTx, POL, etc.

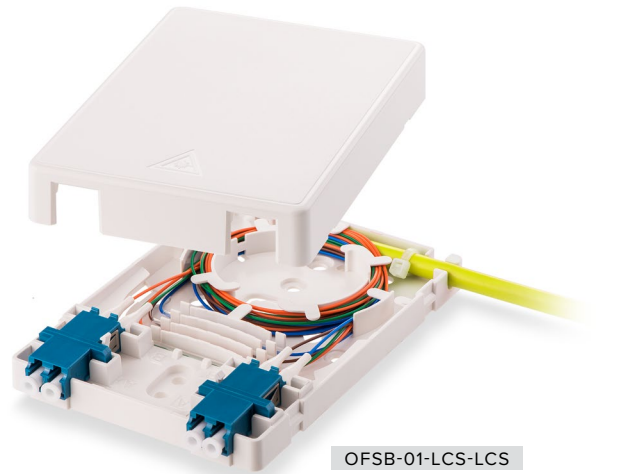

OFSB-01-LCS-LCS



Optical Fiber Splice Box

ORDERING INFORMATION

PART NO.	DESCRIPTION
OFSB-01	Optical fiber splice box, capacity: 2 adapters, 4 splices

Boxes are supplied as a kit that includes the following:

- | | |
|---|---|
| (4) 3x40 mm fusion splice sleeves | (2) Nylon cable ties |
| (2) #6-32x7/8 machine screws
(wall box/bracket mounting) | (2) #6x3/4 wood screws
(wall mounting) |
| (1) Self-adhesive ID label | (1) Dimension Drawing |
| (1) Product Specification Sheet | (1) Installation Instructions |

Pre-Assembled Optical Fiber Splice Box

ORDERING CONFIGURATION

BASE	ADAPTER 1		ADAPTER 2	
PART NUMBER	TYPE	CLASS	TYPE	CLASS
OFSB-01	XX	X	XX	X
	SC: SC SX	1: OM1	SC: SC SX	1: OM1
	LC: LC DX	2: OM2	LC: LC DX	2: OM2
		3: OM3		3: OM3
		4: OM4		4: OM4
		5: OM5		5: OM5
		S: SM		S: SM
	SCA: SC APC SX		SCA: SC APC SX	
	LCA: LC APC DX		LCA: LC APC DX	

P/N Example: **OFSB-01-LCA-LCA** - Pre-assembled OFSB-01 with two LC APC DX adapters and set of matching accessories

Each pre-assembled kit will include the following:

- 1 to 2 flanged optical fiber adapters
- 1 to 4 - 1 m optical fiber pigtails
- 1 to 4 - 3x40 mm fusion splice sleeves
- (2) #6x3/4 wood screws (wall mounting)
- (2) #6-32x7/8 machine screws (wall box/bracket mounting)
- (2) Nylon cable ties
- Self-adhesive ID label

Product Specifications

Optical Fiber Splice Box



SPECIFICATIONS

CAPACITY

- Adapters: Up to 2
- Fibers: Up to 4
- Sleeves: Up to 4 (40 mm)

CONSTRUCTION

ABS thermoplastic

DIMENSIONS

0.71" D x 3.31" W x 4.61" H (18 mm x 84 mm x 117 mm)

ENVIRONMENTAL CONDITIONS

Operation: 14 °F to 140 °F (-10 °C to 60 °C)

Storage: -40 °F to 158 °F (-40 °C to 70 °C)

Operating RH: 93% Max (non-condensing)




COMPLIANCE

Telcordia GR-769

WARRANTY

5 - Year Limited Component

INTERNAL DETAILS & FEATURES

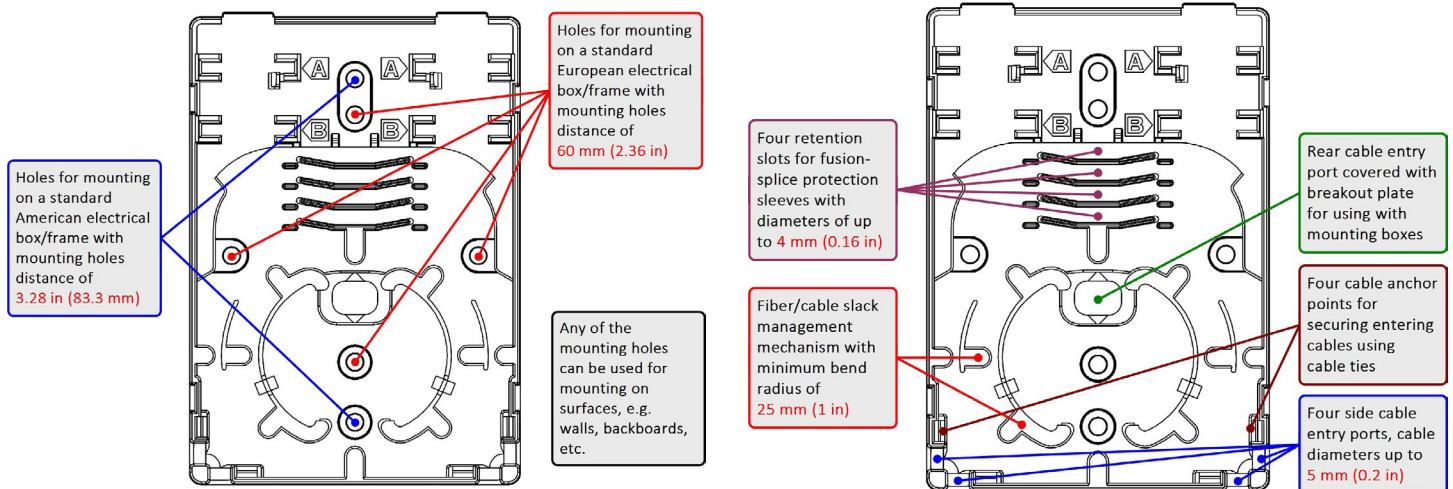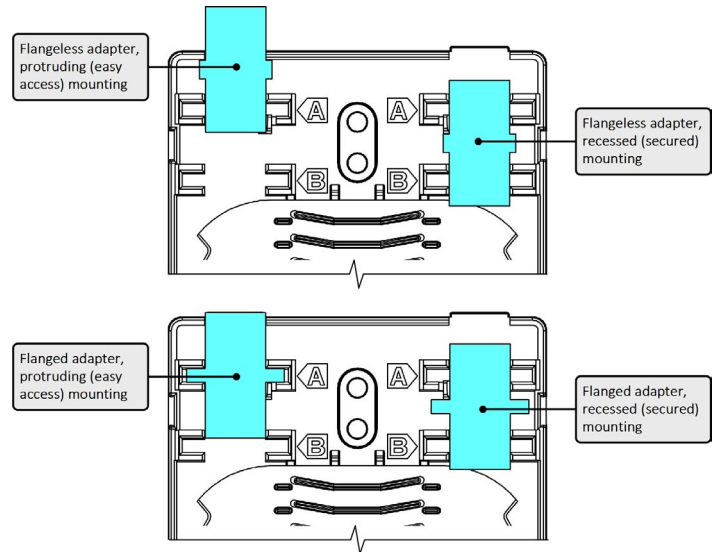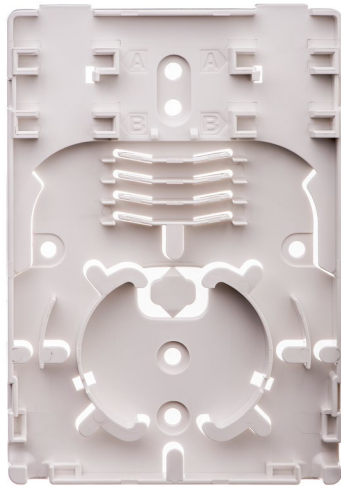

KEEPING YOUR WORLD CONNECTED