

EASYCELL-ACP

AC Wall Adapter (indoor / desktop use only)



Specifications

+ Power

Input Voltage

100 - 240 VAC

Input frequency

50/60 Hz

Input current

0.6 A

Input connector

US (Type A)

Output voltage

12 VDC

Output current

1.5A

Output connector

4 - PIN, 3 mm pitch

Input voltage absolute maximum

90 - 264 VAC

Input frequency absolute maximum

47 - 63 Hz

Inrush current

60 A

Output voltage absolute maximum

11.4 - 12.6 VDC

Short circuit protection

Yes

HIPOT (dielectric withstand test)

Primary to Secondary: 4000 VDC

MTBF

30000 h

+ Physical Specifications

Weight

82.6 g

Dimensions

55.7mm x 27.0mm x 35.7mm (W x D x H)

Cable

2000mm

+ Standards

Safety

UL 62368-1:2014 Ed.2

CSA C22.2 NO. 62368-1:2014 Ed.2

EMC


FCC Part 15, Subpart B: 2017

ANSI C63.4:2014

Energy efficiency

Level VI

Dimensions

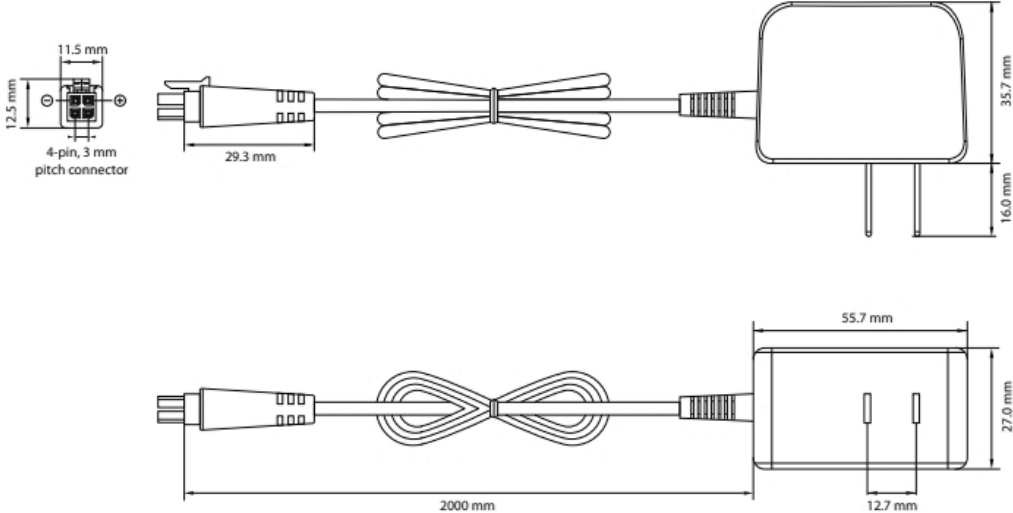

Ordering Information

+ Part Number

EASYCELL-ACP AC Wall Adapter (indoor / desktop use only)

+ Related Products

- [EasyCell5G](#) Hardened 5G / LTE Cellular Router with Dual SIM, Wi-Fi, GPS, and Five Gigabit RJ45 Ports
- [EasyCell](#) Hardened 4G LTE Cellular Router with Wi-Fi, and Two RJ45 Ports

