

Best-in-Class Outlet Density

Optimal Form Factors

Superior Reliability


smartzone™ G5

Security and Environmental Monitoring Solutions with Panduit® SmartZone™ G5 iPDU Solution

PANDUIT®

Security Solution

- iPDUs (intelligent pdu series: Metered Input, Monitored per Outlet, Metered, and Switched, Metered- and Switched per Outlet)
- SmartZone™ G5 Security Handle with Dual Freq Card Reader (ACF05) or SmartZone™ G5 Security Handle with Dual Freq Card Reader and Keypad enabling Dual Authentication (ACF06)
- Cable Harness (ACF20) that connects the SmartZone™ G5 Security Handle to the SmartZone™ G5 iPDU
- Recommend using MA030 extension cord and coupler enabling cabinet door removal via quick disconnect
- Recommend using ACA01 door contact sensor to enable physical sensing of door position

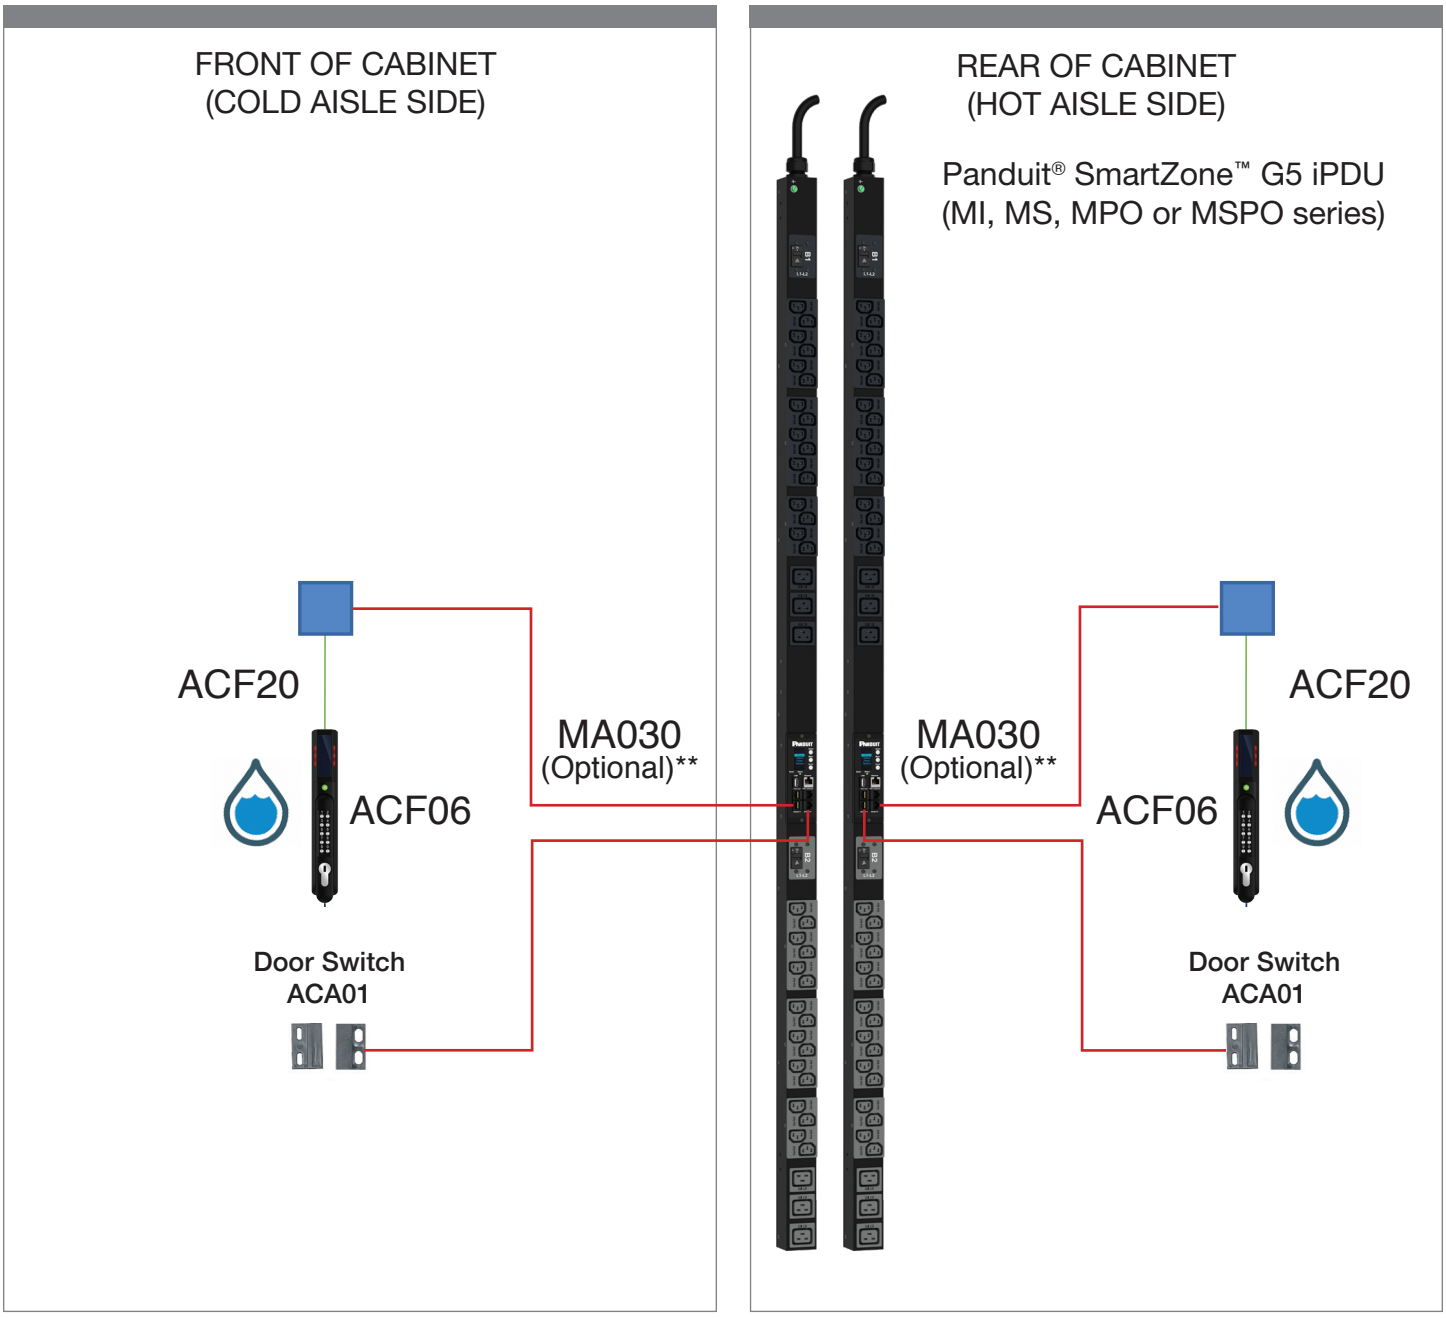

*A maximum of 200 HID Cards can be managed

**The MA030 features a coupler to optimize door removal and is 10 ft. (3 m) in length

Environmental Solution

- iPDUs (intelligent pdu series: Metered Input, Monitored per Outlet, Metered and Switched, Metered and Switched per Outlet)
- 3-way Temperature & Humidity Sensor (EC001), in the front door
- Temperature Sensor (EA001), in the rear door

FRONT OF CABINET
(COLD AISLE SIDE)

**3 Temperature and
1 Humidity Sensor - EC001**



REAR OF CABINET
(HOT AISLE SIDE)

Panduit® SmartZone™ G5 iPDU
(MI, MS, MPO, or MSPO series)




Temperature Sensor - EA001



Security and Environmental Solution

- iPDUs (intelligent pdu series: Metered Input, Monitored per Outlet, Metered and Switched, Metered and Switched per Outlet)
- SmartZone™ G5 Security Handle with Dual Freq Card Reader (ACF05) or SmartZone™ G5 Security Handle with Dual Freq Card Reader and Keypad enabling Dual Authentication (ACF06)
- Cable Harness (ACF20) that connects the SmartZone™ G5 Security Handle to the SmartZone™ G5 iPDU
- Recommend using MA030 extension cord and coupler enabling cabinet door removal via quick disconnect
- Recommend using ACA01 door contact sensor to enable physical sensing of door position

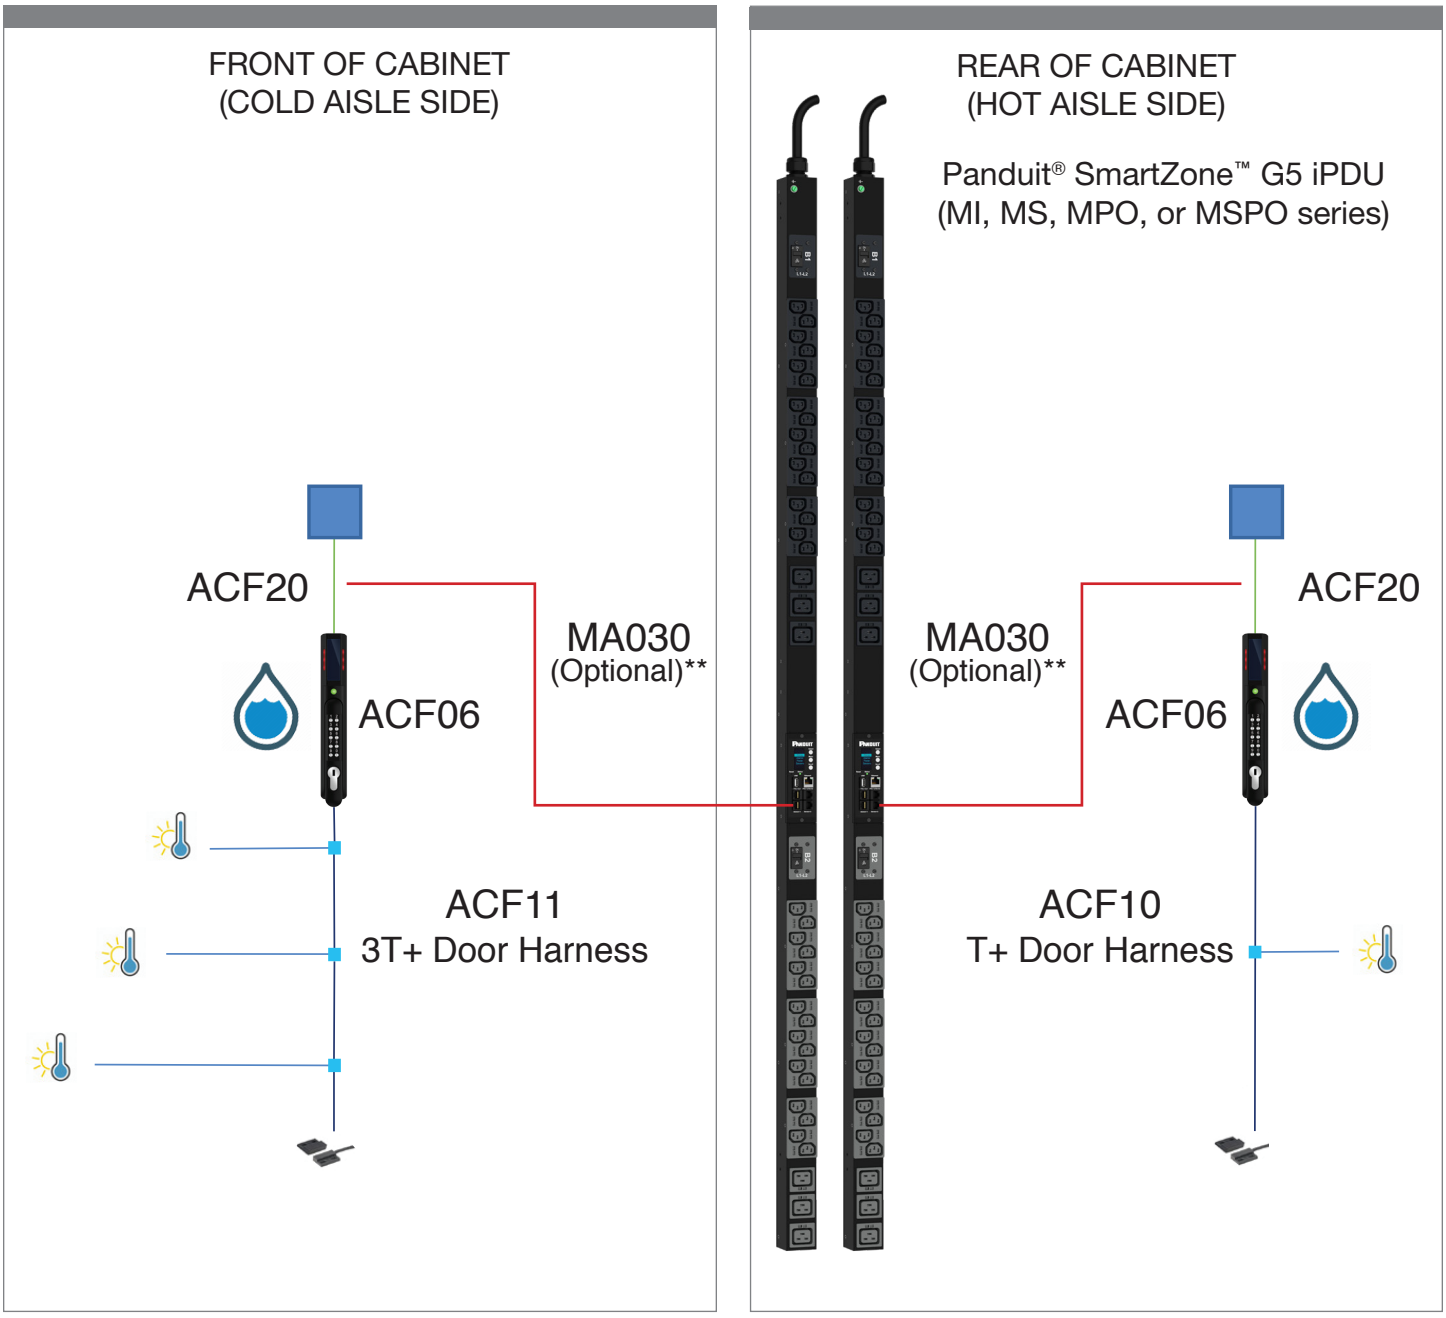

*A maximum of 200 HID Cards can be managed

**The MA030 features a coupler to optimize door removal and is 10 ft. (3 m) in length

©2020 Panduit Corp. ALL RIGHTS RESERVED. PUFL07--SA-ENG 12/2020