


PN, PT, PS, PD Series

Vandal Resistant Push Plates

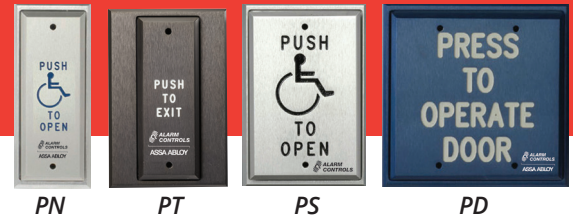

Vandal resistant push plates with hardwired switches are designed for automatic door activation and request to exit applications. Push plates are available in narrow, T-style, single and double gang options.

Features

Standard Features

- **PN** 1-7/8" narrow stile plate is suitable for mullion mounting
- **PT/PS** T-Style and Single Gang plates mount on standard single gang electrical box
- **PD** Mounts on standard double gang electrical box
- Machined from solid aluminum with engraved text and anodized finish
- Tamper resistant mounting
- Vandal resistant; Designed for use in high traffic areas
- Pneumatic time delay 2 to 60 seconds

Options

- Finish: multiple plate finish options available
- Plate engraving, available with: "Push to Exit", "Push to Operate", "Push to Open", ADA Symbol, "Emergency Door Release"
- Engraving Fill: multiple options available

Specifications

Certifications & Listings

- UL 294 (6th edition) listed
- NFPA-101

Dimensions

- **PN:**
 - Plate: 4-1/2"H x 1-7/8"W
 - Button: 4"H x 1-1/2"W
- **PT:**
 - Plate: 4-1/2"H x 3"W
 - Button: 4"H x 1-1/2"W
- **PS:**
 - Plate: 4-1/2"H x 3"W
 - Button: 4"H x 2-5/8"W
- **PD:**
 - Plate: 4-1/2"H x 4-1/2"W
 - Button: 4"H x 4-1/8"W

Electrical

- Pneumatic Switch Specifications:
 - Contact Rating: 2A @ 28VDC
 - Switch depth behind plate: 1.50"
 - Switches terminated in 22AWG colored leads:
 - Normally-Closed Pair- Red
 - Normally-Open Pair- Blue

How To Order

PLATE	SWITCH TYPE	FINISH	ENGRAVING*	PUSH PLATES - PN, PT, PS, PD
PS	5	1	1	1
PN - Narrow	5 - Pneumatic Time Delay (2 to 60 seconds)	1 - Clear	1 - Push to Exit	1 - Black
PT - T-Style		2 - Bronze	2 - Push to Operate	2 - Red
PS - Single Gang		3 - Brass	4 - ADA Symbol Push to Open	3 - White
PD - Double Gang		4 - Blue	5 - Emergency Door Release	4 - Blue
		5 - Black		
		6 - Red		

* Push to Open, Emergency Door Release engraving options not available on PD Double Gang Plates.