



## 16-Outlet Industrial Surge Protector, 15 ft. (4.57 m) Cord, 1650 Joules, Metal Housing, 48 in. Length

MODEL NUMBER: **SS7415-15**

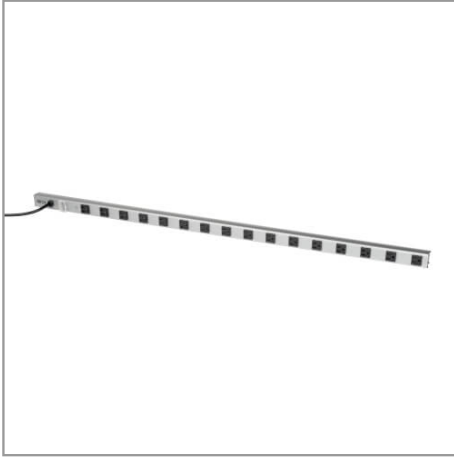

Safeguard your valuable electronics against dangerous surges, spikes and line noise. Recommended for equipment racks, server rooms, workbenches, raceways and other commercial applications requiring AC line protection.

### Description

Recommended for connecting multiple loads in commercial or retail environments, the SS7415-15 16-Outlet Industrial Surge Protector features a surge protection rating of 1650 joules to defend your sensitive electronic components against strong surges and spikes. It filters out electromagnetic interference (EMI) and radio frequency interference (RFI) that can disrupt your electronics and inflict hardware damage or data loss.

Your devices plug into 16 NEMA 5-15R outlets, which are spaced 2.7 inches apart center to center to reduce cable clutter and accommodate bulky transformers. An integrated 15A circuit breaker protects all outlets and shuts down connected equipment in case of overload. The lighted on/off switch with transparent safety cover provides one-touch control over connected equipment. A diagnostic LED confirms your connected equipment is protected.

The long 15-ft. (4.57 m) AC power cord with NEMA 5-15P plug gives you flexibility to reach distant outlets while fitting easily into your setup. Adjustable clips are included for mounting the 48-inch all-metal housing horizontally or vertically on a variety of surfaces.

### Features

#### 1650-Joule Surge Protection for Industrial Electronics

- Protects multiple loads against even the strongest surges and spikes in equipment racks, server rooms, workbenches, raceways and other commercial or retail environments
- Recommended for networks, telecom systems, audio/video systems and live sound applications requiring AC line protection
- Filters out disruptive EMI/RFI line noise that can cause equipment damage or data loss

#### 16 Outlets Accept Wide Range of Electronic Devices

- 16 NEMA 5-15R AC outlets accept most computer, networking and telecom equipment
- Outlets are spaced 2.7 in. center to center to reduce cable clutter and accommodate bulky transformers

#### Premium Safety Features

- Lighted on/off switch with transparent locking safety cover provides one-touch control over connected

### Highlights

- 16 NEMA 5-15R outlets with 2.7 in. center-to-center spacing
- 1650-joule surge protection rating
- Filters out threatening EMI/RFI line noise
- 15-ft. (4.57 m) AC power cord with NEMA 5-15P plug
- Mounts horizontally or vertically on a variety of surfaces

### Package Includes

- SS7415-15 16-Outlet Industrial Surge Protector, Metal Housing
- Adjustable mounting clips
- Owner's manual



Powering Business Worldwide

TRIPP LITE  
SERIES

equipment

- Integrated 15A circuit breaker shuts down outlets in case of power overload
- Diagnostic LED confirms protection status at a glance
- Conforms to current UL 1449 3rd Edition safety standards

#### Flexible Mounting Options

- Included clips allow mounting horizontally or vertically on a variety of surfaces
- Long 15-ft. (4.57 m) AC power cord with NEMA 5-15P plug reaches distant outlets
- All-metal 48 in. housing designed for long life

## Specifications

| OVERVIEW                           |                                    |
|------------------------------------|------------------------------------|
| UPC Code                           | 037332100290                       |
| INPUT                              |                                    |
| Nominal Input Voltage(s) Supported | 120V AC                            |
| Recommended Electrical Service     | 120V                               |
| Input Cord Gauge Type              | 14 gauge; SJT                      |
| Input Cord Gauge (AWG)             | 14                                 |
| Voltage Compatibility (VAC)        | 120                                |
| Maximum Surge Amps                 | 22000                              |
| Input Plug Type                    | NEMA 5-15P                         |
| Input Cord Details                 | SJT                                |
| Input Cord Length (ft.)            | 15                                 |
| Right-Angle Plug                   | No                                 |
| Input Cord Length (m)              | 4.57                               |
| Integrated Cord Clip               | No                                 |
| OUTPUT                             |                                    |
| Frequency Compatibility            | 50 / 60 Hz                         |
| Output (Watts)                     | 1800                               |
| Output Receptacles                 | (16) 5-15R                         |
| Circuit Breaker (amps)             | 15                                 |
| Right-Angle Outlets                | No                                 |
| Outlet Spacing                     | 2.717-in. center-to-center spacing |
| USER INTERFACE, ALERTS & CONTROLS  |                                    |
| Diagnostic LED(s)                  | Yes                                |



Powering Business Worldwide

TRIPP LITE  
SERIES

|                                        |                                                                                                  |
|----------------------------------------|--------------------------------------------------------------------------------------------------|
| Switches                               | Combination AC circuit breaker and lighted 2-position power switch controls power to all outlets |
| Locking Switch Cover                   | Transparent locking switch cover                                                                 |
| <b>SURGE / NOISE SUPPRESSION</b>       |                                                                                                  |
| AC Suppression Joule Rating            | 1650                                                                                             |
| UL1449 Let Through Rating              | 500V UL verified                                                                                 |
| EMI / RFI Filtering                    | Yes                                                                                              |
| Automatic Shut-Off                     | Yes                                                                                              |
| <b>DATALINE SURGE SUPPRESSION</b>      |                                                                                                  |
| Cable (Coax) Protection                | No                                                                                               |
| Network (Ethernet) Protection          | No                                                                                               |
| Telephone/DSL Protection               | No                                                                                               |
| <b>PHYSICAL</b>                        |                                                                                                  |
| Power Cord Color                       | Black                                                                                            |
| Housing Color                          | Silver                                                                                           |
| Mounting Holes or Slots                | No                                                                                               |
| Outlets Measurement (Center to Center) | 67mm                                                                                             |
| Receptacle Color                       | Black                                                                                            |
| Shipping Dimensions (hwd / in.)        | 2.40 x 3.30 x 52.00                                                                              |
| Shipping Dimensions (hwd / cm)         | 6.10 x 8.38 x 132.08                                                                             |
| Shipping Weight (lbs.)                 | 4.50                                                                                             |
| Shipping Weight (kg)                   | 2.04                                                                                             |
| Unit Dimensions (hwd / in.)            | 1.250 x 1.620 x 48.000                                                                           |
| Unit Dimensions (hwd / cm)             | 121.92 x 3.81 x 3.81                                                                             |
| Unit Weight (lbs.)                     | 2.89                                                                                             |
| Unit Weight (kg)                       | 1.31                                                                                             |
| Outlet Spacing                         | 2.717-in. center-to-center spacing                                                               |
| Mounting Details                       | Set of adjustable mounting clamps                                                                |
| <b>FEATURES &amp; SPECIFICATIONS</b>   |                                                                                                  |
| Rotatable Outlets                      | No                                                                                               |
| Antimicrobial                          | No                                                                                               |
| Mounting Accessory Included            | Yes                                                                                              |
| <b>STANDARDS &amp; COMPLIANCE</b>      |                                                                                                  |



Powering Business Worldwide

TRIPP LITE  
SERIES

|                                     |                                         |
|-------------------------------------|-----------------------------------------|
| Product Certifications              | cUL Listed; UL 1449; UL 1363; UL Listed |
| Product Compliance                  | RoHS                                    |
| WARRANTY & SUPPORT                  |                                         |
| Product Warranty Period (Worldwide) | Lifetime limited warranty               |

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.