

STI LIFE RING THEFT STOPPER®



STI-6210



PRODUCT OVERVIEW

This compact and self-contained alarm helps make sure waterside life rings are ready for use when required to save lives. Installation of the STI-6210 helps prevent misuse and theft of life rings but does not interfere with lifesaving operations in any way.

HOW IT WORKS

This Stopper uses a time-tested, steel cable operated switch mechanism that is activated when the cable is removed from the device. When the protected life ring is removed from its normal position, the device sounds a piercing 95 or 105 dB alarm. Immediate attention is drawn to the area and the prankster with either run before stealing the life ring or be caught. The highly visible stop sign design and “STOP – EMERGENCY USE ONLY” message on the unit’s faceplate serve as a deterrent itself. The sound of the alarm also helps draw attention to the area when a person is actually in need of the life ring. It is easy to install and all necessary screws, anchors and its 9 VDC battery power source are included.

KEY FEATURES

General Information

- Highly visible “stop sign” design discourages wrongful use of life rings.
- Deactivation cable provided for service by authorized personnel.
- Recommended operational range 32° to 120°F (0° to 49°C).
- Does not interfere with lifesaving operations.
- Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

Design

- Compact design 5.375 in. (137mm) in diameter and 2 in. (51mm deep).

Construction

- Virtually indestructible polycarbonate housing.

Installation

- Mounts next to life rings.
- Easy to install with all screws and anchors included.

Electronics

- Sounds a powerful 105 dB warning horn when activated, drawing attention in a hurry (95 dB low volume setting can be set if desired).
- Self-contained 9 VDC alkaline battery is provided.



STI Life Ring Theft Stopper®


Dimensions and Technical Information

MODEL AVAILABLE

STI-6210	Life Ring Theft Stopper
KIT-6702	Tamperproof screw kit
KIT-18015-9	Deactivation cable (6")
KIT-18015-RC	Replacement cable

NOTE

In moderate to high noise, a sound level check should be done (monthly) to verify audibility in all areas the unit is to alert. End user must verify the alarm and battery function every six months and replace battery annually or as required.



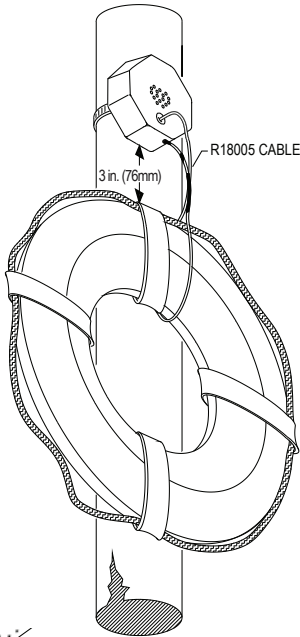


WARRANTY

Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

SPECIFICATIONS

Housing	1/8 in. Polycarbonate
Power Source	9 VDC Alkaline
Warning Horn at 1 foot	95 dB - Low 105 dB - High
Cable	1/8 in. galvanized steel 16 to 18 in. long
Dimensions	5 W x 5 H x 2 in. D 27 x 127 x 51mm
Standby Current	None
Alarm Current	40 mA at 95 dB 150 mA at 105 dB
Recommended Operating Temperature	32°F to 120°F (0°C to 49°C)

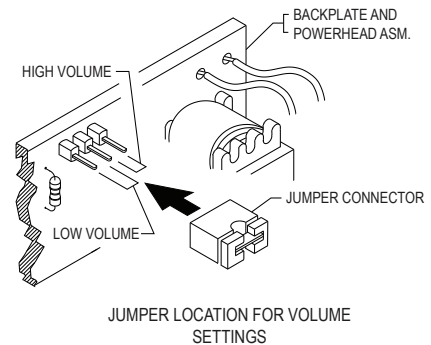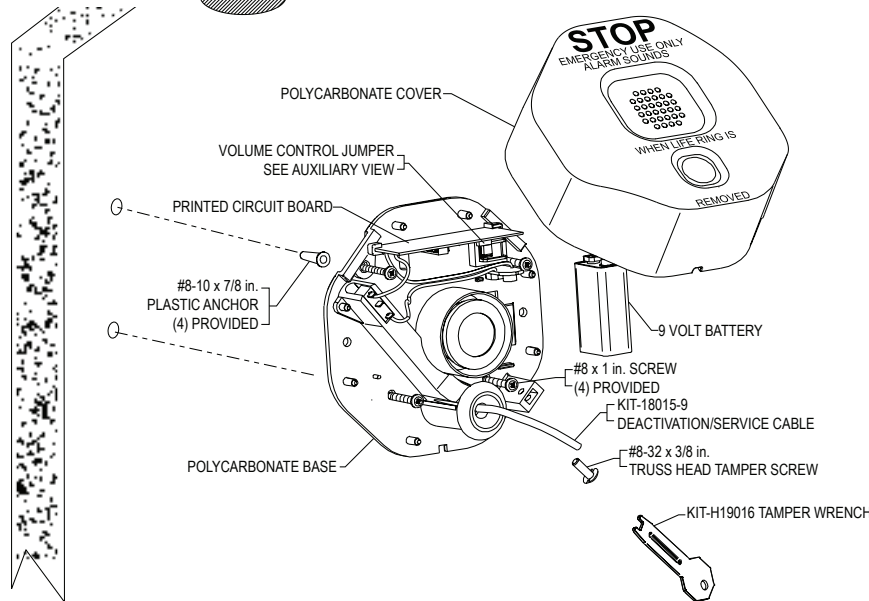

Safety Technology International

2306 Airport Road
Waterford, MI
48327, USA
info@sti-usa.com
www.sti-global.com
Tel: 248-673-9898

Taylor House
34 Sherwood Rd., Bromsgrove,
Worcs., B60 3DR, England

info@sti-emea.com
www.sti-global.com
Tel: +44 (0) 1527 520 999

Unit 7A Lockheed Avenue
Airport Business Park
Waterford X91 HWF2 Ireland