

Product Description

The KBC ESMPN24-C4-RXX-B series is a high performance, managed Gigabit switch with 24 Gigabit SFP ports and 4 uplink Gigabit copper/SFP combo interfaces. The 24 Gigabit SFP ports can be used to connect to media converters, unmanaged and managed switches. The combo design allows users flexibility to increase network expansion.




The switch supports rich network functionalities such as ERPS, VLAN, RSTP, rate limiting, port security, SNMP etc. Rugged design and level 3 protection makes it suitable for applications such as the Intelligent Transportation System, IP surveillance applications and networks.

The KBC ESMPN24-C4-RXX-B Ethernet switch is available as a 1U rack unit.

Product Features


- 24 Gigabit SFP ports and 4 Gigabit copper/SFP combo ports
- Web-based layer 2 network management by simple operation
- ITU-T G.8032 Ethernet ring protection, as well as STP, RSTP and MSTP
- Command Line Interface (CLI) for fast configuration of major management functions
- DHCP Option 82 for IP address assignment with different policies
- IGMP snooping and MLD snooping for constraining multicast traffic
- Supports private VLAN and IEEE802.1Q VLAN
- Lock port function based on MAC address for blocking unauthorized access
- Supports IEEE802.3ad LACP for optimum bandwidth utilization
- Supports QoS (IEEE802.1p/1Q and TOS/DiffServ) to increase determinism
- Supports TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Supports SNMPv1/v2c/v3 for different levels of network management
- RMON for efficient network monitoring and proactive capability
- Port mirroring for online debugging
- High-speed data forwarding, very suitable for large flow of video data forwarding in security surveillance
- Quick Installation, simple operation, convenient for desk/rack installation
- Optional redundant power supply

Typical System Configuration

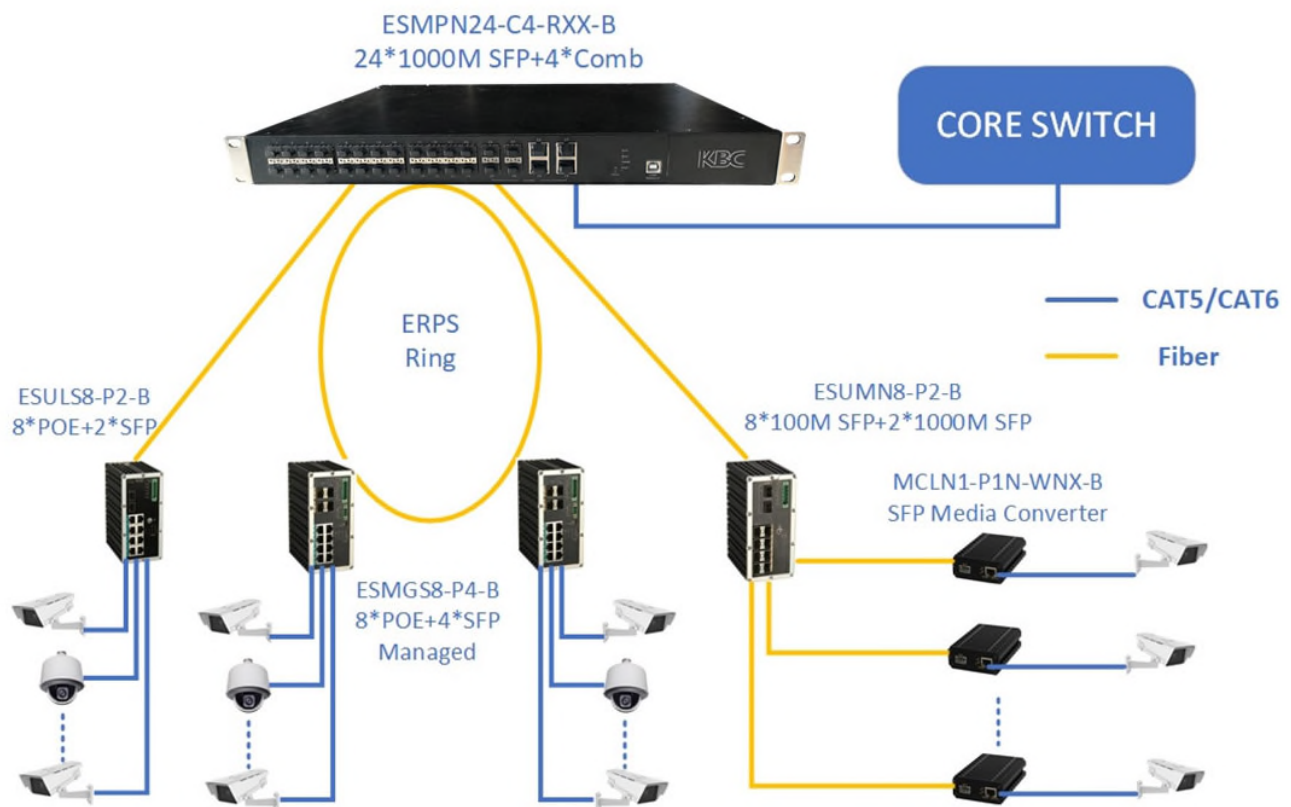

End to End Full Optical Network Transmission Solution From KBC

Part Number Configurator

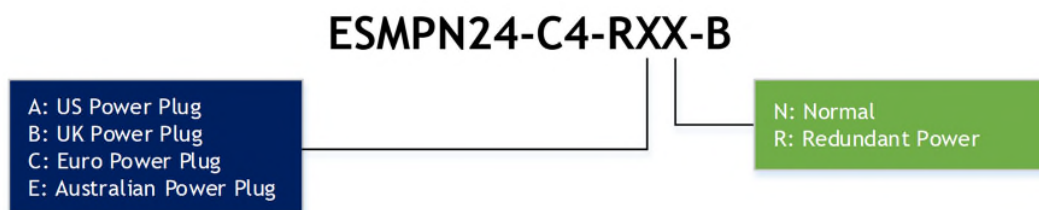

Specifications

Specifications

IEEE Standards

IEEE802.3, IEEE802.3u,
IEEE802.3z, IEEE802.3ab
IEEE802.3X, IEEE802.3ad
IEEE802.1Q, IEEE802.1p
IEEE802.1D, IEEE802.1X
IEEE802.1w, IEEE802.1s

Ports ⁽¹⁾

100/1000Mbps SFP
10/100/1000MBase-T

28 (including 4 Combo ports)
4 (Combo ports)

Switch Performance

Architecture
Capacity
Throughput
Mac Table
Memory Buffer
IGMP Group

Store-and-forward
80Gbps
42Mpps
32k
32M
1024

Layer 2 Functions

Management interface

Web-based GUI and CLI; SSH; Telnet
SNMP v1, v2 & v3

Port configuration

Port enable/disable; Full duplex;
Speed configuration;
Flow control enable/disable;
Port naming

VLAN

802.1Q VLAN protocol;
port-based VLAN; 4K VLAN

Quality of Service (QoS)

QoS Congestion Management;
15 priority queues; SP, WRR and
SP+WRR queue scheduling;
802.1p CoS/DSCP priority
IGMP v1/v2/v3, IGMP snooping,
MLI snooping

Multicasting

Layer 2 Functions (cont.)

Security

MAC, port&VLAN binding
combinations; 802.1X;
MAC address auto-learning,
aging and filtration;
Port isolation, port speed limit;
Link aggregation
FTP/TFTP/HTTP load upgrade;
Traffic statistics;
MAC address table query;
IP address, DNS server modifications;
User name and password
modification; History and log;
System Configuration Backup;
Recover the default factory settings

System

Power ⁽²⁾

Power Input
Power Consumption
Redundant Power ⁽³⁾

110~240VAC, 50/60Hz
<50W
Optional

Environmental

Operating Temperature
Storage Temperature
Operating Humidity

-40° ~ +50° C
-40° ~ +85° C
5% to 95% non-condensing

Mechanical


Dimensions (L x W x H)
Weight

445mm x 335mm x 44mm
5.8Kg

Protection

Surge
ESD

6KV, IEC61000-4-5
ESD Level 4: IEC61000-4-2
RS Level 3: IEC61000-4-3
EFT Level 4: IEC61000-4-4
CS Level 3: IEC61000-4-6

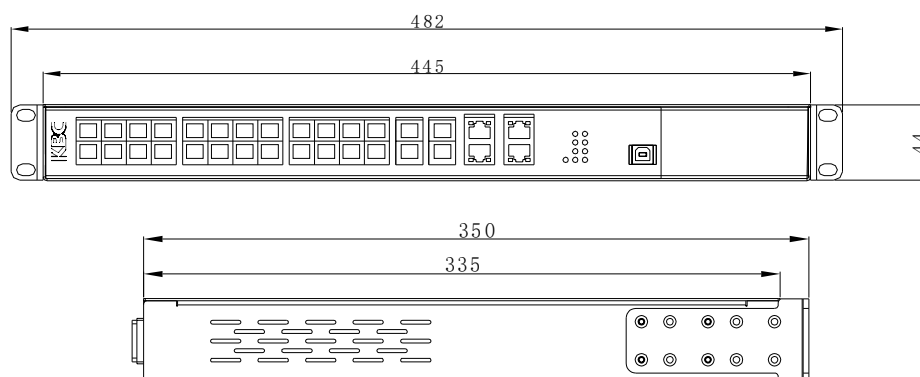

1. SFP module sold separately

2. Please select the power plug from US Standard, Euro 2 Circular or UK 3 Pin square or Australian when placing order.

3. Please refer to the Part Number Configurator section for part number of switch with redundant power option.

Due to ongoing technological improvements, product specifications are subject to change without notice. KBC is not liable for any errors, omissions or changes of any description of the goods contained herein. This information is for the sole purpose of identifying the products and KBC makes no warranty that the products conform to any description contained herein. Do not rely solely on any representations, statements, or assertions concerning these Products contained herein.