

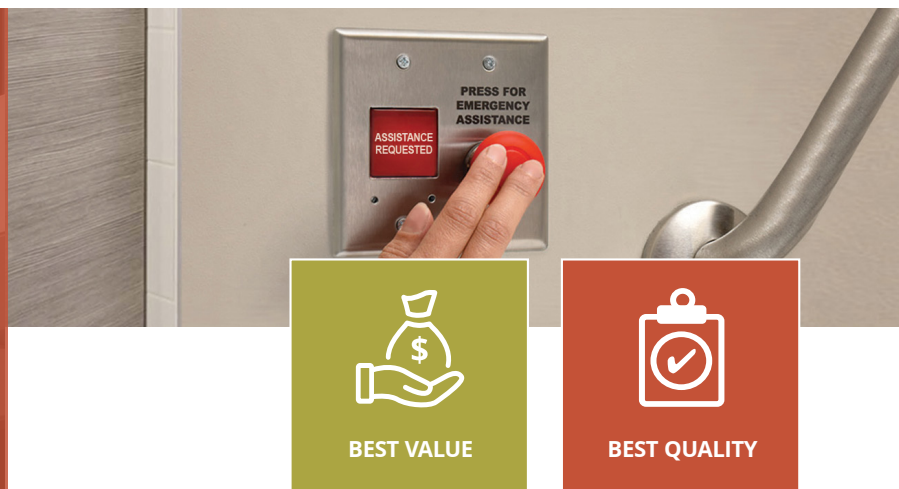
## CM-AF500 Series LED Annunciators



**Camden's CM-AF500 Series illuminated annunciators are designed to provide critical messages to building occupants.**

When not illuminated, the sign (text and/or graphics) is invisible. When illuminated, the text/graphics are highly visible - even in bright daylight. CM-AF500 series signs and push buttons are weatherproof and vandal resistant.

Field selectable 12/30V AC/DC operation allows the sign to be used in a variety of low voltage applications, including automatic door, access control and other low voltage systems.



### Features

- **CM-AF500:**  
(6) message insert labels included, English, French and Bilingual
- **CM-AF503:**  
Horizontal, curved, with (6) message labels
- **CM-AF501SO:**  
'Assistance Required' label, with sounder  
Adjustable 85dB sounder
- **Bright LEDs for high visibility, even in daylight**
- **Text /graphics are not legible when not illuminated**
- **Vandal and weather resistant construction**
- **3 year warranty**



## SPECIFICATIONS

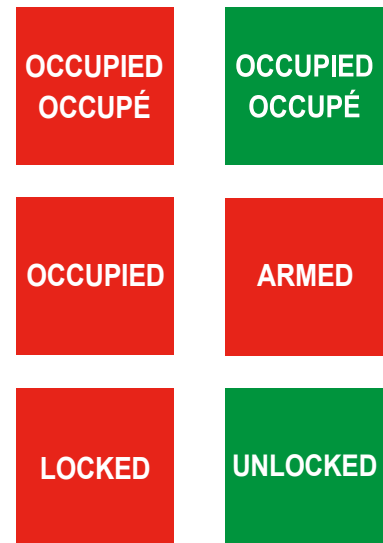
|               |                                                                               |              |                                                                                                                                                                                                                                     |
|---------------|-------------------------------------------------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VOLTAGE:      | 12/30V AC/DC                                                                  | STD FINISH:  | US 32 / C32D                                                                                                                                                                                                                        |
| CURRENT DRAW: | <b>CM-AF500 / AF550R:</b> 30 - 50mA<br><b>CM-AF501SO / AF540SO:</b> 30 - 75mA | PUSH BUTTON: | <b>CM-AF540SO:</b> Maintained (Push/Pull), N/O & N/C, 6A @ 30 VDC<br><b>CM-AF550R:</b> Momentary (Spring Action) N/O, 6A @ 30 VDC                                                                                                   |
| TEMP RANGE:   | 32°F - 176°F (0°C - 80°C)                                                     | DIMENSIONS:  | <b>CM-AF500 / CM-AF501SO:</b> 4-1/2"H x 2-3/4"W x 9/16"D (114mm x 70mm x 15mm)<br><b>CM-AF503:</b> 3"H x 5-9/10"W x 1/20"D (76mm x 127mm x 1mm)<br><b>CM-AF540SO / CM-AF550R:</b> 4-1/2"H x 4-1/2"W x 9/16"D (114mm x 114mm x 15mm) |
| CONSTRUCTION: | 18 gauge stainless steel faceplate                                            |              |                                                                                                                                                                                                                                     |
| SOUNDER:      | <b>CM-501SO / CM-AF540SO:</b><br>Adjustable, 85dB @ 10cm max.                 |              |                                                                                                                                                                                                                                     |

## MODELS




|                                                                                     |                   |                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <b>CM-AF500</b>   | Single Gang LED Illuminated Annunciator. Labels included: 'Occupied/Occupé' (Red & Green), 'Occupied' (Red), 'Armed' (Red), 'Locked' (Red) and 'Unlocked' (Green).                       |
|    | <b>CM-AF503</b>   | Single gang, horizontal, LED illuminated annunciator, curved profile designed for use with Column™ switches. With (6) English, French, and Bilingual message labels.                     |
|    | <b>CM-AF501SO</b> | Single gang LED annunciator with adjustable sounder, 'Assistance Requested'. Add suffix 'F' for French, suffix 'FE' for bilingual.                                                       |
|   | <b>CM-AF540SO</b> | Double gang, push/pull mushroom push button, red, 'Assistance Required', annunciator and adjustable sounder, 'Assistance Requested'. Add suffix 'F' to model number for French language. |
|  | <b>CM-AF550R</b>  | Double gang, mushroom push button, red, 'Push to Lock', with LED annunciator. Add suffix 'F' to model number for French language.                                                        |

## GRAPHIC OPTIONS

### CM-AF500 and CM-AF503 Inserts



## DIMENSIONS
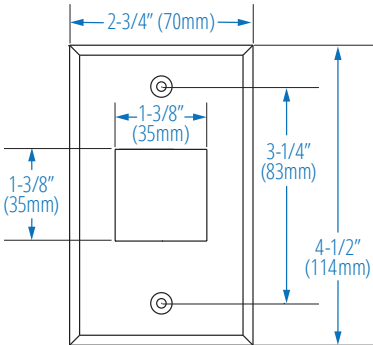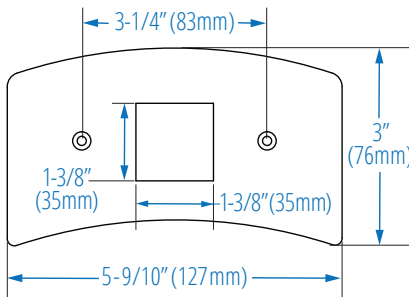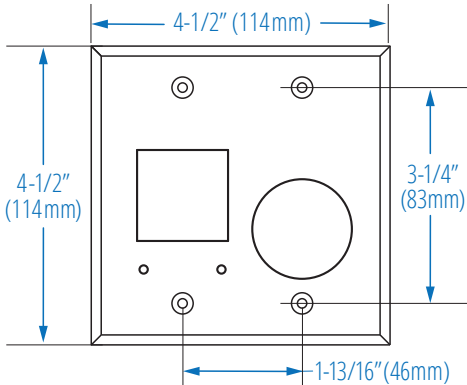
|                                                                                     |                                                                                      |                                                                                       |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |
| <b>CM-AF500 / CM-AF501SO</b>                                                        | <b>CM-AF503</b>                                                                      | <b>CM-AF540SO / CM-AF550R</b>                                                         |