


Part Number: TF4-OS2-PVC  
 4 Strand 900 µm Tight Buffer Singlemode  
 OS2 9/125 TiniFiber® Micro Armor™ + Steel  
 Braid YELLOW RISER (PVC) Indoor  
 Premise, Duct, Conduits, and Patch

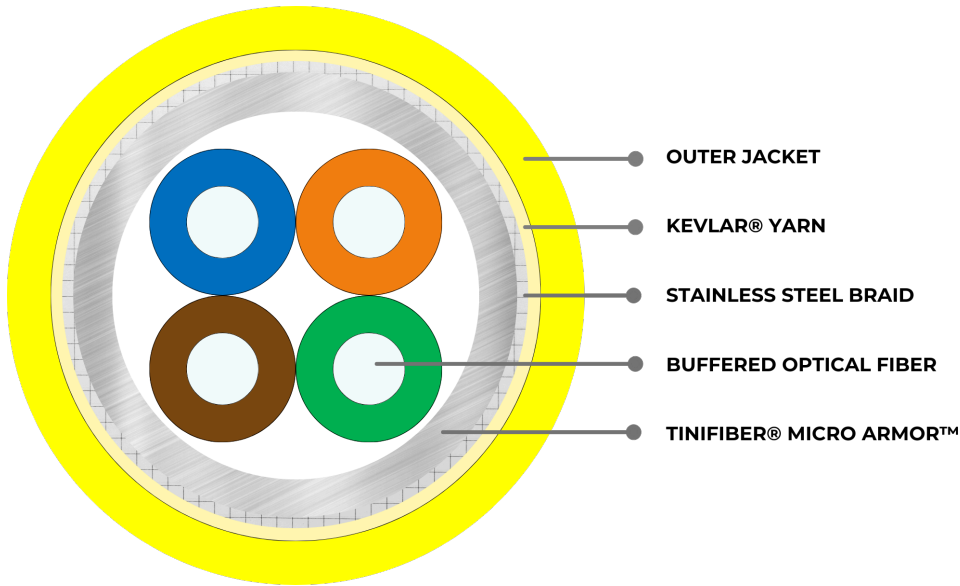

## General Specifications

<b>P/N</b>	TF4-OS2-PVC
<b>Application and Uses</b>	Indoor Premise, Duct, Conduits, and Patch
<b>Outer Jacket Specifications / Color</b>	RISER (PVC)   YELLOW
<b>Fiber Category</b>	Singlemode OS2 9/125
<b>Fiber Count / Grouping</b>	4 Strand
<b>Construction</b>	900 µm Tight Buffer
<b>Water Block</b>	FALSE
<b>Maximum Tensile Strength (Dynamic   Static)</b>	350 N   100 N
<b>Maximum Crush Resistance (Dynamic   Static)</b>	20 kN/m   5 kN/m
<b>Minimum Bend Radius (Dynamic   Static)</b>	20D   10D
<b>Nominal Outer Diameter</b>	4.65±0.15 mm
<b>Cable Weight</b>	33.5 kg/km (~23 lbs/kft)
<b>Installation Temperature</b>	0 to 60 °C (32 to 140 °F)
<b>Operation Temperature</b>	-15 to 60 °C (5 to 140 °F)