


G4 Eco LED Lamp STANDARD



PROJECT

CATALOG #


TYPE

NOTES

Specially engineered with a clear silicon capsule design, the economical, energy-efficient G4 LED replacement lamp provides retrofit capabilities for lighting fixtures with a G4 lamp base.

Quick Facts

- Compatible with any brand of low-voltage fixture that accepts a G4 base
- Silicone encapsulated
- Three intensity and two color temperature options
- Compatible with Luxor Low-Voltage Cube (LCM-LV)

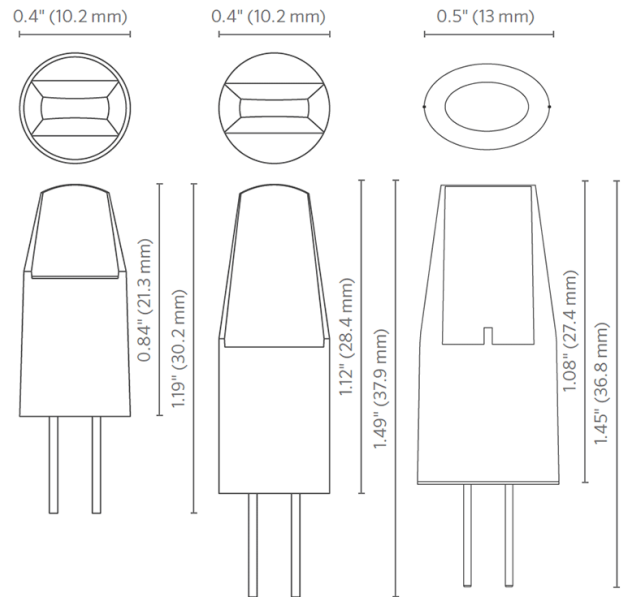

G4 Eco LED Lamp SPECIFICATIONS

	G4E1S	G4E1W	G4E2S	G4E2W	G4E3S	G4E3W
Total Lumens (lm)	90	85	150	145	200	195
Power Consumption (VA)	1.0	1.0	1.3	1.3	1.7	1.7
Efficacy (Lumens per Watt)	100	100	118	118	119	119
Color Temperature (CCT)	3000K	2700K	3000K	2700K	3000K	2700K
Color Rendering Index (CRI)	82	82	82	82	82	82
Halogen Equivalent (W)	10	10	20	20	35	35
Input Voltage (V)	10-15	10-15	10-15	10-15	10-15	10-15
Dimming	Phase, Trailing Edge	Phase, Trailing Edge	Phase, Trailing Edge	Phase, Trailing Edge	Phase, Trailing Edge	Phase, Trailing Edge
Minimum Rated Life (L70)	33,000 Hrs	33,000 Hrs	33,000 Hrs	33,000 Hrs	33,000 Hrs	33,000 Hrs

G4 Eco LED Lamp SPECIFICATIONS

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

Materials

Silicone

Weight

0.01 lbs (4.5 g)

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Input Voltage

10 to 15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high quality light at optimal energy efficiency, lifespan, and durability.

Warranty

3-year limited

Listings



G4 Eco LED Lamp ORDERING INFORMATION

[field_spec_builder_mount] [field_spec_builder_mount]


Fixture	Color Temp	Finish
G4	W Warm (2700K)	
	S Soft (3000K)	




EXAMPLE FIXTURE CONFIGURATION: *G4*-XX-XXXX-XX

G4 Eco LED Lamp PHOTOMETRICS


DL LED 10W ISOFOOTCANDLE PLOT

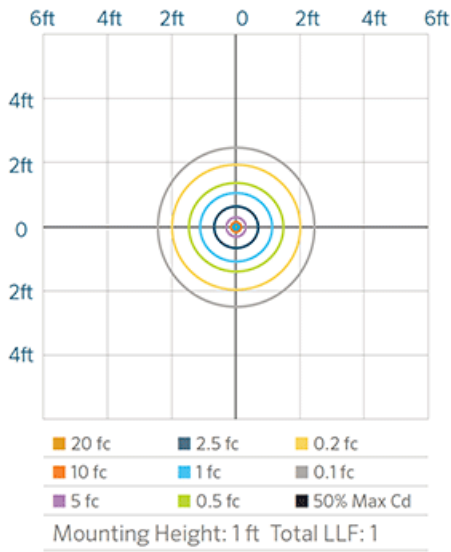


DL LED 20W ISOFOOTCANDLE PLOT

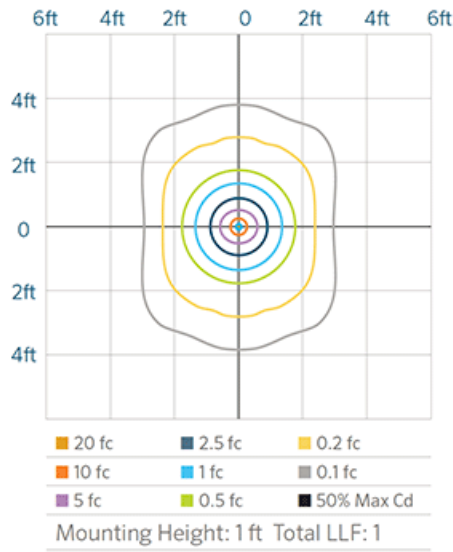


TM LED 10W ISOFOOTCANDLE PLOT

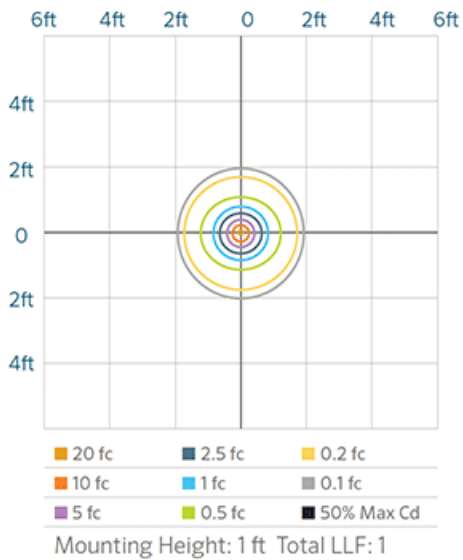


TM LED 20W ISOFOOTCANDLE PLOT

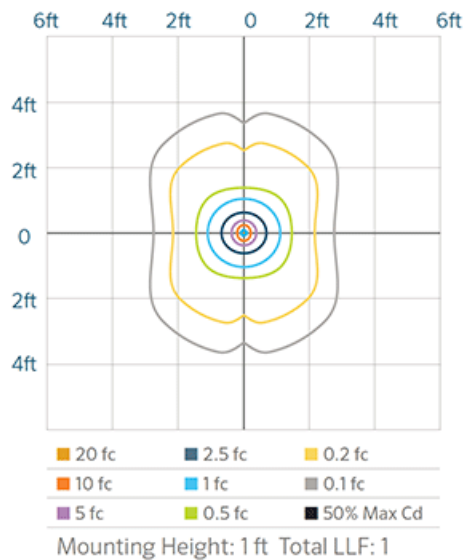


PL LED 10W ISOFOOTCANDLE PLOT

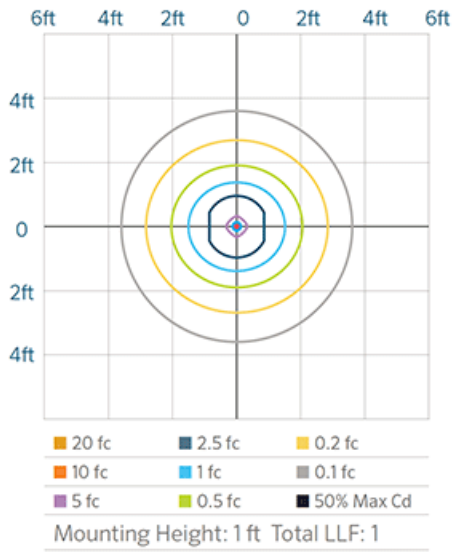


PL LED 20W ISOFOOTCANDLE PLOT

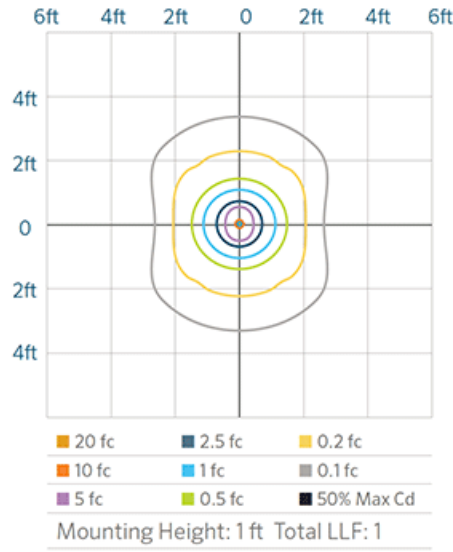


DM LED 10W ISOFOOTCANDLE PLOT

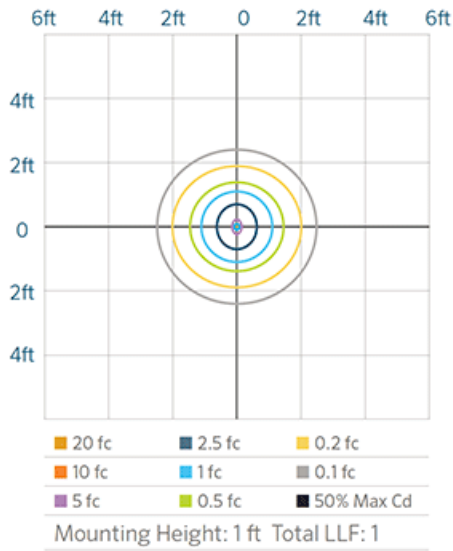

DM LED 20W ISOFOOTCANDLE PLOT

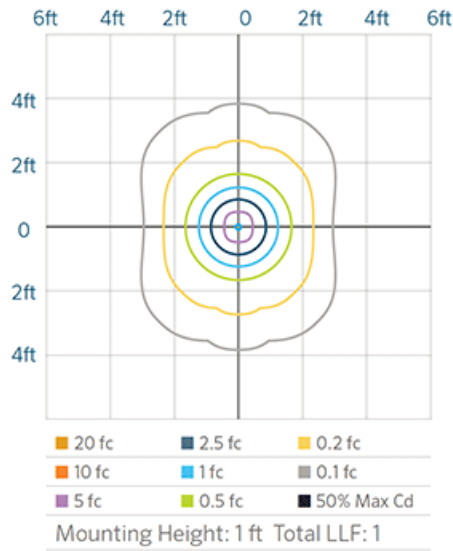

SP LED 10W ISOFOOTCANDLE PLOT

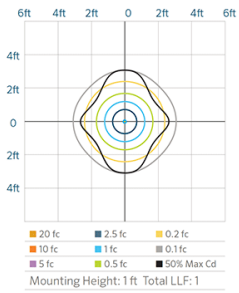

SP LED 20W ISOFOOTCANDLE PLOT

