

4K UHD

4K ULTRA Hi-Definition Professional Monitor

4K

Display Resolution

178°

View Angle



METAL CHASSIS



HDMI Input



4K75DHDE

BUILT TO RUN 24 X 7 X 365 CONTINUOUSLY

Overview

Our newly developed 75 inch professional monitor features a full 4K 3840 x 2160 resolution. These monitors accept 4K signals at the multiple and various interfaces: DisplayPort / 60p, HDMI 60p.

Features

- High Contrast 3840 x 2160 Resolution Panel with LED Backlight
- Anti-Reflection Front Coating
- Full 60fps Frame Rate
- Aspect Ratio: Auto / Full / 4:3 / 5:4 / 1:1
- Dynamic Contrast: ON / OFF
- Wide Viewing Angle
- 3D De-interlace
- Gamma Selection
- Industrial Grade Metal Cabinet


Industrial



Interface



Anti-Reflection

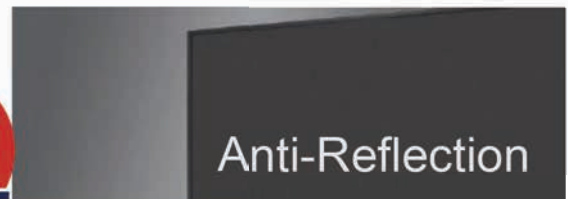

Specificatio

Display	
Screen Size	75 Inch
Max. Resolution	3840 x 2160
Pixel Pitch	0.429 x 0.429mm
Brightness	500cd/m2
Contrast Ratio	1200 : 1
Aspect Ratio	16 : 9
Viewing Angle (H/V)	178° / 178°
Display Color	1.07 Billion
Response Time	< 8ms
Video System	NTSC / PAL
Life Time(Typ.)	50,000Hrs
Interface	
Display Port In	1 In
HDMI In	2 In
VGA In (15Pin D-Sub)	1 In
Transmitter	
Remote Control	Yes
Audio	
Built-in Speakers	Yes
Features	
Multi Display Function	PIP / PBP
Filter Type	3D Comb Filter
Deinterlacing	Yes
Noise Reduction Control (NR)	Yes
Aspect Ratio	Full / 4:3 / 5:4 / 1:1
Dynamic Contrast	On / Off
Gamma Selection	Yes
General	
Outline Dimension (W x H x D)	1684 x 1027.43 x 280mm
Net Weight	70Kg (154.32lbs)
Material / Color	Metal / Black
Desk Top Stand	Foot Type
Consumption: < On	AC100 ~ 240V(50/60Hz)
Power Consumption	< 390W
Operating Temperature	0° ~ 40° C / 32° ~ 104° F
Storage Temperature	-20° ~ 60° C / -4° ~ 140° F
Mounts	
VESATM Mount Size	800 x 600mm


※ Design and specifications are subject to change without notice

Interface



- ① HDMI2 IN
- ② HDMI1 IN
- ③ DP IN : DP signal Input
- ④ VGA IN
- ⑤ Audio : Audio Line Input
- ⑥ USB : Only FW Update Input
- ⑦ AC Power : AC Power Input

Dimension

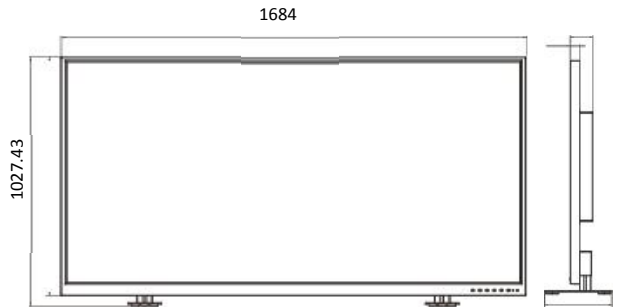

Overview

