

Product data sheet

Specifications



APC NetShelter Rack PDU Advanced, Metered Outlet, 3PH, 22.1kW 400V 32A or 17.3kW 415V 30A, 48 Outlets, IEC309

APDU10350MO

⚠ To be discontinued

⚠ To be discontinued on: Sep 3, 2025

Overview

Lead time Usually in Stock

Main

Color Black

Product or Component Type PDU

PDU Type Metered outlet

Cord length 5.9 ft (1.8 m)

Complementary

Input Voltage 415 V 3 phase
400 V 3 phase

Height 70.08 in (178.0 cm)

Width 2.20 in (5.6 cm)

Output Voltage 240 V

Depth 2.95 in (7.5 cm)

Product Weight 21.2 lb(US) (9.6 kg)

Mounting Location Side

Mounting preference No preference

Input Plug Type IEC 60309 30 A 3P+N+PE

Mounting Mode Rack-mounted

Rack units 0U

Mounting position Vertical

Communication Port Protocol 1000BASE-T
10/100BASE-T

Line Rated Current 24 A

Acceptable Input Voltage 200...240 V
346...415 V

Input current limits 30 A

Load Capacity 17300 VA

Input Frequency 50/60 Hz

Outlet type and quantity 24 C13/C15/C19/C21
24C13/C15

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environment

Product Certifications	UKCA TAA compliance BAA compliance
Standards	UL 62368-1 CSA C22.2 No 62368-1 FCC part 15 Subpart B CE EN 62368-1
IP Degree of Protection	IP44
Ambient air temperature for operation	23...140 °F (-5...60 °C)
Relative Humidity	5...95 %
Operating altitude	0...10000 ft
Ambient Air Temperature for Storage	-13...149 °F (-25...65 °C)
Storage Relative Humidity	5...95 %
Storage altitude	0...50000 ft (0.0000000000...15240.0000000000 m)

Ordering and shipping details

GTIN	731304439738
------	--------------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	77.95 in (198 cm)
Package 1 Width	5.20 in (13.2 cm)
Package 1 Length	10.31 in (26.2 cm)
Package 1 Weight	27.8 lb(US) (12.6 kg)

Contractual warranty

Warranty	3 years repair or replace
----------	---------------------------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	16222
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration


Use Again

Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Image of product / Alternate images

Alternative

Multiple color options available

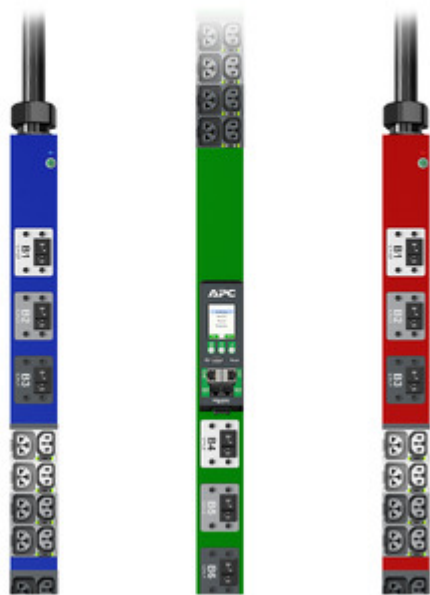

4-in-1 outlet for increased flexibility



Acts as any of these outlet types:



C13



C15



C19



C21













