

Product data sheet

Specifications



APC NetShelter Rack PDU Advanced, Switched Metered Outlet, 1Phase, 5.0kW, 208V 30A, 40 Outlets, L6-30P

APDU10151SM

⚠ To be discontinued

⚠ To be discontinued on: Sep 3, 2025

Overview

Lead time Usually in Stock

Main

Color	Black
Product or Component Type	PDU
PDU Type	Switched metered outlet
Cord length	9.8 ft (3.0 m)

Complementary

Input Voltage	208 V 1 phase
Height	58.66 in (149.0 cm)
Width	2.20 in (5.6 cm)
Output Voltage	208 V
Depth	2.95 in (7.5 cm)
Product Weight	17.2 lb(US) (7.8 kg)
Mounting Location	Side
Mounting preference	No preference
Input Plug Type	NEMA L6-30P
Mounting Mode	Rack-mounted
Rack units	0U
Mounting position	Vertical
Communication Port Protocol	1000BASE-T 10/100BASE-T
Line Rated Current	24 A
Acceptable Input Voltage	200...240 V
Input current limits	30 A
Load Capacity	4992 VA
Input Frequency	50/60 Hz
Outlet type and quantity	20 C13/C15/C19/C21 20C13/C15

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environment

Product Certifications	TAA compliance BAA compliance
Standards	UL 62368-1 CSA C22.2 No 62368-1 FCC part 15 Subpart B
IP Degree of Protection	IP44
Ambient air temperature for operation	23...140 °F (-5...60 °C)
Relative Humidity	5...95 %
Operating altitude	0...10000 ft
Ambient Air Temperature for Storage	-13...149 °F (-25...65 °C)
Storage Relative Humidity	5...95 %
Storage altitude	0...50000 ft (0.0000000000...15240.0000000000 m)

Ordering and shipping details

GTIN	731304439783
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	67.72 in (172 cm)
Package 1 Width	4.57 in (11.6 cm)
Package 1 Length	8.19 in (20.8 cm)
Package 1 Weight	21.6 lb(US) (9.8 kg)

Contractual warranty

Warranty	3 years repair or replace
-----------------	---------------------------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 11496

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard No

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant

REACH Regulation [REACH Declaration](#)

Use Again

Repack and remanufacture


Circularity Profile [End of Life Information](#)

Take-back No

WEEE  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Image of product / Alternate images

Alternative



Deploy IT gear faster

- 4-in-1 outlet to simplify planning
- Alternating phase and color-coded outlets
- Fast, flexible mounting


Handle high density loads

- More outlets and kW
- Slim design to fit more PDUs in one rack

Avoid downtime

- 60° operating temperature
- Environmental sensors
- Live swap display

Multiple color options available

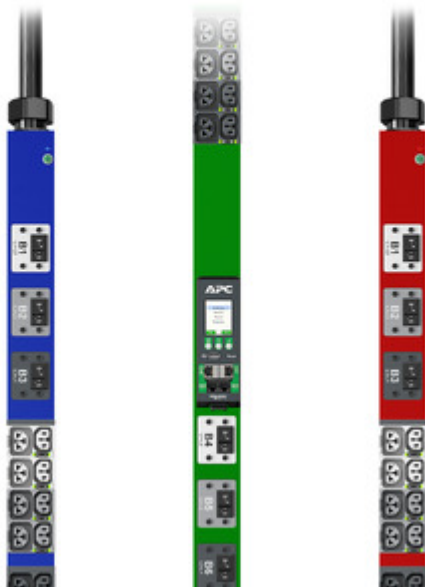

4-in-1 outlet for increased flexibility



Acts as any of these outlet types:



C13



C15



C19



C21











