Product data sheet

Specifications



APC Smart-UPS X, Line Interactive, 3kVA, Rack/tower convertible 2U, 100V-127V, 3x 5-15R+3x 5-20R+1x L5-30R NEMA,NMC, Extended runtime, 10ft input cord

SMX3KR2UNCX145

Overview

Lead time	Usually Ships within 2 Weeks

Main

Main Input Voltage	120 V
Product or Component Type	Uninterruptible power supply (UPS)
Other Input Voltage	100 V 110 V 127 V
Main Output Voltage	120 V
Other Output Voltage	100 V 110 V 127 V
Kw Rating	2700 W
Rated power in VA	2880 VA
Input Connection Type	NEMA L5-30P
output connection type	3 NEMA 5-15R 3 NEMA 5-20R 1 NEMA L5-30R
Number of rack unit	2U
Cable length	10 ft (3.05 m)
Number of cables	1
Provided equipment	CD with software Documentation CD Installation guide Rack mounting hardware Rack Mounting brackets Rack Mounting support rails Removable support feet Smart UPS signalling RS-232 cable USB cable Web/SNMP Management Card
Range of Product	Smart-UPS

Batteries & Runtime

Battery Type	Lead-Acid battery
Extendable Run Time	1
Included Battery Modules	0

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Battery Slots Empty	0
Typical recharge time	3 h
RBC Quantity	1
Battery life	3…5 year(s)
Replacement battery	APCRBC117

General

Number of power module	0
Number of power module filled slots	0
Number of power module free slots	0
product web sub-family	Extended run
Redundant	No
Variant option	Line Cord Length
Topology	Line Interactive

Physical

color	Black
Height	3.35 in (8.5 cm)
Width	17.01 in (43.2 cm)
Depth	26.26 in (66.7 cm)
Product Weight	84.59 lb(US) (38.37 kg)
Mounting Location	Front
Mounting preference	Lower
Mounting Mode	Rack-mounted
Two post mountable	0
USB compatible	No

Input

Efficiency at full load	70...153 V
Input Frequency	50/60 Hz +/- 3 Hz auto-sensing

Output

Harmonic distortion	Less than 5%
Maximum configurable power in VA	2880 VA
Max Configurable Power (Watts)	2700 W
Maximum output current	15 A
Transfer Time	4ms typical : 8ms maximum
Waveform Type	Sine wave
Output frequency	50/60 Hz +/- 3 Hz sync to mains

Conformance

Product Certifications	BSMI CSA NOM TÜV VCCI Class A
Equipment protection policy	Lifetime : $150000

Environmental

Acoustic level	55 dBA
Online Thermal Dissipation	276 Btu/h
Operating altitude	0...10000 ft
Ambient air temperature for operation	32…104 °F (0…40 °C)
Ambient Air Temperature for Storage	5…113 °F (-15…45 °C)
Storage altitude	0…50000 ft (0.0000000000…15240.0000000000 m)
Relative Humidity	0…95 %
Storage Relative Humidity	0…95 %

Communications & Management

Emergency Power Off (EPO)	Yes
Free slots	0
Pre-Installed SmartSlot™ Cards	Network management card 2 with environmental monitoring
Control panel	LED status display with on line : on battery : replace battery and overload indicators
Alarm	Alarm when on battery : distinctive low battery alarm : configurable delays

Surge Protection and Filtering

Surge energy rating	540 J
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : m

Ordering and shipping details

GTIN	731304402800

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.57 in (24.3 cm)
Package 1 Width	34.21 in (86.9 cm)
Package 1 Length	23.46 in (59.6 cm)
Package 1 Weight	99.78 lb(US) (45.26 kg)
Package 3 Weight	855.13 lb(US) (387.88 kg)
Pallet unit layers	2
Pallet layers	4

Contractual warranty

Warranty	3 years repair or replace (excluding battery) and 2 years for battery

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
REACh Regulation	REACh Declaration

Use Again

Repack and remanufacture


Circularity Profile	End of Life Information
Removable battery	User replaceable
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Image of product / Alternate images

Alternative





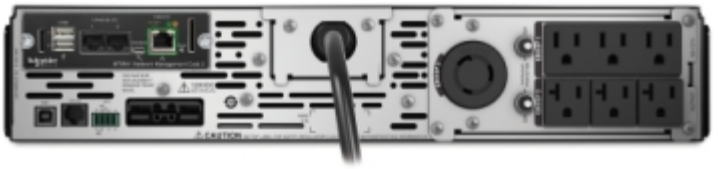




APC