


Decora Plus™ Duplex Receptacles

Heavy-Duty Industrial Specification and Hospital Grades

Isolated Ground

15 A & 20 A, 125 V

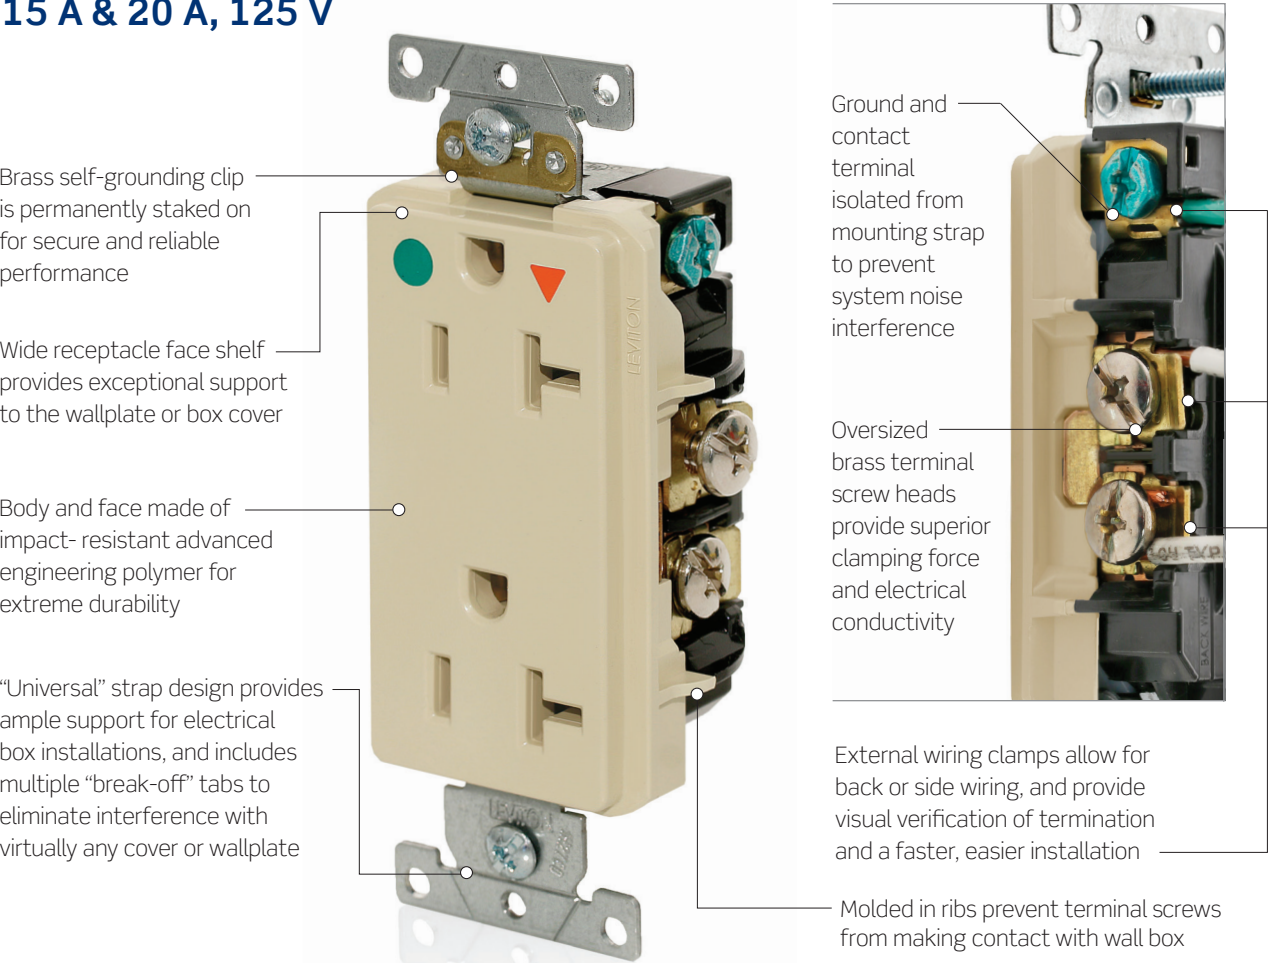

Ordering Information

		Specification Grade		Hospital Grade	
Ratings		15 A/ 125 V	20A/ 125 V	15 A/ 125 V	20 A/ 125 V
NEMA Config.		5-15R	5-20R	5-15R	5-20R
Order ID	Orange	16262-OIG	16362-OIG	D8200-IG	D8300-IG
	Ivory	16262-IIG	16362-IIG	D8200-IGI	D8300-IGI
	White	16262-WIG	16362-WIG	D8200-IGW	D8300-IGW
	Gray	16262-GIG	16362-GIG	D8200-IGG	D8300-IGG
	Red	16262-RIG	16362-RIG	D8200-IGR	D8300-IGR
	Brown	16262-BIG	16362-BIG	D8200-IGB	D8300-IGB
	Black	16262-EIG	16362-EIG	D8200-IGE	D8300-IGE
	Lt. Almond	16262-TIG	16362-TIG	D8200-IGT	D8300-IGT

Common Applications:

- Educational Facilities
- Office Environments
- Hospitals/Medical Buildings
- Hospitality
- Day Care Centers


Specifications

Series	16262-IG/D8200-IG	16362-IG/D8300-IG
AC Horsepower Rating		
At Rated Voltage	½ HP	1 HP
Electrical Specifications		
Amperage	15 A	20 A
NEMA	5-15R	5-20R
Voltage	125 V	
Grounding	Self-Grounding*	
Pole	2	
Wire	3	
Dielectric Voltage	Withstands 3000 V min	
Temperature Rise	Max 30 °C temperature rise at full rated current	
Environmental Specifications		
Flammability	UL94 V0	
Operating Temperature	Maximum Continuous 75 °C, minimum -40 °C (w/o impact)	
Material Specifications		
Face	PBT Polyester Blend	
Body	PBT Polyester Blend	
Strap	Steel (Galvanized G60)	
Ground Contact	0.030” Brass	
Ground Screw	#8 Hex Head, Triple-Drive Brass	
Ground Clamp	Brass	
Ground Clip	Brass	
Mounting Screw	Triple-Drive Plated Steel	
Line Contacts	0.030” Phosphor Bronze	
Terminal Clamp	Brass	
Terminal Screws	#8 Triple-Drive Brass	
Shutter Mechanism	Acetal	
Mechanical Specifications		
Product ID	Ratings are permanent part of devices	
Terminal ID	Brass - Hot, Silver - Neutral, Green - Ground	
Terminal Accommodation	#14 - #10 AWG	
Wire Types	Stranded or Solid	
Termination	Back and Side Wire	
Standards & Certifications		
NEMA	WD 1 & WD 6	
ANSI	C-73	
Certification/Listing	cULus, NOM-ANCE	
Applicable Standards	UL498, Fed Spec W-C-596, CSA C22.2 No.42	
RoHS	RoHS Compliant	
Warranty		
Product Warranty	10 Years	


* Self-grounding when installed in a properly grounded metallic box

Dimensions

Front View

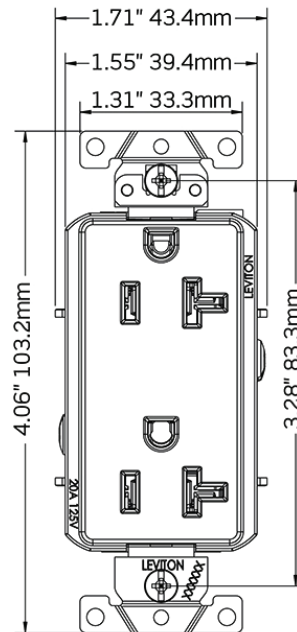

Side View

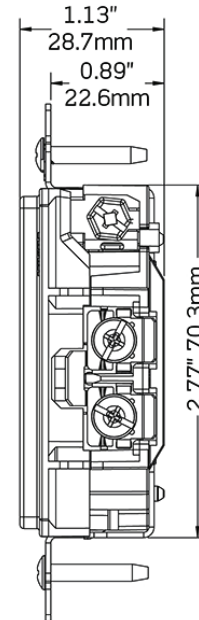

Visit our Website at:
www.leviton.com/commercial
 email: commercial@leviton.com

Q-1111

110817

Leviton Manufacturing Co., Inc.

201 N Service Rd, Melville, NY 11747
 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538
 Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

© 2017 Leviton Manufacturing Co., Inc. All rights reserved.

