

PARALLEL SPLICE CONNECTORS

1

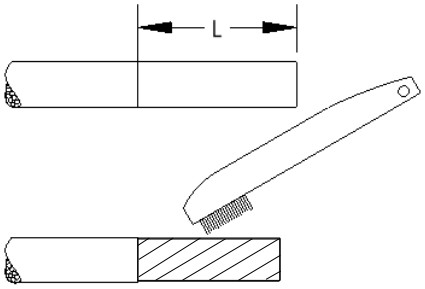



CU ONLY

NO AL





2






(OR)






HEAT SHRINK INSTALLATION INSTRUCTIONS

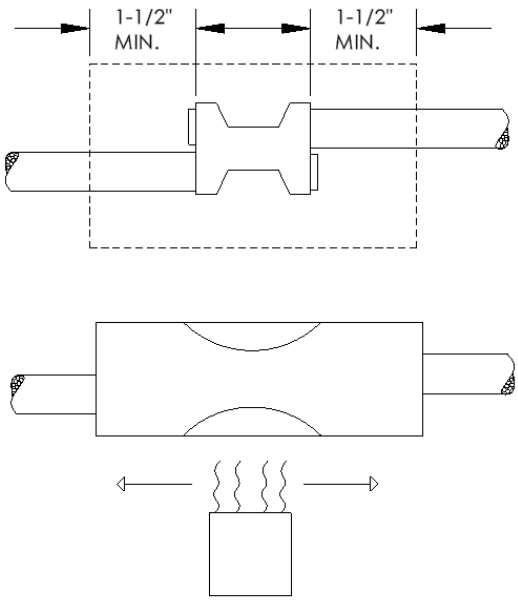

(OR)

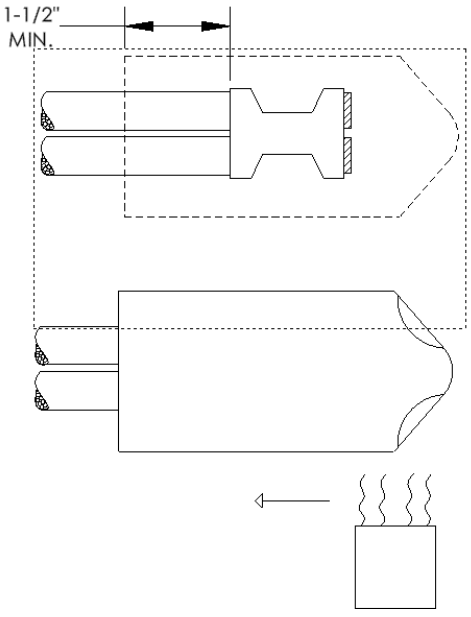

Tool Chart for Compression Connector Type PSC with Compact & Code Class B Copper Cable, Class 5f Copper Metric Wire

				Panduit Tool Part Number Die Color, Index Number, (Number of Crimps)				
Splice Color	Panduit Part Number	L Wire Strip Length (In.)	AWG/Metric Str Cu Wire Range	CT-980 CT-980CH CT-2980	CT-2001 CT-2002 CT-2002CH CT-3001	CT-920, CT-930, CT-2940*, CT-920CH, CT-930CH, CT-940CH*, CT-2920, CT-2930, CT-2931	Recommended Heat Shrink End Cap	Recommended Thick Wall Heat Shrink
Red	PSCRED-L	7/16 3/4	#12-#10 Metric Class 5f (1) 2.5mm² w/ (1) 6 mm²	---	CD-2001-8-SET Red P21 (1)	CD-920-8 Red P21 (1)	HSECFR0.5-X	HST0.4-6-3
Blue	PSCBLU-L	7/16 3/4	#12-#6 Metric Class 5f (1) 2.5 mm² w/ (1) 10 mm² (1) 6 mm² w/ (1) 10 mm²	---	CD-2001-6-SET Blue P24 (1)	CD-920-6 Blue P24 (1)		
Gray	PSCGRY-L	7/16 3/4	#12-#4 Metric Class 5f (1) 6 mm² w/ (1) 16 mm² (1) 10 mm² w/ (1) 16 mm²	(1) ---	CD-2001-4-SET Gray P29 (1)	CD-920-4 Gray P29 (1)		
Brown	PSCBRN-L	11/16	#12-#2	(1)	CD-2001-2-SET Brown P33 (1)	CD-920-2 Brown P33 (1)	HSECFR0.8-X	HST0.8-6-3
Green	PSCGRN-L	11/16	#12-#1	(1)	CD-2001-1-SET Green P37 (1)	CD-920-1 Green P37 (1)		
Pink	PSCPNK-L	11/16	#12-1/0	(1)	CD-2001-1/0-SET Pink P42 (1)	CD-920-1/0 Pink P42 (1)		
Black	PSCBLK-Q	7/8	#12-2/0	(1)	CD-2001-2/0-SET Black P45 (1)	CD-920-2/0 Black P45 (1)		
Orange	PSCORG-Q	7/8	#12-3/0	(1)	CD-2001-3/0-SET Orange P50 (1)	CD-920-3/0 Orange P50 (1)	HSECFR1.0-X	HST1.1-6-3
Purple	PSCPUR-Q	1	#12-3/0	(1)	CD-2001-4/0-SET Purple P54 (1)	CD-920-4/0 Purple P54 (1)		
Yellow	PSCYEL-Q	1-1/16	#12-3/0	(1)	CD-2001-250-SET Yellow P62 (1)	CD-920-250 Yellow P62 (1)		

*CD-920 dies can be used with CT-940CH tool and CT-2940 tool with CD-940-DA adapter.
Compact stranding is #8 AWG to 3/0 AWG only.

Color Coded Chart

