




### Instructions

1. Slide the colored leads onto the switch terminals (shown below).

NOTE: 'N' version is compatible with 1-3/4" (44.4mm) (or larger) narrow-frame profiles.

Specifications are subject to change without notice.

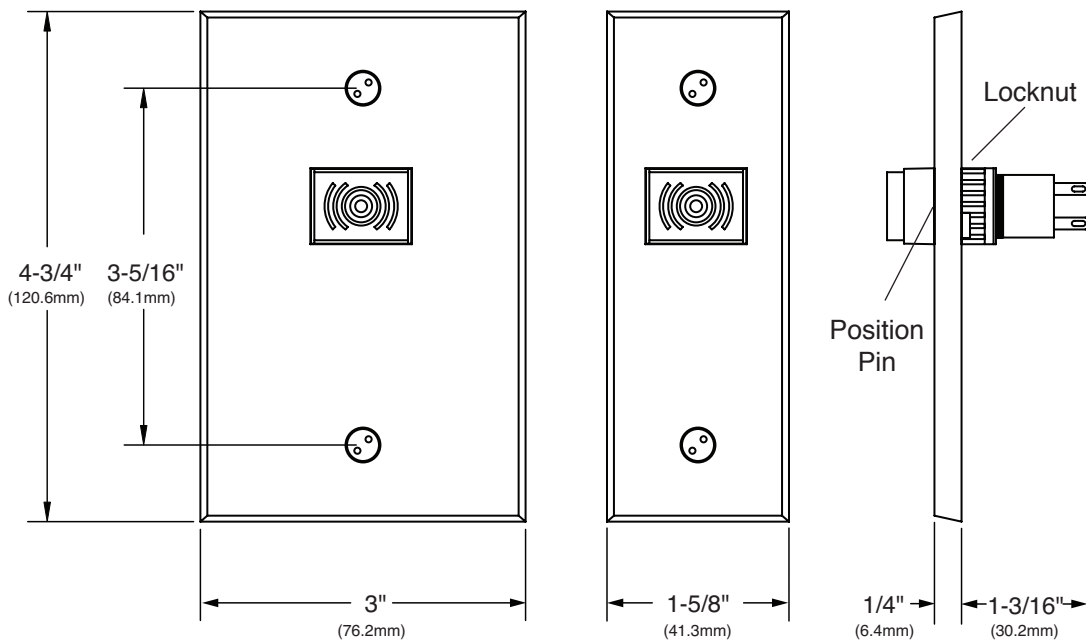

**Voltage:** 10 to 26VDC

**Current Consumption:**  $\leq$  20mA

**Sound Pressure Level:** 80-96dB @ 0.1m

**Tone Frequency:** 2.0 kHz

**For Intermittent Tone**

Positive (+) on A terminal; Negative (-) on B terminal

**For Constant Tone**

Positive (+) on B terminal; Negative (-) on A terminal