
# 2kW 100-127V Single-Phase Basic PDU - 36 NEMA 5-15/20R Outlets, L5-20P Input (5-20P Adapter), 15 ft. Cord, 72 in. 0U Rack

MODEL NUMBER: **PDUV20-72**

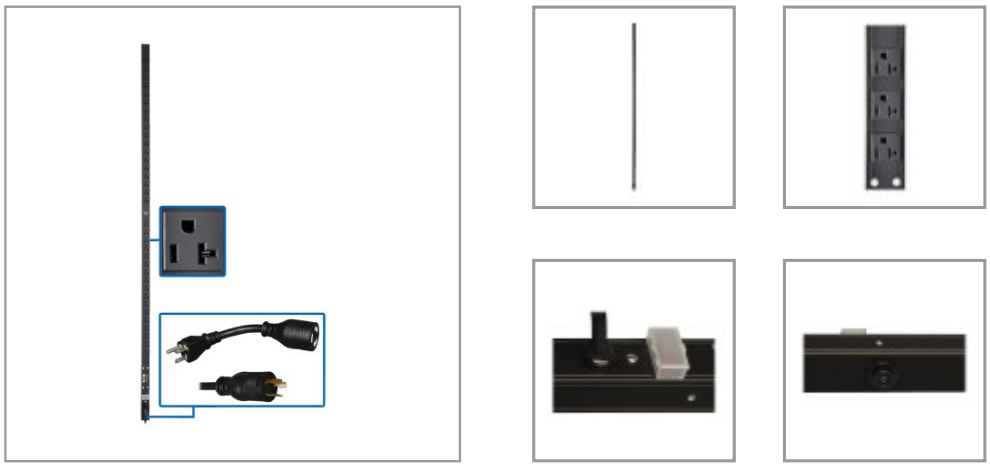

Delivers 120V single-phase AC power to multiple loads from a utility outlet, generator or UPS system in a data center or network closet.

## Features

**Single-Phase 100-127V rack PDU (rPDU) Distributes Network-Grade Power to Multiple Loads**
This basic PDU is an ideal no-frills unit for networking, telecom, security, audio/video and sound reinforcement applications. Recommended for small to mid-sized data centers, computer rooms and network closets, the PDUV20-72 features 36 NEMA 5-15/20R outlets for connecting equipment. A 15-foot cord with L5-20P input plug (and included 5-20P adapter) connects to your facility's AC power source, generator or protected UPS system to distribute power to connected loads.

**Up-to-Date Safety Features Protect Your Vital Equipment**
A lighted on/off switch is protected by a transparent plastic cover to help prevent an accidental shutdown that could lead to costly downtime. A 20A circuit breaker protects connected components from dangerous overloads.

**Versatile Installation Options Give You Plenty of Choices**
The 72-inch 0U PDU mounts vertically in an EIA-standard 19-inch rack using the included toolless mounting buttons or the included mounting clips and hardware. You may also use the clips to secure the PDU to a wall, counter or other flat, secure surface. Bolt-down retention brackets keep power cords organized and your rack free of clutter.

## Highlights

- Ideal no-frills PDU for telecom, security, audio/video and other network applications
- 36 NEMA 5-15/20R outlets distribute AC power to connected equipment
- Lighted power switch with protective cover helps prevent accidental shutdowns
- 15 ft. cord with L5-20P input (and 5-20P adapter) connects to AC power source
- 72 in. 0U PDU with included mounting brackets installs in rack or under counter

## Applications

Deliver network-grade power to high-density equipment in networking, telecom, security, audio/video and sound reinforcement applications

## Package Includes

- PDUV20-72 1.9kW 100-127V Single-Phase Basic PDU
- L5-20P to 5-20P input plug adapter
- Plug retention brackets with installation hardware
- Rack-mounting hardware
- Owner's manual

# Specifications

| | |
|---|---|
| **OVERVIEW** | |
| UPC Code | 037332255822 |
| PDU Type | Basic |
| **INPUT** | |
| Input Phase | Single-Phase |

| | |
|---|---|
| PDU Input Voltage | 100; 120; 125; 127 |
| Recommended Electrical Service | Single-phase 20A 120V service |
| Maximum Input Amps | 16 |
| Maximum Input Amps Details | Agency de-rated to 16A continuous |
| PDU Plug Type | NEMA 5-20P; NEMA L5-20P |
| Input Cord Length (ft.) | 15 |
| Input Cord Length (m) | 4.57 |
| **OUTPUT** | |
| Output Capacity Details | 2.03kW (127V), 1.92kW (120V), 1.6kW (100V) / 16A total capacity; 16A max per outlet |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (36) 5-15/20R |
| Output Nominal Voltage | 100-127V |
| Overload Protection | 20A circuit breaker |
| **USER INTERFACE, ALERTS & CONTROLS** | |
| Switches | Lighted on/off switch with integrated transparent saftey cover |
| **SURGE / NOISE SUPPRESSION** | |
| Automatic Shut-Off | No |
| **PHYSICAL** | |
| Material of Construction | Aluminum |
| Rack Height | 0U |
| Form Factors Supported | Vertical |
| PDU Form Factor | Vertical (0U) |
| Shipping Dimensions (hwd / in.) | 2.40 x 6.65 x 75.79 |
| Shipping Weight (kg) | 3.48 |
| Unit Dimensions (hwd / in.) | 72.470 x 1.500 x 1.640 |
| Unit Dimensions (hwd / cm) | 184.1 x 4.2 x 3.81 |
| Unit Weight (lbs.) | 6.14 |
| Unit Weight (kg) | 2.79 |
| **ENVIRONMENTAL** | |
| Operating Temperature Range | 32° to 104°F (0° to 40°C) |
| Storage Temperature Range | -22° to 122°F (-30° to 50°C) |
| Relative Humidity | 5% to 95% non-condensing |
| Operating Elevation | 0-10000 ft. (0-3000 m) |

| | |
|---|---|
| **STANDARDS & COMPLIANCE** | |
| Product Certifications | CSA (Canada); NOM (Mexico); UL 60950-1 |
| Product Compliance | RoHS |
| **WARRANTY & SUPPORT** | |
| Product Warranty Period (Worldwide) | 2-year limited warranty |

1000 Eaton Boulevard
Cleveland, OH 44122
United States
https://tripplite.eaton.com

© 2025 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.