

LMSC1000/LMUNTG/LMHNTG LIFTMASTER® PROPRIETARY RFID LONG-RANGE READER AND VEHICLE TAGS

Total access solution.

KEY FEATURES



LIFTMASTER PROPRIETARY COMMUNICATION
Operates Seamlessly with CAPXLV2, CAPXM and CAP2D*

NON-TRANSFERABLE DUAL-PURPOSE TAG
Breaks on Removal

PASSIVE TAGS
No Battery Needed

SMART

READS RFID TAGS 20–30' AWAY, REDUCING VEHICLE CONGESTION.

SIMPLE DISTANCE ADJUSTMENTS WITH RF DIAL ON WIEGAND MODULE; NO NEED FOR LAPTOP.

VERSATILE DUAL-PURPOSE RFID TAG CAN BE MOUNTED TO HEADLAMP OR WINDSHIELD (PLASTIC OR GLASS SURFACES; NO BATTERY REQUIRED).

RELIABLE

DURABLE APPLICATION: ABLE TO WITHSTAND MOST CLIMATES, TEMPERATURES AND CONDITIONS.

UL® 294 TESTED FOR PROVEN DEPENDABILITY.

COMPREHENSIVELY TESTED TO ENSURE RFID SYSTEM WORKS SEAMLESSLY WITH CAPXLV2, CAPXM, CAP2D AND myQ® Community TO CONTROL YOUR LIFTMASTER GATE OPERATORS.

SECURE

UNIQUE IDENTIFICATION APPLIED TO EACH INDIVIDUAL TAG FOR COMMUNITY AND VISITOR TRACEABILITY.

NON-TRANSFERABLE AND DESIGNED TO BREAK ON REMOVAL TO PREVENT RFID TAGS FROM BEING STOLEN OR MISUSED.

SEAMLESS OPERATION BY LIFTMASTER PROPRIETARY RFID TAGS, WORKING EXCLUSIVELY WITH OUR RFID READER.

RFID SOLUTION:

RFID READER
Designed for quick installation and easy access.



LMSC1000

DUAL-PURPOSE VEHICLE RFID TAG (WINDSHIELD/HEADLAMP)**
Passive identification device (no battery required) for use on vehicle plastic or glass surfaces.



LMUNTG

REARVIEW MIRROR RFID HANG TAG**
Convenient and easy solution for visitor passes, loaner vehicles, student/faculty parking and employee access control.



LMHNTG

TOTAL SOLUTION:

SMART VIDEO INTERCOM L
Cloud-based access control for residents and guests.



CAPXLV2

2-DOOR CONTROLLER
Cloud-based, credentialed access control.



CAP2D

PASSPORT RECEIVER[†]
Expand your solution to include radio controls such as the Security+ 2.0® receiver, compatible with all standard Wiegand protocols.



PPWR

GATE OPERATORS
CSW24UL/CSL24UL/HCTDCUL
Ensure quick and safe access for residential communities and commercial applications. Pair with CAPXLV2 for remote system diagnostics.



GATES

*If specific facility code and start ID are required, use special part numbers SPLMUNTG and SPLMHNTG.

[†] Only needed with CAP2D.

MASTERFUL ENGINEERING.

LMSC1000 /
LMUNTG / LMHNTG

CAPACITIES



- Long-Range Reader Recognizes RFID Tags 20–30' Away
- Reader Passes Information to LiftMaster Access Control System
- Tag Specifications
 - Facility Code Range: 1–255
 - ID Range: 1–65,535

POWER



- Power Supply: 12VDC, 3A (Included)
- Power Supply Needs to Be Plugged into a 120VAC, 60 Hz Supply
- Power Supply and Wiegand Module Require a Waterproof Enclosure

DIMENSIONS



- LMSC1000 LiftMaster RFID Reader: 10.25" W x 10.25" L x 1.25" D
- LMUNTG LiftMaster Dual-Purpose RFID Tag: 1.0" W x 3.15" L
- LMHNTG LiftMaster RFID Hang Tag: 3.25" W x 4.75" L

10.25"




10.25" 1.25"

MECHANICS



- LiftMaster Proprietary System/Reader (LMSC1000) Functions Only with LiftMaster Proprietary Tags (LMUNTG/ SPLMUNTG, LMHNTG/SPLMHNTG)
- Reader Features Various Mounting Options for Quick and Easy Installation (Square or Round Post Installations; U-Bolts Included)
- One-Piece Design of Tags Is Easy to Read and Aesthetically Pleasing
- Dual-Purpose Tags (LMUNTG) are Non-transferable, Becoming Inoperable Once Adhesion Is Broken
- LiftMaster Hang Tags (LMHNTG) Are a Convenient Solution That Offer Flexibility for Users
- Tags Can Be Mounted Horizontally (Preferred) or Vertically

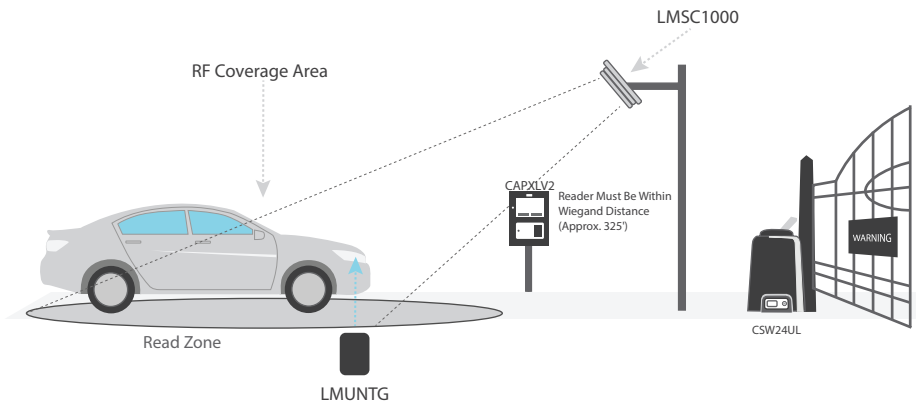

STANDARD SPECS.

FCC AND INDUSTRY CANADA COMPLIANT

ANTENNA

- Circular Polarized

FREQUENCY RANGE

- 902–928 MHz

SUPPORTED PROTOCOL

- ISO 18000-6C/EPC C1 G2
- ISO 18000-6B

READ RANGE

- 20–30' (Depending on Tag Placement)

OPERATING TEMPERATURE **-4°F to 122°F**
(-20°C to 50°C)

WARRANTY

- 1 Year

STORAGE TEMPERATURE

- -4°F to 176°F
- (-20°C to 80°C)

CONNECTIVITY

- 26-Bit Wiegand (D0, D1, GND)

INPUT

- (1) Power Input
- (1) Loop Detector Input

OUTPUT

- (1) Wiegand Output

SHIPPING.

SHIPPING WEIGHT (in lbs.)

CARTON (1)

- 19" x 14.25" x 4.25"
- LMSC1000 RFID Reader
- Wiegand Module
- Power Supply
- Mounting Brackets
- U-Bolts



6.7

SERVICE KITS.

K-AUMB

- RFID Mounting Bracket

K-S2W

- Wiegand Interface Module

KSC12-3A

- RF Power Supply 3-amps

For Support Tools and Training Videos, Visit LiftMasterTraining.com

For More Information, Visit LiftMaster.com/AccessControl

Sales Support: **800.282.6225**
Technical Support Center: **800.528.2806**
LiftMasterDealer.CustHelp.com/App/Ask

