

HIKVISION

DS-7316HUI-K4-32TB: Digital Video Recorder

General Information/Key Features

- UPC: 00842571114294
- Product Line: TurboHD
- Free DDNS
- Long Distance Transmission
- Bi-Directional Audio Communication

Related Pages (Right click to open in new tab)

Shop Now. Visit the [DS-7316HUI-K4-32TB](#) product page for detailed information

View [other Hikvision Digital Video Recorders](#)

View over 1300 [video surveillance products from Hikvision](#)

Scroll down to view the Hikvision DS-7316HUI-K4-32TB specification sheet



HIKVISION

DS-7316HUI-K4-32TB

<https://www.surveillance-video.com> is a distributor/reseller of over 120,000 security products from over 100 brands.

For over 45 years, we have earned the confidence of our customers by providing professional service and support.

If you need technical support or assistance to install your security system or any other products purchased from Surveillance-video.com, you can call us @ **800-955-5201** at any time.

DS-73xxHUI-K4 Series

TurboHD DVR



- **HDMI Output at up to 4K (3,840 x 2,160) Resolution**
- **H.265 Pro+/H.265 Pro/H.265 Main Stream Encoding**
- **Self-Adaptive HD-TVI/CVBS Signal Input**
- **Long Distance Transmission over UTP and Coaxial Cable: Maximum of 800 m for 1080p and 1,200 m for 720p HD-TVI Signal**
- **Synchronous Playback**
 - DS-7308HUI-K4: 8-ch
 - DS-7316HUI-K4: 16-ch

TurboHD DS-73xxHUI-K4 Series DVRs support up to 4K output resolution and offer camera support on up to 16 channels. They offer long transmission distances and feature the latest H.265+ compression technology, which improves recording efficiency and reduces data storage costs.

Additionally, the DS-73xxHUI-K4 Series DVRs support advanced analytics such as line crossing, intrusion, scene change detection, people counting, heat map functionality, and Video Quality Diagnostics (VQD).

Available models:

DS-7308HUI-K4: 8 channels


DS-7316HUI-K4: 16 channels

Specifications

	DS-7308HUI-K4	DS-7316HUI-K4
Video/Audio Input		
Video Compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264	
Analog Video Input	8-ch BNC interface (1.0 Vp-p, 75 Ω), supports Hikvision-C UTC protocol	16-ch
HD-TVI Input	5 MP, 4 MP, 3 MP, 1080p25, 1080p30, 720p25, 720p30, 720p50, 720p60	
CVBS Input	Supported	
IP Video Input	Up to 8 MP resolution Supports H.265+/H.265/H.264+/H.264 IP cameras	16-ch ²
Audio Compression	G.711u	
Audio Input	4-ch, RCA (2.0 Vp-p, 1K Ω)	
Video/Audio Output		
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: NTSC 704 × 480	
HDMI/VGA Output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz	
HDMI2 Output	1-ch, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz	
Encoding Resolution	8 MP/5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF	
Frame Rate	Main stream: 8 MP @ 8 fps; 5 MP @ 12 fps; 4 MP @ 15 fps; 3 MP @ 18 fps; 1080p/720p/WD1/4CIF/VGA/CIF @ 30 fps Sub-stream: WD1/4CIF/CIF @ 30 fps	
Video Bit Rate	32 Kbps to 10 Mbps	
Audio Output	2-ch, RCA (linear, 1K Ω)	
Audio Bit Rate	64 Kbps	
Dual Stream	Supported	
Stream Type	Video, Video & Audio	
Synchronous Playback	8-ch	16-ch
Network Management		
Remote Connections	128	
Network Protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, SNMP	
Hard Disk		
SATA	4 SATA interfaces	
eSATA	Supported	
Capacity	Up to 10 TB capacity for each disk	
Disk Array		
Array Type	RAID 0, RAID 1, RAID 5, RAID 6, RAID 10	
External Interface		
Two-Way Audio Input	1-ch, RCA (2.0 Vp-p, 1K Ω) (independent)	
Network Interface	2, RJ-45 10M/100M/1000M self-adaptive Ethernet interface	
USB Interface	Front panel: 2 × USB 2.0; rear panel: 1 × USB 3.0	
Serial Interface	RS-232, RS-485 (full-duplex), keyboard	
Alarm In/Out	16/4	
General		
Power Supply	100 to 240 VAC, 50 to 60 Hz, 1.2 A	
Consumption (w/o HDD)	≤45 W	≤65 W
Working Temperature	14° to 131° F (-10° to 55° C)	
Working Humidity	10% to 90% non-condensing	
Dimensions (W x D x H)	17.5" x 15.4" x 2.8" (445 mm x 390 mm x 70 mm)	
Weight (w/o HDD)	≤11.0 lb (≤5 kg)	


Physical Interfaces

DS-7308HUI-K4

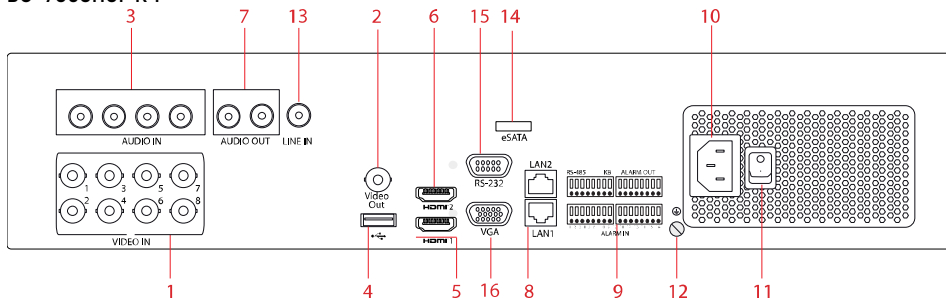

1	Video In
2	Video Out
3	Audio In, RCA Connectors
4	USB Interface
5	HDMI1 Interface
6	HDMI2 Interface
7	CVBS Audio Out and VGA Audio Out
8	LAN1 and LAN2 Network Interfaces
9	RS-485 Serial Interface, Keyboard Interface, Alarm In, and Alarm Out
10	100 to 240 VAC Power Input
11	Power Switch
12	GND
13	Line In
14	eSATA Interface
15	RS-232 Serial Interface
16	VGA Interface

DS-7316HUI-K4

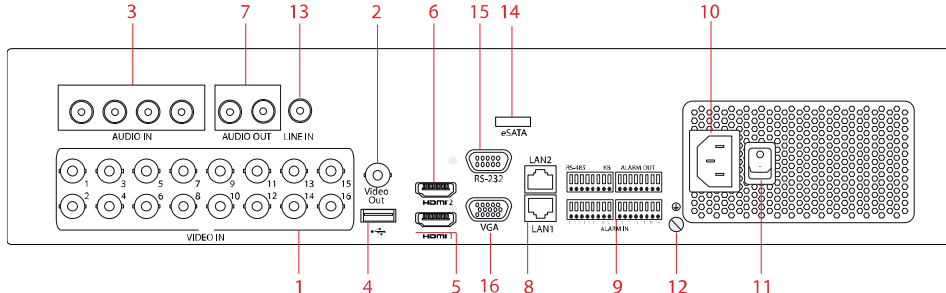

¹Up to 16 IP channels if Enhanced IP Mode is enabled and all analog channels are disabled. Enhanced IP Mode and Enhanced VCA Mode cannot run simultaneously.

²Up to 32 IP channels if Enhanced IP Mode is enabled and all analog channels are disabled. Enhanced IP Mode and Enhanced VCA Mode cannot run simultaneously.